


ASSEMBLY AND INSTALLATION INSTRUCTIONS

L0001 / L0002 / L0003 / L0004

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.

Hardware Package (included):

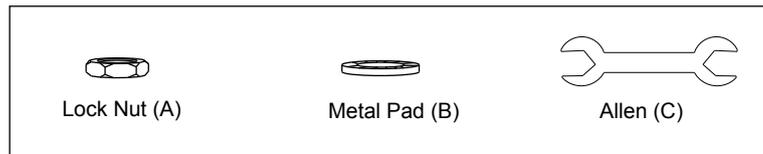


Warning: LED electronics can be damaged by electro static discharge (ESD) shock. Before installation, discharge yourself by touching a grounded bare metal surface to remove this hazard. To avoid damage, do not touch the LED module.


Installation Steps (K0022/K0023)


1. Attach the column into the hole of base and tighten it with metal pad and lock nut.
2. Pull the fixture wires and insert the arm into the hole of column and tighten it with set screw.
Make sure the screw hole of column aligns with threaded hole of arm and arm in the middle of the base.

Adjusting the length of the inner arm (Fig.1,2,3)

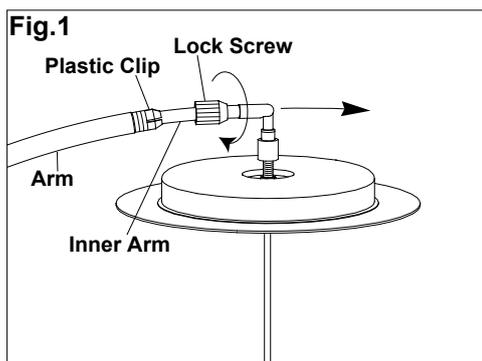


3. Unscrew the lock screw from the arm to slide the inner arm out from the arm. (Fig.1)
Note: Hold the inner arm up for succeeding in unscrewing lock screw and to prevent it from scuffing.

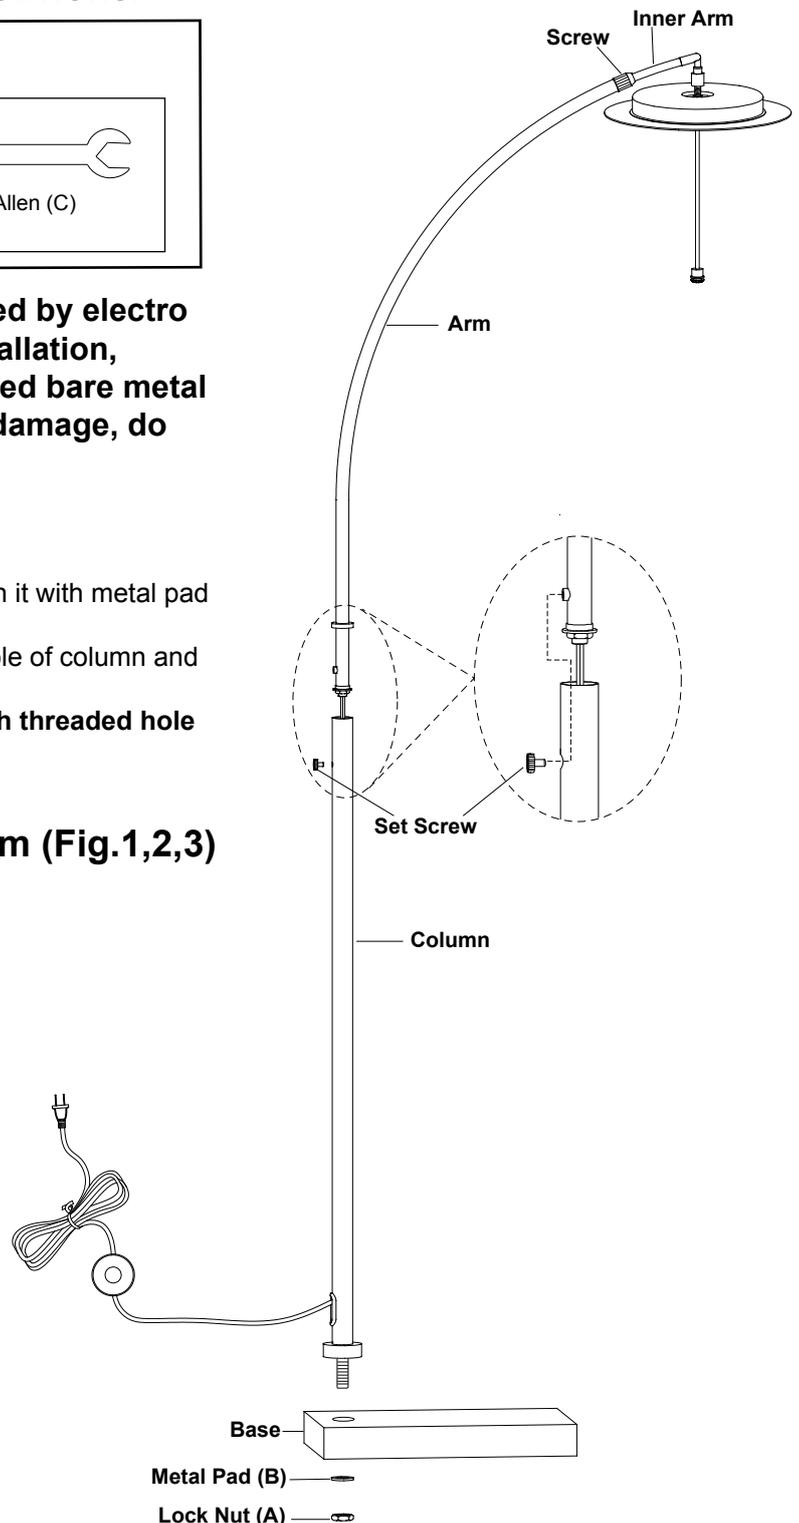

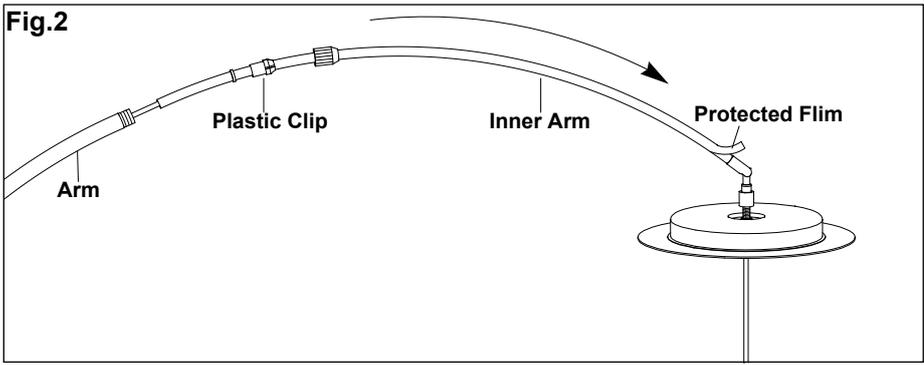


4. Pull the inner arm out from arm completely and another person pull the the fixture wires. Then remove the protected film from the inner arm. (Fig.2)
Note: Hold the plastic clip to prevent inner arm from scuffing .

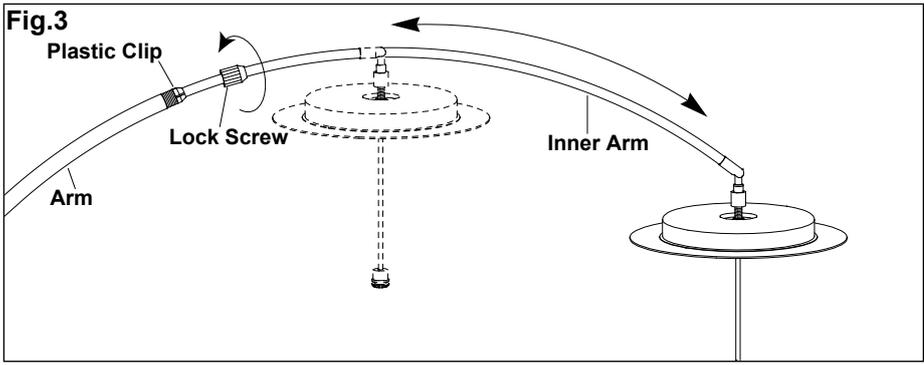


5. Insert the inner arm into the arm and slide the plastic clip back into the arm to prevent the inner arm from scuffing. Place the inner arm to the desired location and tighten lock screw back to arm. (Fig.3)
Note: Hold the inner arm up for succeeding in screwing lock screw and to prevent it from scuffing.
Note: Restore the plastic clip as sooner to prevent inner arm from scuffing.


Installing the Shade and Arcylic Cover and PC Diffuser (Fig.4,5,6,7,8) (K0024 / K0025)

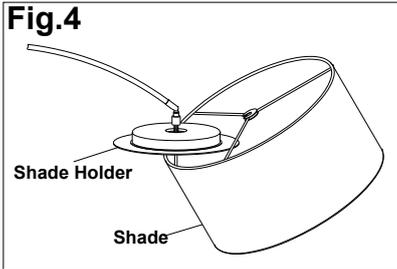


6. Place the shade holder into the shade. (Fig.4)

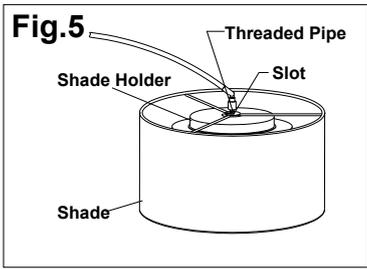


7. Insert the threaded pipe of shade holder into the slot of shade.(Fig5)

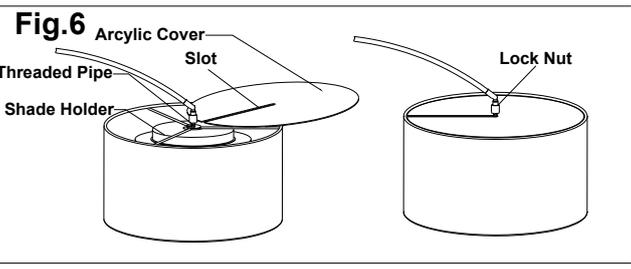

8. Attach the arcylic cover onto the shade and insert the slot of arcylic cover onto the threaded pipe of shade holder. Then place the arcylic cover in place and tighten it with lock nut. (Fig.6)

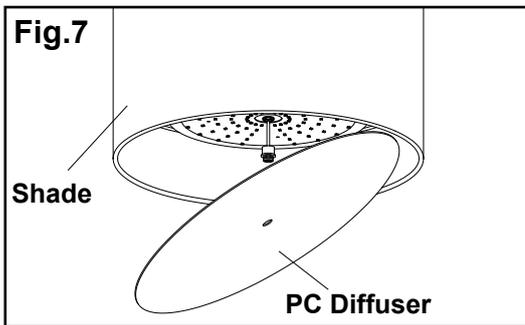



9. Push the pc diffuser into the shade with the oblique angel. (Fig.7)

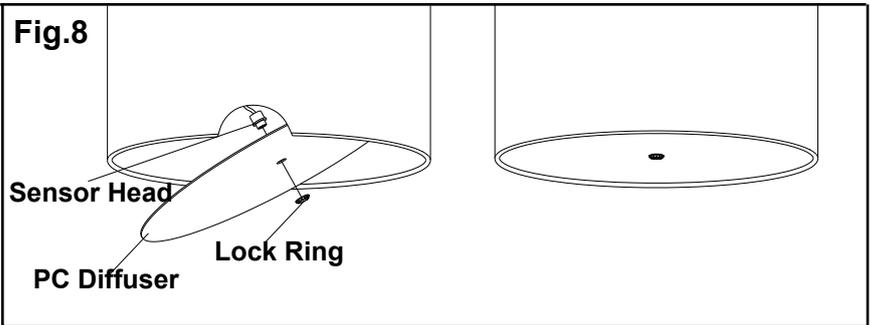


10. Insert the sensor head into the hole of pc diffuser while the half of pc diffuser reaches the shade, then tighten it with lock ring.Push the half of pc diffuser into the shade and place it in place (Fig.).

Note: This portable lamp has a polarized plug (one blade is wider than the other). As a safety feature, this plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Never use with an extension cord unless plug can be fully inserted. Do not attempt to work around this safety feature.

Function and Operation

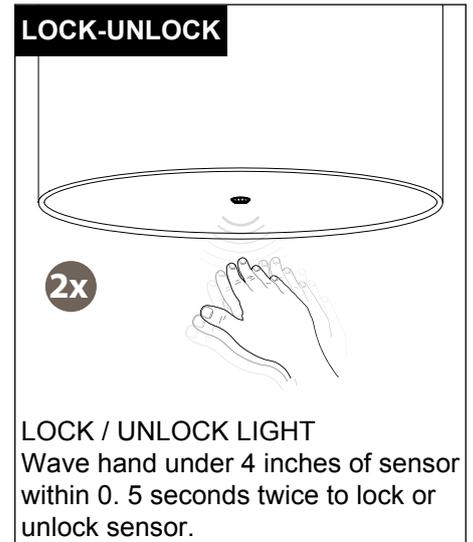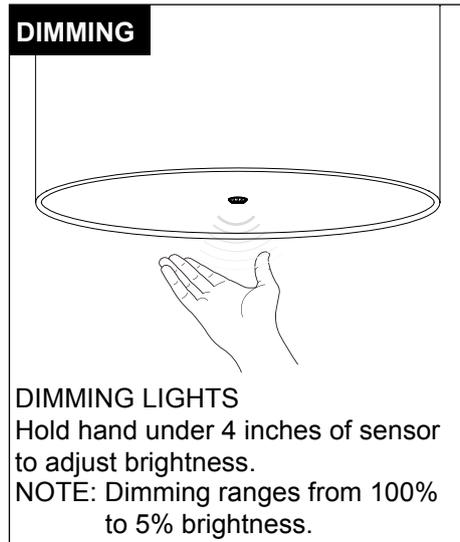

The following parts are available for re-order if damaged or missing.

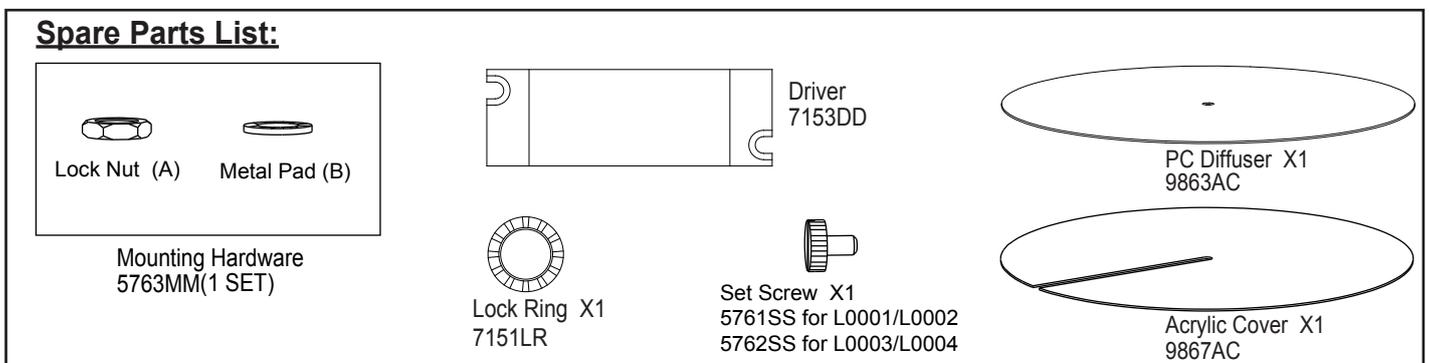

5-YEAR LIMITED WARRANTY:

All products are warranted to be free of defects in material and workmanship for five (5) years from date of purchase. This warranty is limited to the correction of any such defect, or the replacement of any such defective item(s), provided that: (a) we are properly notified and consent to return of the item(s) in question; (b) the item(s) is / are returned with proof of purchase date; and (c) it is found upon inspection by us that the item(s) is / are defective as noted above. This warranty does not cover labor costs, consequential damages, nor does it apply to any item(s) that have been improperly installed, overloaded, altered, or otherwise abused by the customer, its agent(s) or employee(s). Finishes are specially excluded from the terms of this warranty since they are subject to environmental maintenance deemed beyond our control. Other than the described obligation, we assume no further liability with respect to the sale or use of our products. We make no warranty, express or implied, and disclaim any warranty of merchantability or fitness for a particular purpose.

