



## Instructions for electrician STEPS 2 - 21

### WARNING:

2




Electrical Danger




Turn Power Off

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.

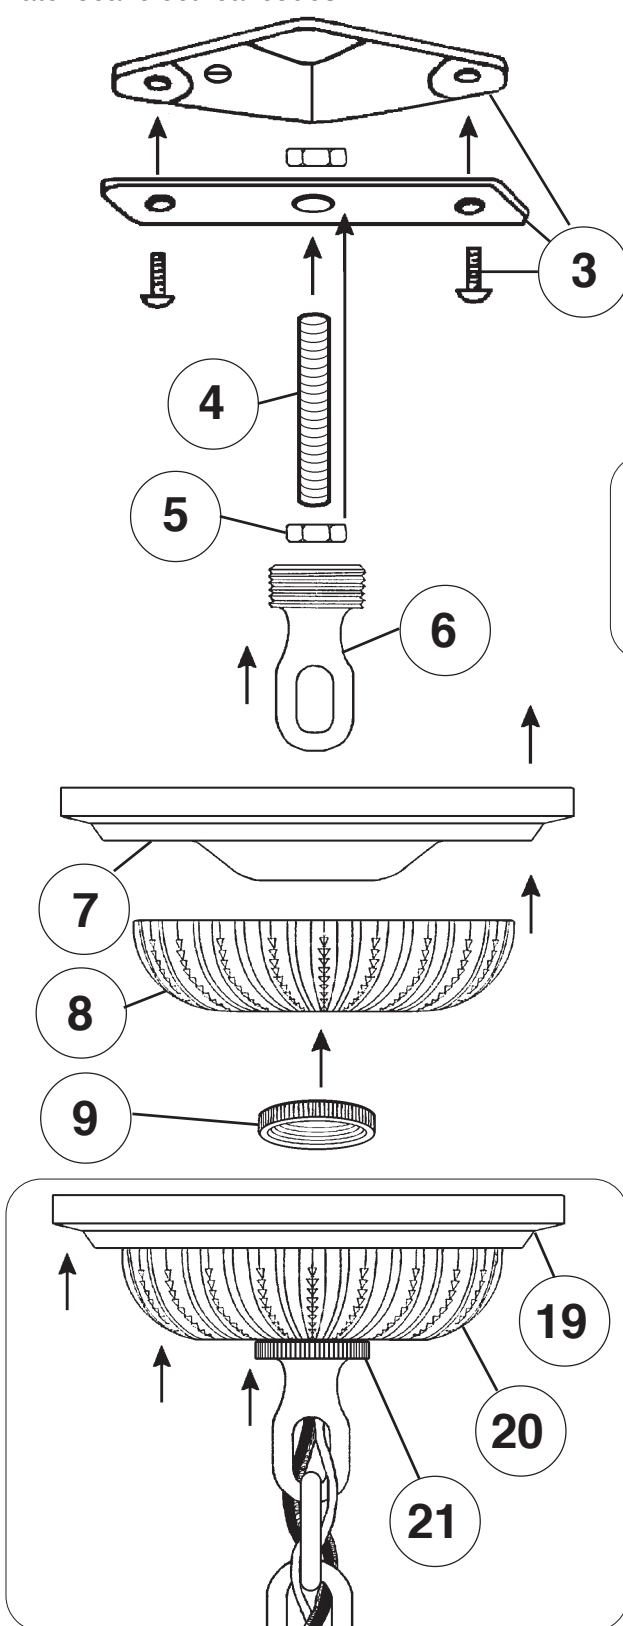


**MAKE SURE THE LOOSE GALLERY RING IS INSTALLED (SLIDE DOWN OVER CENTER COLUMN!) BEFORE CONNECTING FIXTURE WITH CONNECTING LINKS!!**

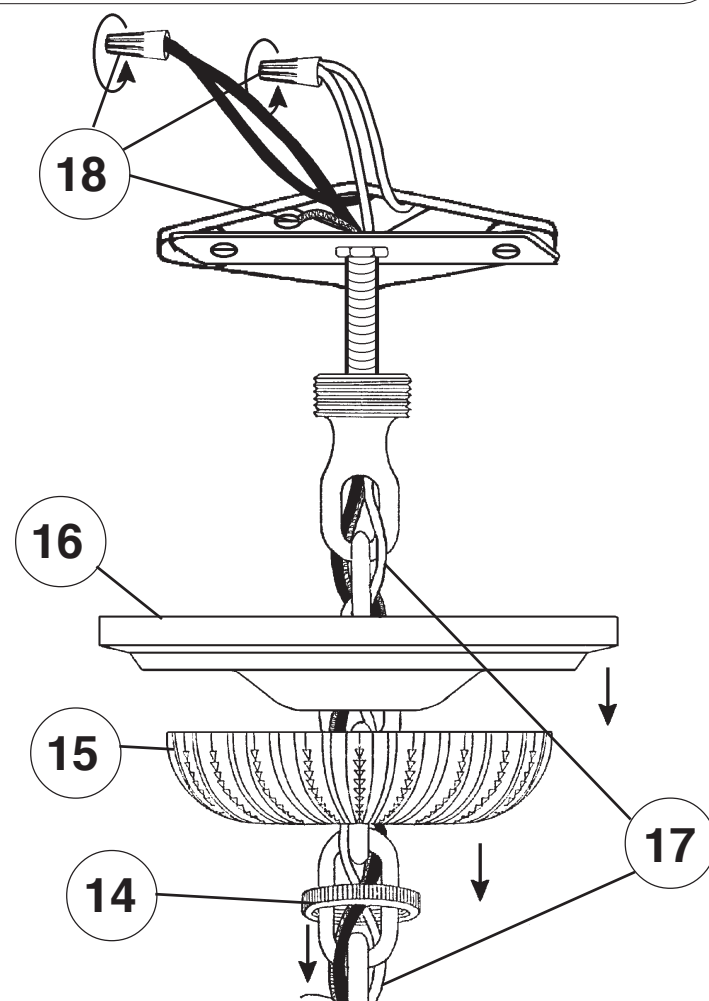

## CHANDELIER 6616- \_\_\_\_\_ A TRIM DIAGRAM

(Finish Option)

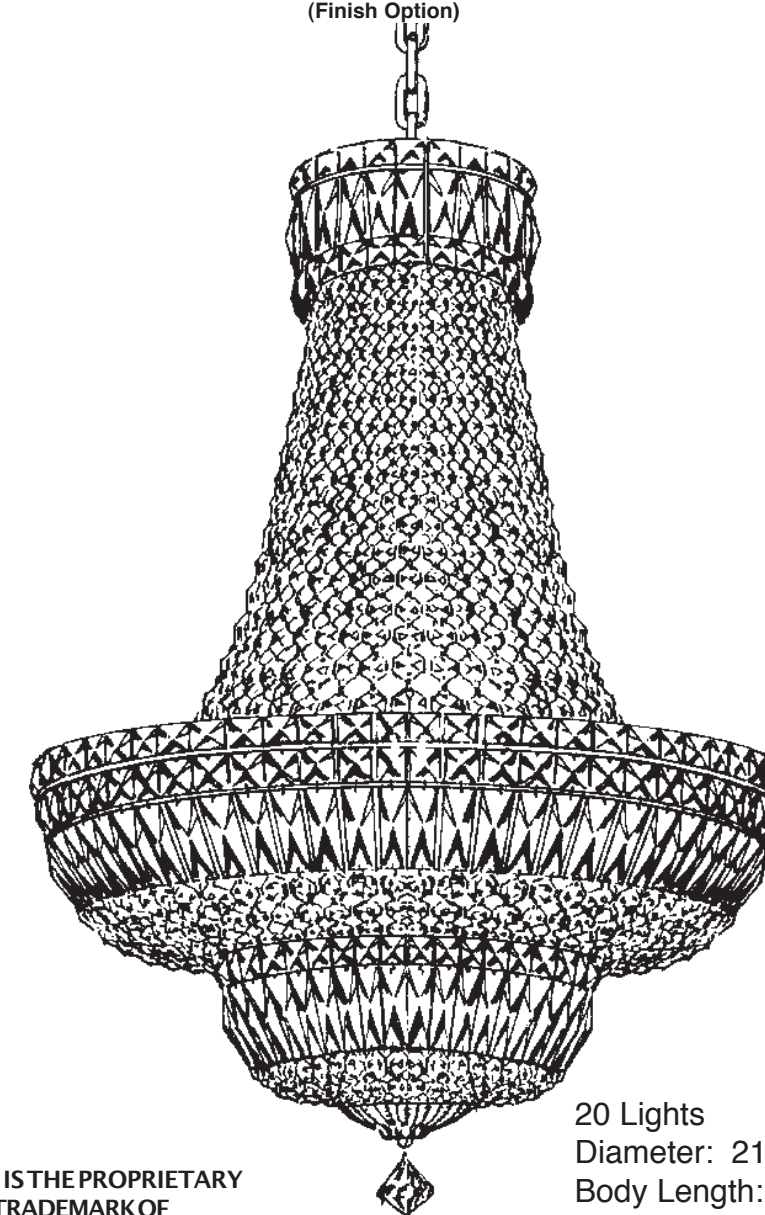

**T** HIS DESIGN IS THE PROPRIETARY TRADE DRESS/TRADE MARK OF SCHONBEK WORLDWIDE LIGHTING INC.

20 Lights  
Diameter: 21"  
Body Length: 31"  
Hanging Weight: 20 pounds

# SCHONBEK®

See diagram on back page  
Follow steps in exact order  
Save this trim diagram for future reference

1

### IMPORTANT


*Person who opens carton should record the following information for future service.*

CODE # \_\_\_\_\_ Four-digit number on outside of carton.  
PACKER # \_\_\_\_\_ See crystal package label.  
ORDER # \_\_\_\_\_ See crystal package label.


SCHONBEK IS A WORLD LEADER IN CHANDELIER DESIGN. PATENTS INCLUDE:  
#D5,144,541

Instructions for crystal trimming  
STEPS 22 - 28

22



You will need 16 - B10  
25 Watts Recommended  
60 Watts Max



You will need 4 - G16-1/2  
25 Watts Recommended  
60 Watts Max


Install bulbs and be sure  
to test fixture BEFORE  
trimming.

LOOSE  
GALLERY  
RING

MAKE SURE THE LOOSE  
GALLERY RING IS  
INSTALLED (SLIDE DOWN  
OVER CENTER COLUMN!)  
BEFORE CONNECTING  
FIXTURE WITH CONNECTING  
LINKS!!


**23** Hook Chains "A" into the top inside ring pin holes. Hook the other end into the loose gallery ring inside pin holes. NOTE: Small jewels on upper end with metal connectors facing outwards.

**24** Slide Chains "B" (FLIP EVERY OTHER ONE) into the slots of the top gallery ring. NOTE: Hold onto the square stone and turn chain side ways, this will allow connector to pass through slot in metal ring. Turn square stone to face the outside of the fixture and lower it until it seats itself in the ring.




**25** Hook the finial into the bottom of the frame.

**26** Hook Chains "C" into the middle gallery ring #4. NOTE: Hold onto the square stone and turn chain side ways, this will allow connector to pass through slot in metal ring. Turn square stone to face the outside of the fixture and lower it until it seats itself in the ring. Hook the other end into the outside pin holes of ring #5.



**27** Hook Chains "D" into the middle gallery ring #6. NOTE: Hold onto the square stone and turn chain side ways, this will allow connector to pass through slot in metal ring. Turn square stone to face the outside of the fixture and lower it until it seats itself in the ring. Hook the other end into the pin holes of the finial.



**28** Hook Ball "E" into the knob located at the bottom of the finial.

