



DLHA500 JACK

50W halogen lamp

Use as a display light, easel light or desk lamp.

50W MR16 halogen bulb included. Extends 24" (61cm).

WARNING

SCREW "A" MUST ALWAYS BE SNUG.

FAILURE TO DO SO WILL CAUSE ARCING
AND BURN OUT THE SOCKET.

DO NOT CROSS ANTENNAS!

THIS WILL CAUSE THE TRANSFORMER
TO BURN OUT!


**FAILURE TO FOLLOW THESE
INSTRUCTIONS WILL VOID WARRANTY**



WARNING

The pins that connect the antenna to the
transformer are fragile !
They will break if forced.

**Pin breakage is not covered under
warranty !**

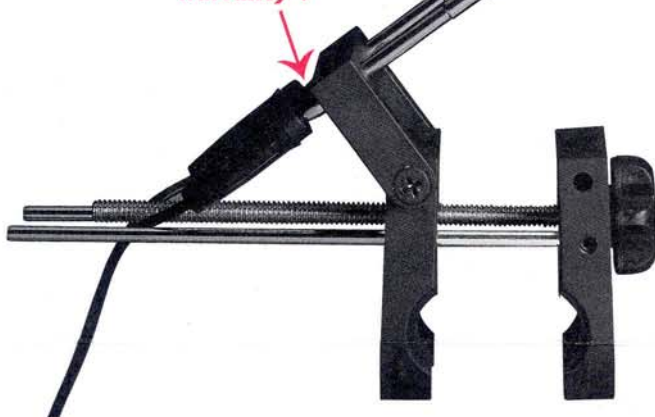


To install or remove screw "A", the set screw "C" must be loosened
(allen key not provided). Screw "A" will not loosen or tighten without
first loosening set screw "C". If you try to tighten screw "A" without
loosening set screw "C" you will break arm "F" from base of socket "G".
Breakage of arm "F" is not covered under warranty.


Screw "A" must be tightened firmly on both sides. Once this is done,
tighten set screw "C". This locks-down screw "A" and will not allow it to
loosen easily. Be sure lock washer "B" is in the proper position before
tightening screw "A". If the socket (when bulb is installed) will not hold
the position it is rotated to, screws "A" are not tight enough.

BULB INSTALLATION

Use only EXN-CG
type 50W max.,
c/w covered glass.
Screws "D"
holding bulb pins
must be loosened
to remove bulb &
then tightened.
Do not remove or
replace bulb
without loosening
these screws.

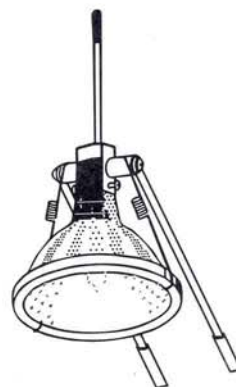

DLHA500 Socket assembly

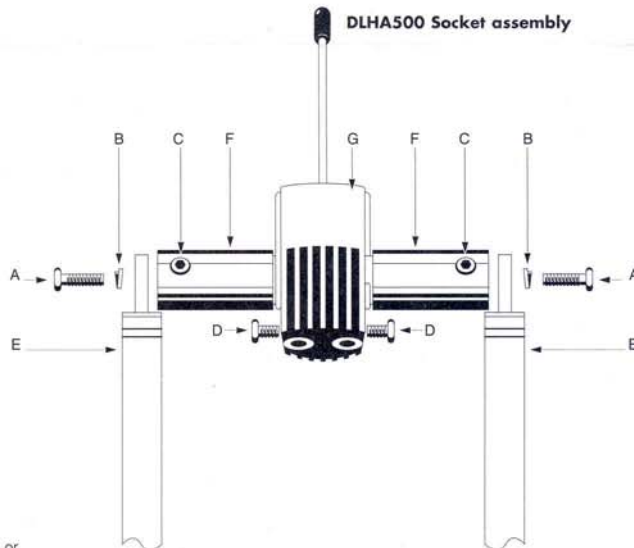

Guarantee:

All Dainolite Ltd. products, properly installed and under normal conditions of use, are guaranteed against faulty workmanship or
mechanical defect for one year from date of delivery. Responsibility is limited to repair or replacement of defective parts only.
Bulbs, whether purchased separately or included in a lamp, are not covered under warranty unless returned within 15 days of purchase.

1401 Courtneypark Dr. E Mississauga, Ontario, Canada L5T 2E4

Tel. (905) 564-1262 Fax. (905) 564-1299

E-Mail: dainolite@dainolite.ca

Web: www.dainolite.ca

May 30, 2007

DLHA500 "JACK" SERIES

DLHA500

50W MR16 halogen display light (bulb incl.)
Adjustable arms to 24" (61cm)
Clamp designed for board or pipe mounting, maximum opening to 4.25" (11cm)
Cord length 12' (366 cm) with rotary in-line switch 36" (91 cm) from fixture.
Electrical requirement 120V 60HZ.
UL, CUL, NRTL/C approved.

DLHA500UK

DLHA500EU

DLHA500ZA


Same fixture specifications as above except for electrical requirements.
Designed for use in United Kingdom, 240V 50HZ.
EMC, GS, CE approved.

Same fixture specifications as above except for electrical requirements.
Designed for use in most European countries. 230V 50HZ.
EMC, GS, CE approved.


Same fixture specifications as above except for electrical requirements.
Designed for use in New Zealand and Australia. 240V 50HZ.
EMC, GS, CE approved.



Custom Mounting Brackets:

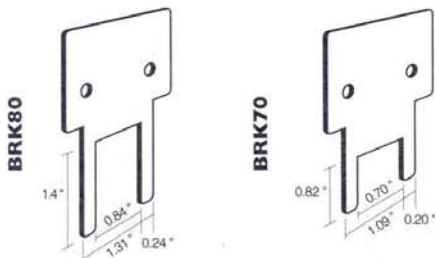

DMBC500

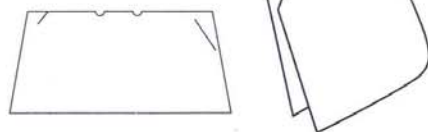

EXN-CG



DMTR500-3



DMPI60 BLK



DLHA500 "JACK" ACCESSORIES

Easy mount brackets.
Bracket designed to fit into display hardware.
BRK70 - .70" opening
BRK80 - .84" opening
Custom brackets also available - please provide specifications.

Lexan plastic KD shade for use with any Jack model.
Can also be used to cover any MR16 bulb.
Available in Blue, Green, White, Yellow, Red and Natural.

50W MR16 low voltage bulb complete with covered glass.
38° beam angle. Replacement bulb for DLHA500.

Transformer with built-in adapters to accept three DLHA500 "Jack" complete with 6' (183 cm) SJT cord.
This 3 outlet transformer may be purchased separately or with your initial order of "Jack". When purchasing together with "Jack" a credit will be given for individual plug-in transformers not required.

Replacement transformer for DLHA500 (120V 60Hz).
If cord also required specify DMPI60JK+C.

