

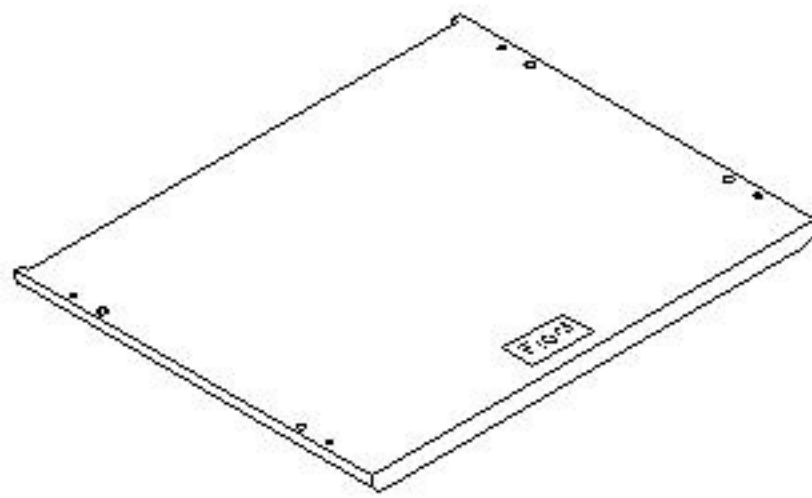
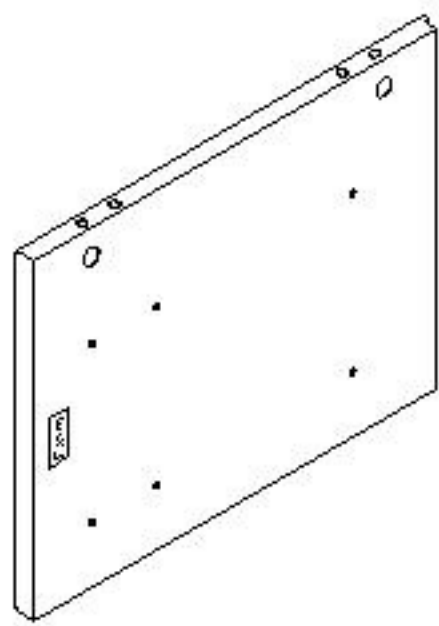
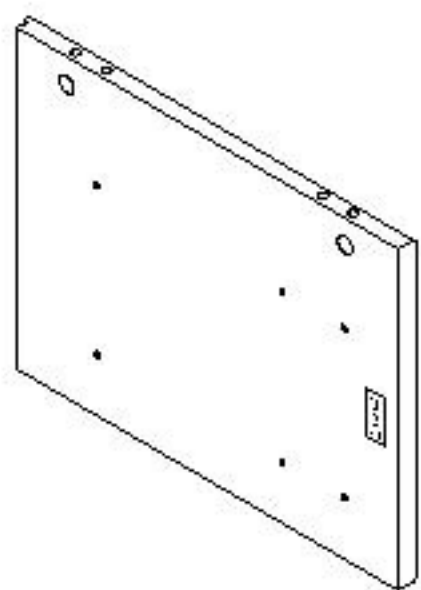
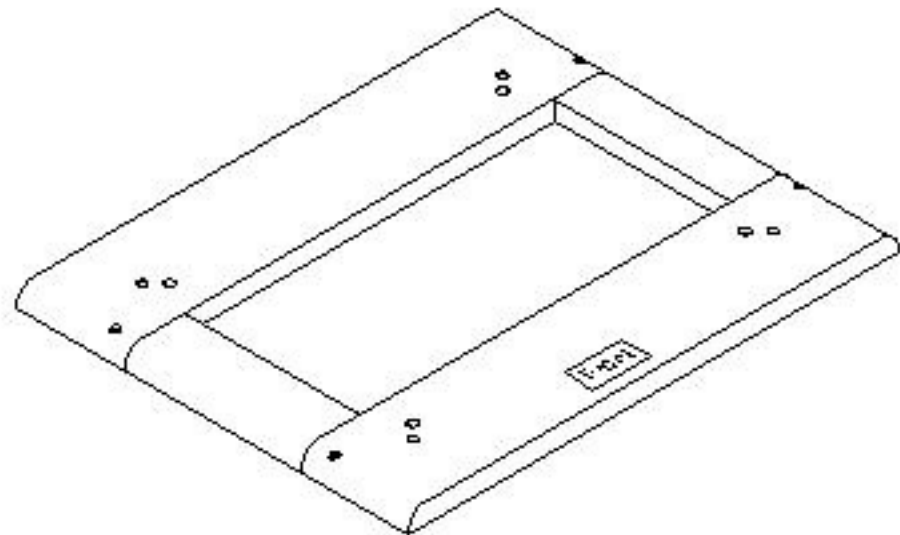
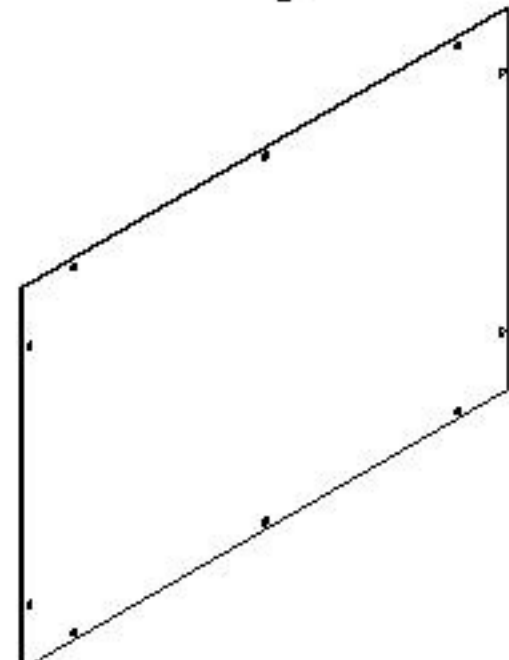
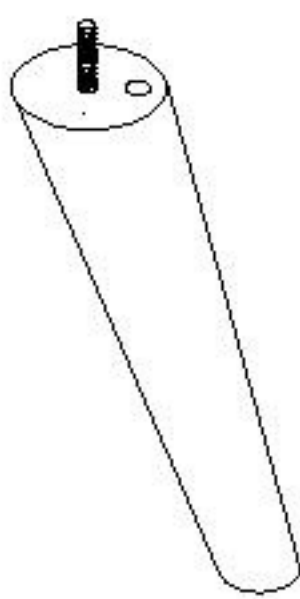
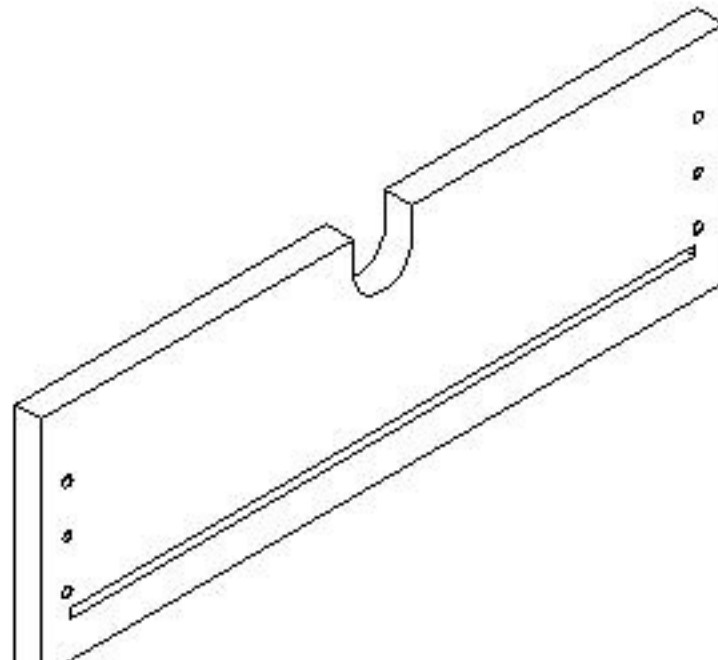
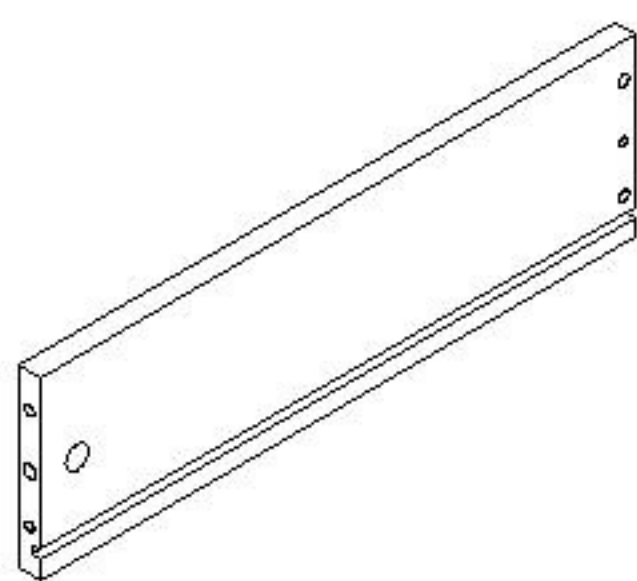
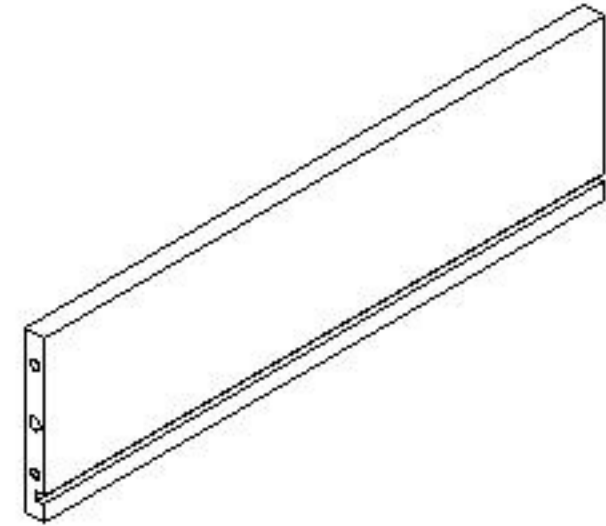
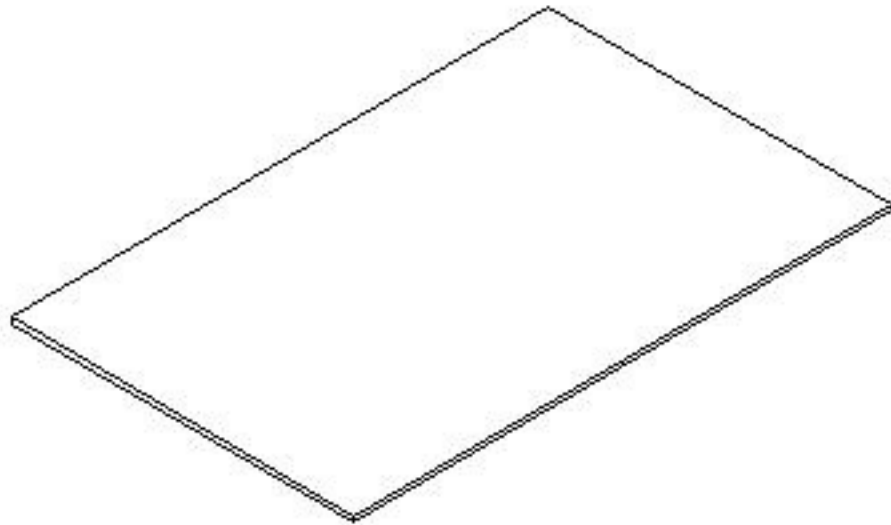
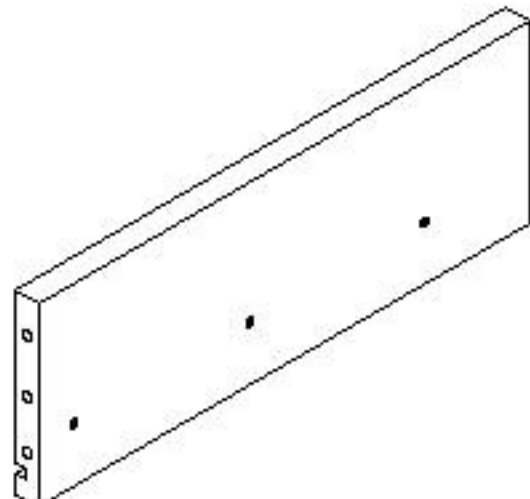
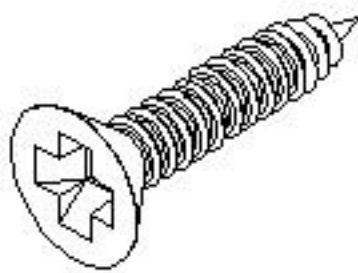
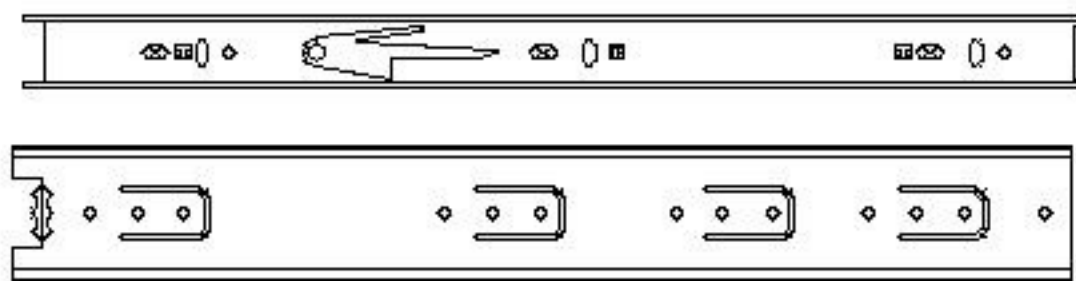
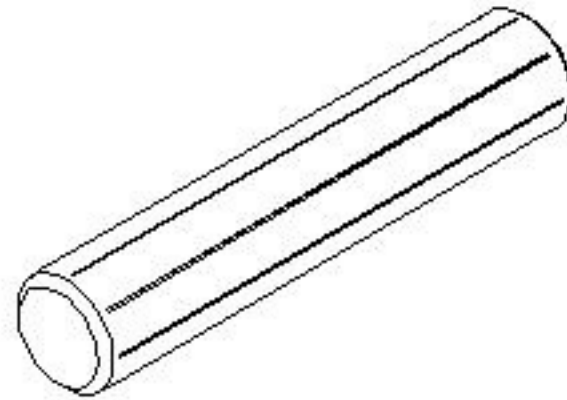
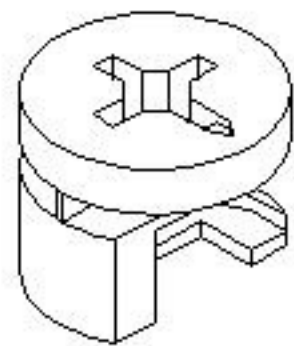
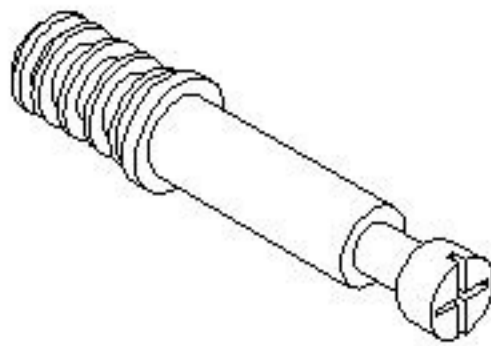
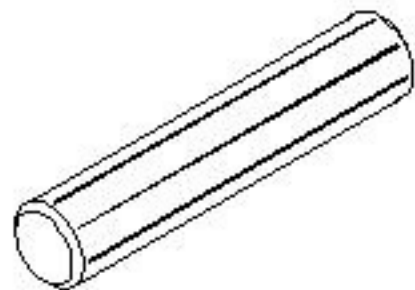
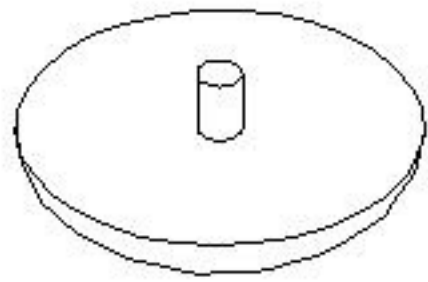
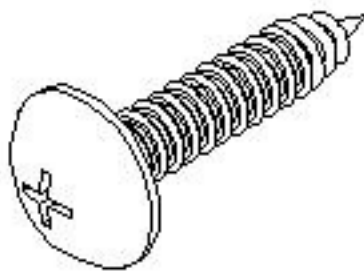
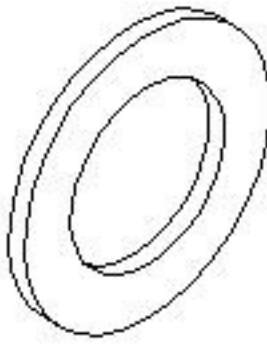
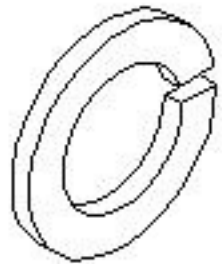
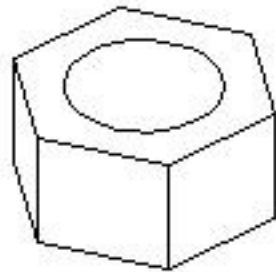
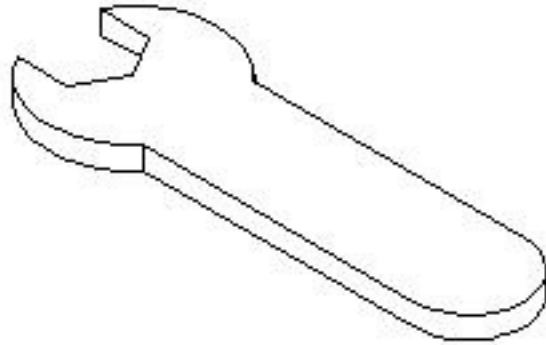


# ASSEMBLY INSTRUCTION

## 2 - DRAWER NIGHTSTAND


<b>A</b> Top Panel	<b>B</b> Left Side Panel	<b>C</b> Right Side Panel	<b>D</b> Bottom Frame
			
1pc	1pc	1pc	1pc
<b>E</b> Back Plywood	<b>F</b> Post	<b>G</b> Drawer Front	<b>H</b> Left Drawer Side
			
1pc	4pcs	2pcs	2pcs
<b>I</b> Drawer Back	<b>J</b> Drawer Base	<b>K</b> Right Drawer Side	<b>L</b> Screw 3*16mm
			
2pcs	2pcs	2pcs	24pcs
<b>M</b> Extension Runner 350mm	<b>N</b> Dowel 8*35mm	<b>O</b> Cam Lock 15*12	<b>P</b> Cam Bolt 5*25
			
2sets	12pcs	12pcs	12pcs
<b>Q</b> Dowel 6*30mm	<b>R</b> Cam Lock Cover 17*5	<b>S</b> Panhead Screw 4*16mm-black	<b>T</b> Flat Washer M8
			
16pcs	12pcs	10pcs	4pcs
<b>U</b> Spring Washer M8	<b>V</b> Hex Nut M8	<b>W</b> Spanner M12.8	<b>X</b> Screw 4*32mm
			
4pcs	4pcs	1pc	4pcs

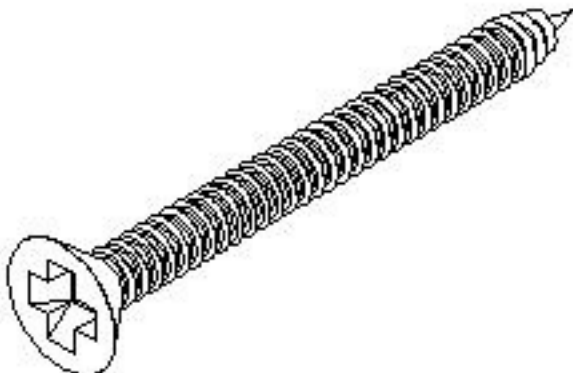

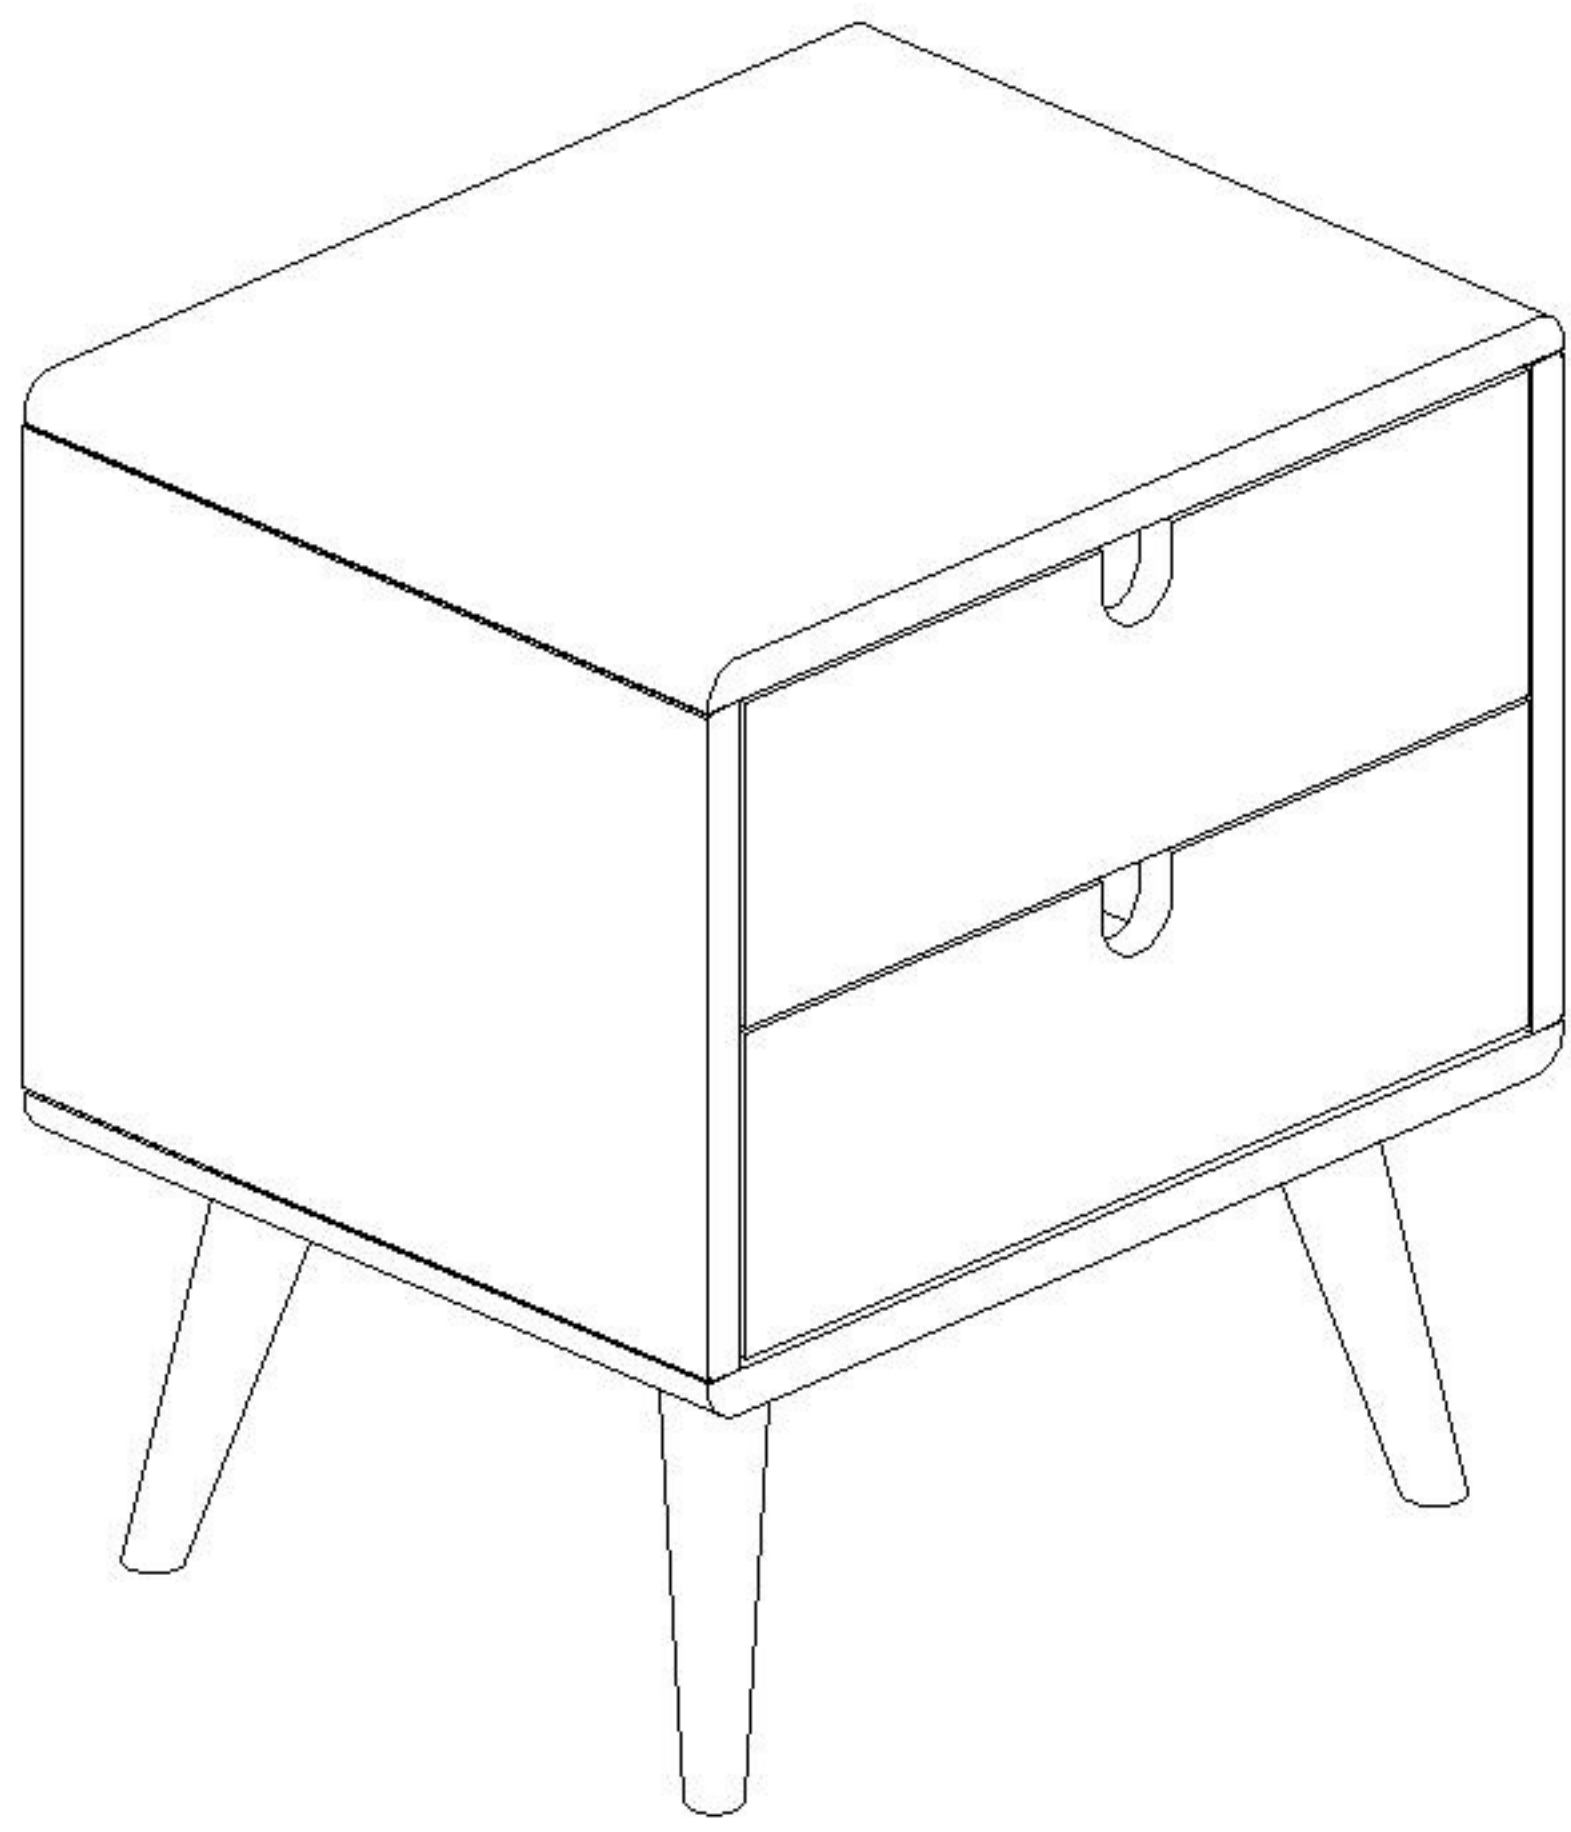


This pages lists all the contents included in the box. Please take the time to identify the hardware as well as the individual components to this product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage.

## 1 Insert and secure Cam Bolt (P) to Top Panel (A).

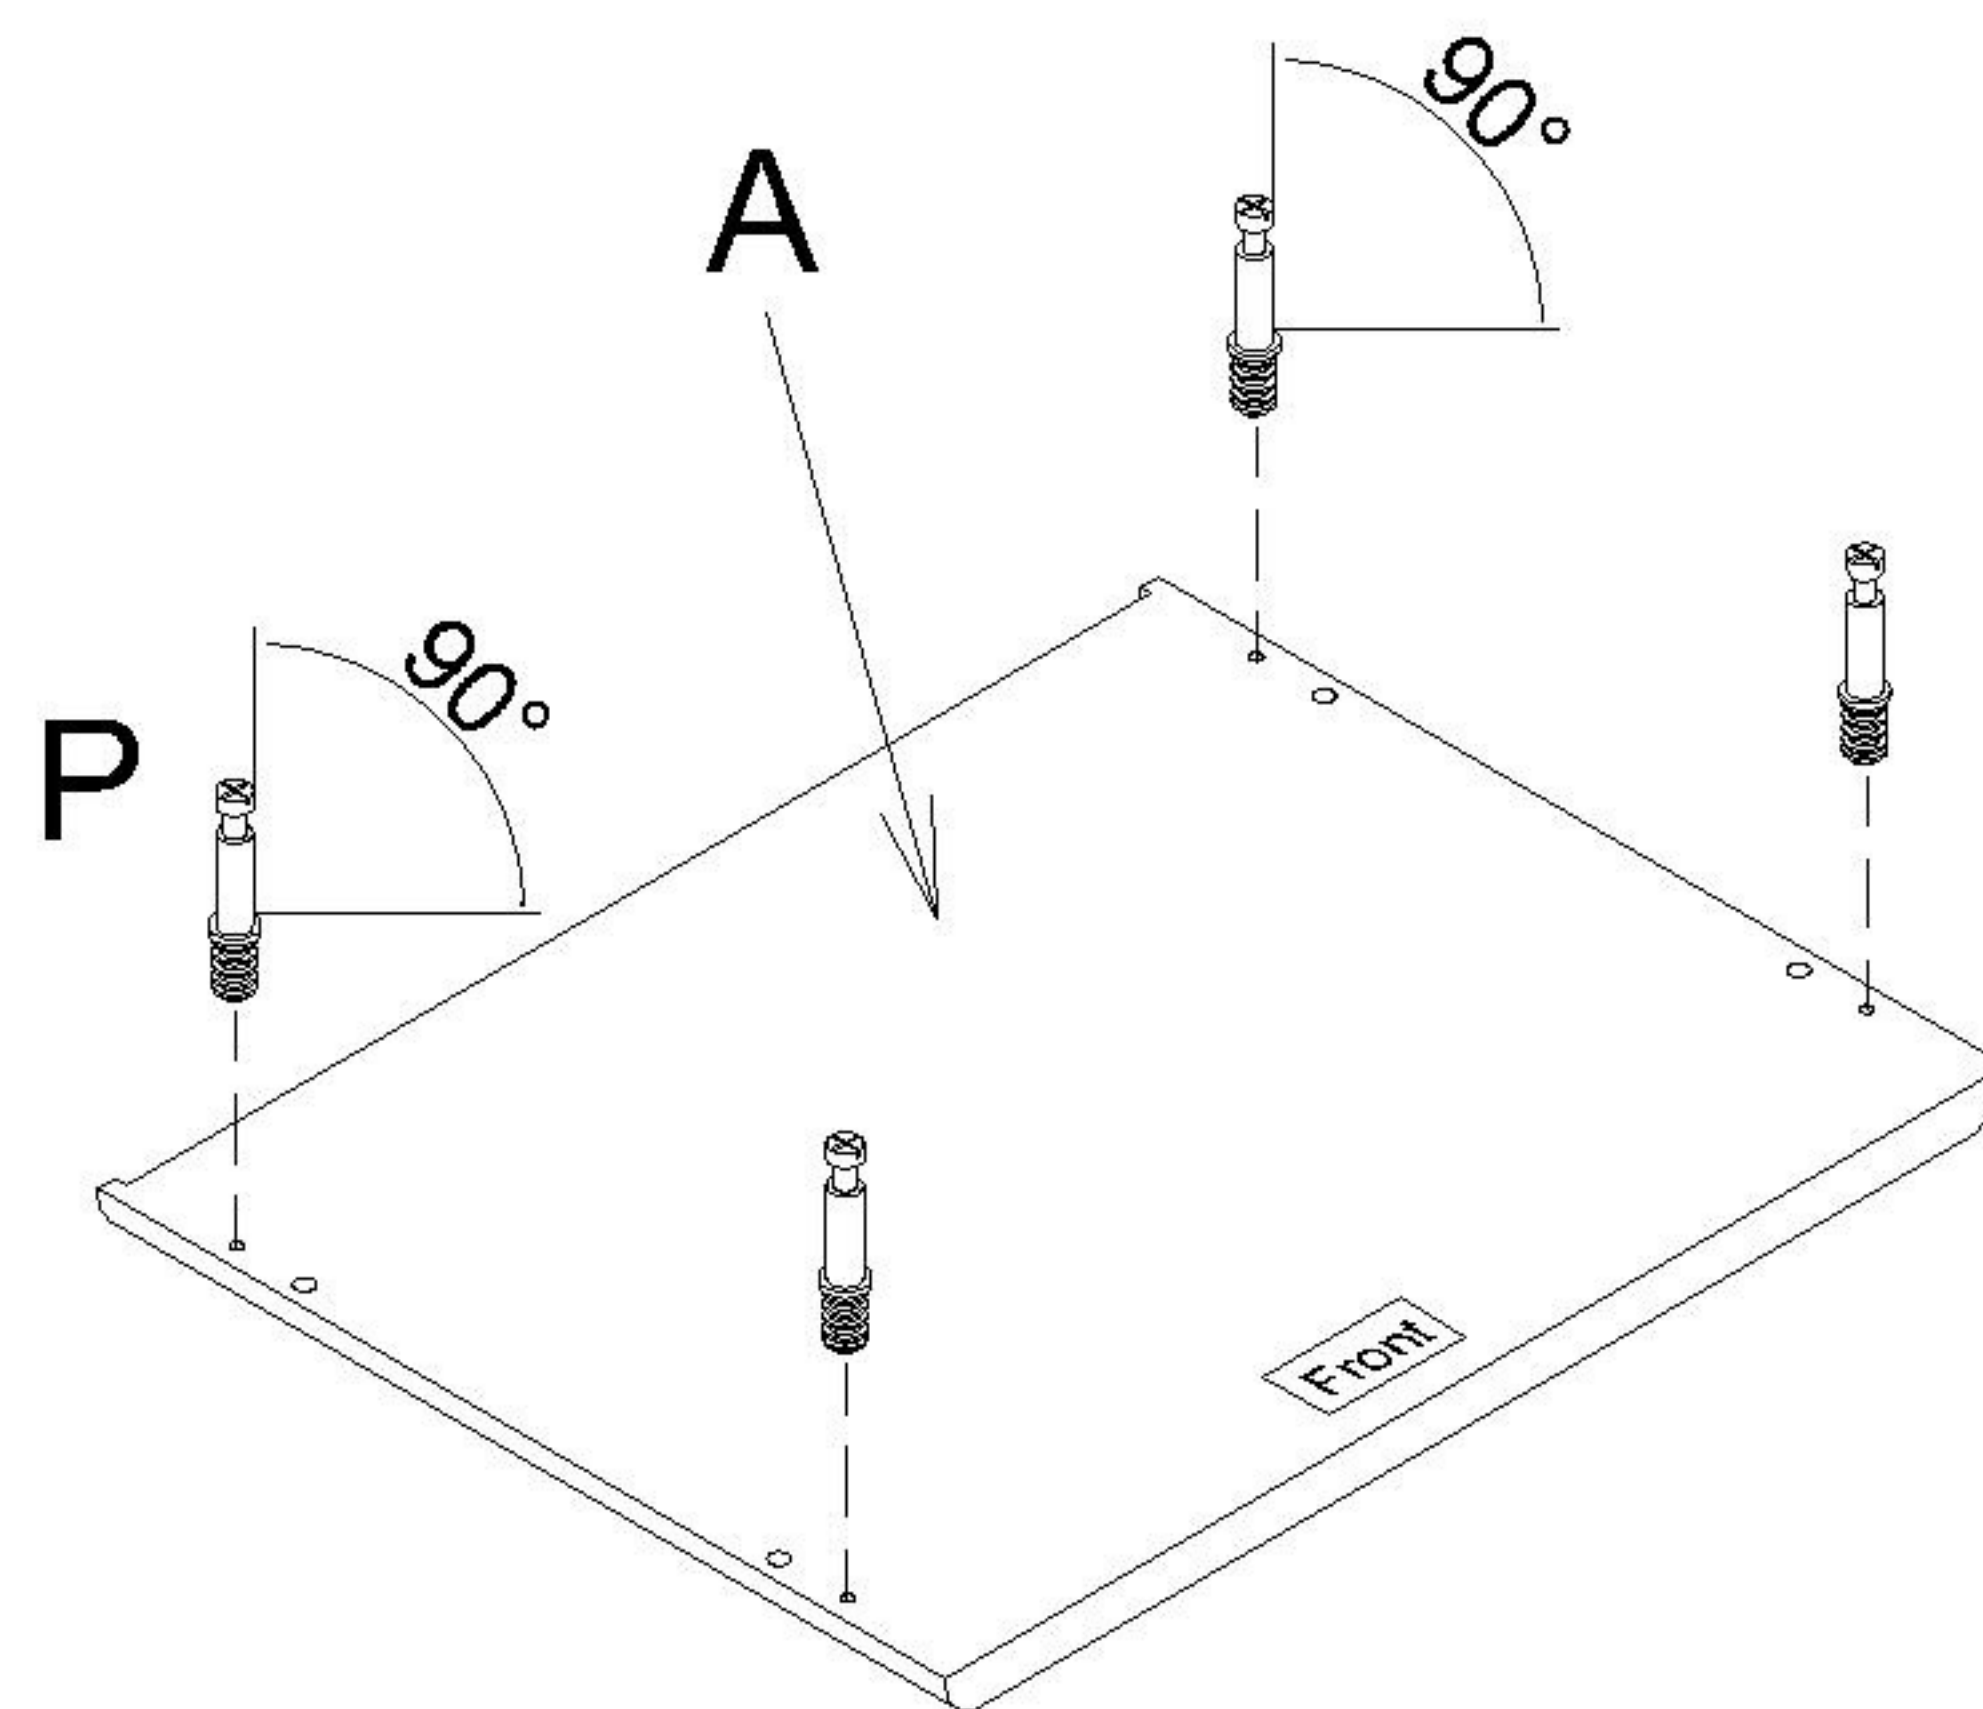

## 2 Insert Dowel (N) to Left & Right Side Panel (B & C). Attach Cam Lock (O) to Left & Right Side Panel (B & C).

NOTE : - Make sure arrows on each Cam Lock points towards nearest edge with holes.


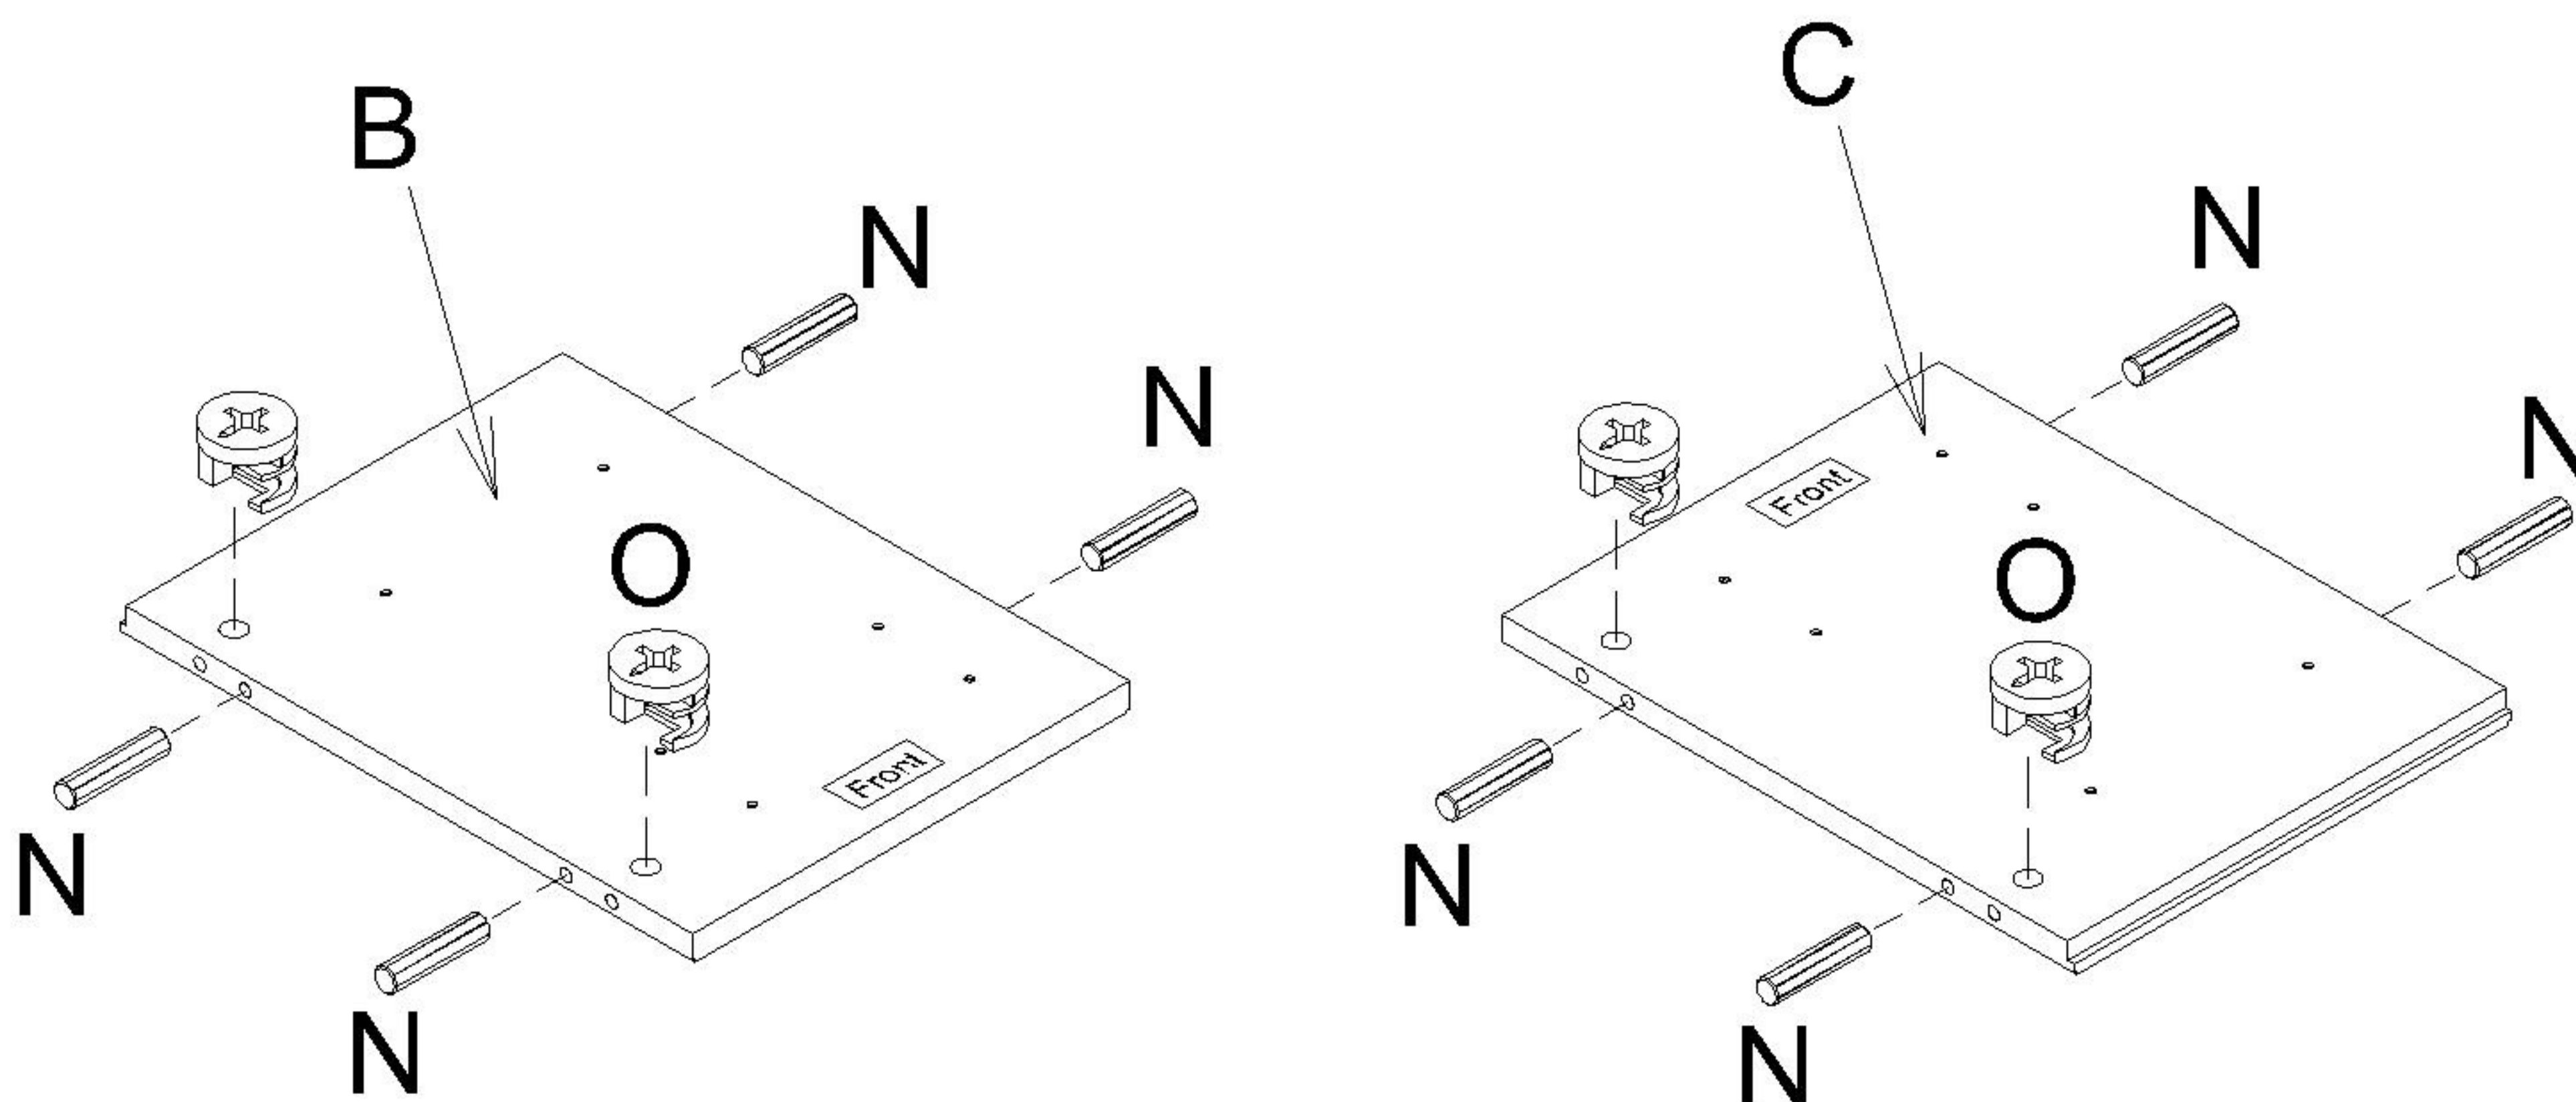


3


Attach Extension Runner (M) to Left & Right Side Panel (B & C) using Screw (L) to secure.

NOTE : - Runner roller should be towards the front of the panel.

- Screw (L) should be assembled from the front of the runner. Start from Q<sup>1</sup>, Q<sup>2</sup> then Q<sup>3</sup>.
- Make sure the screws are installed vertically without slant to ensure screw sits properly in the hole.

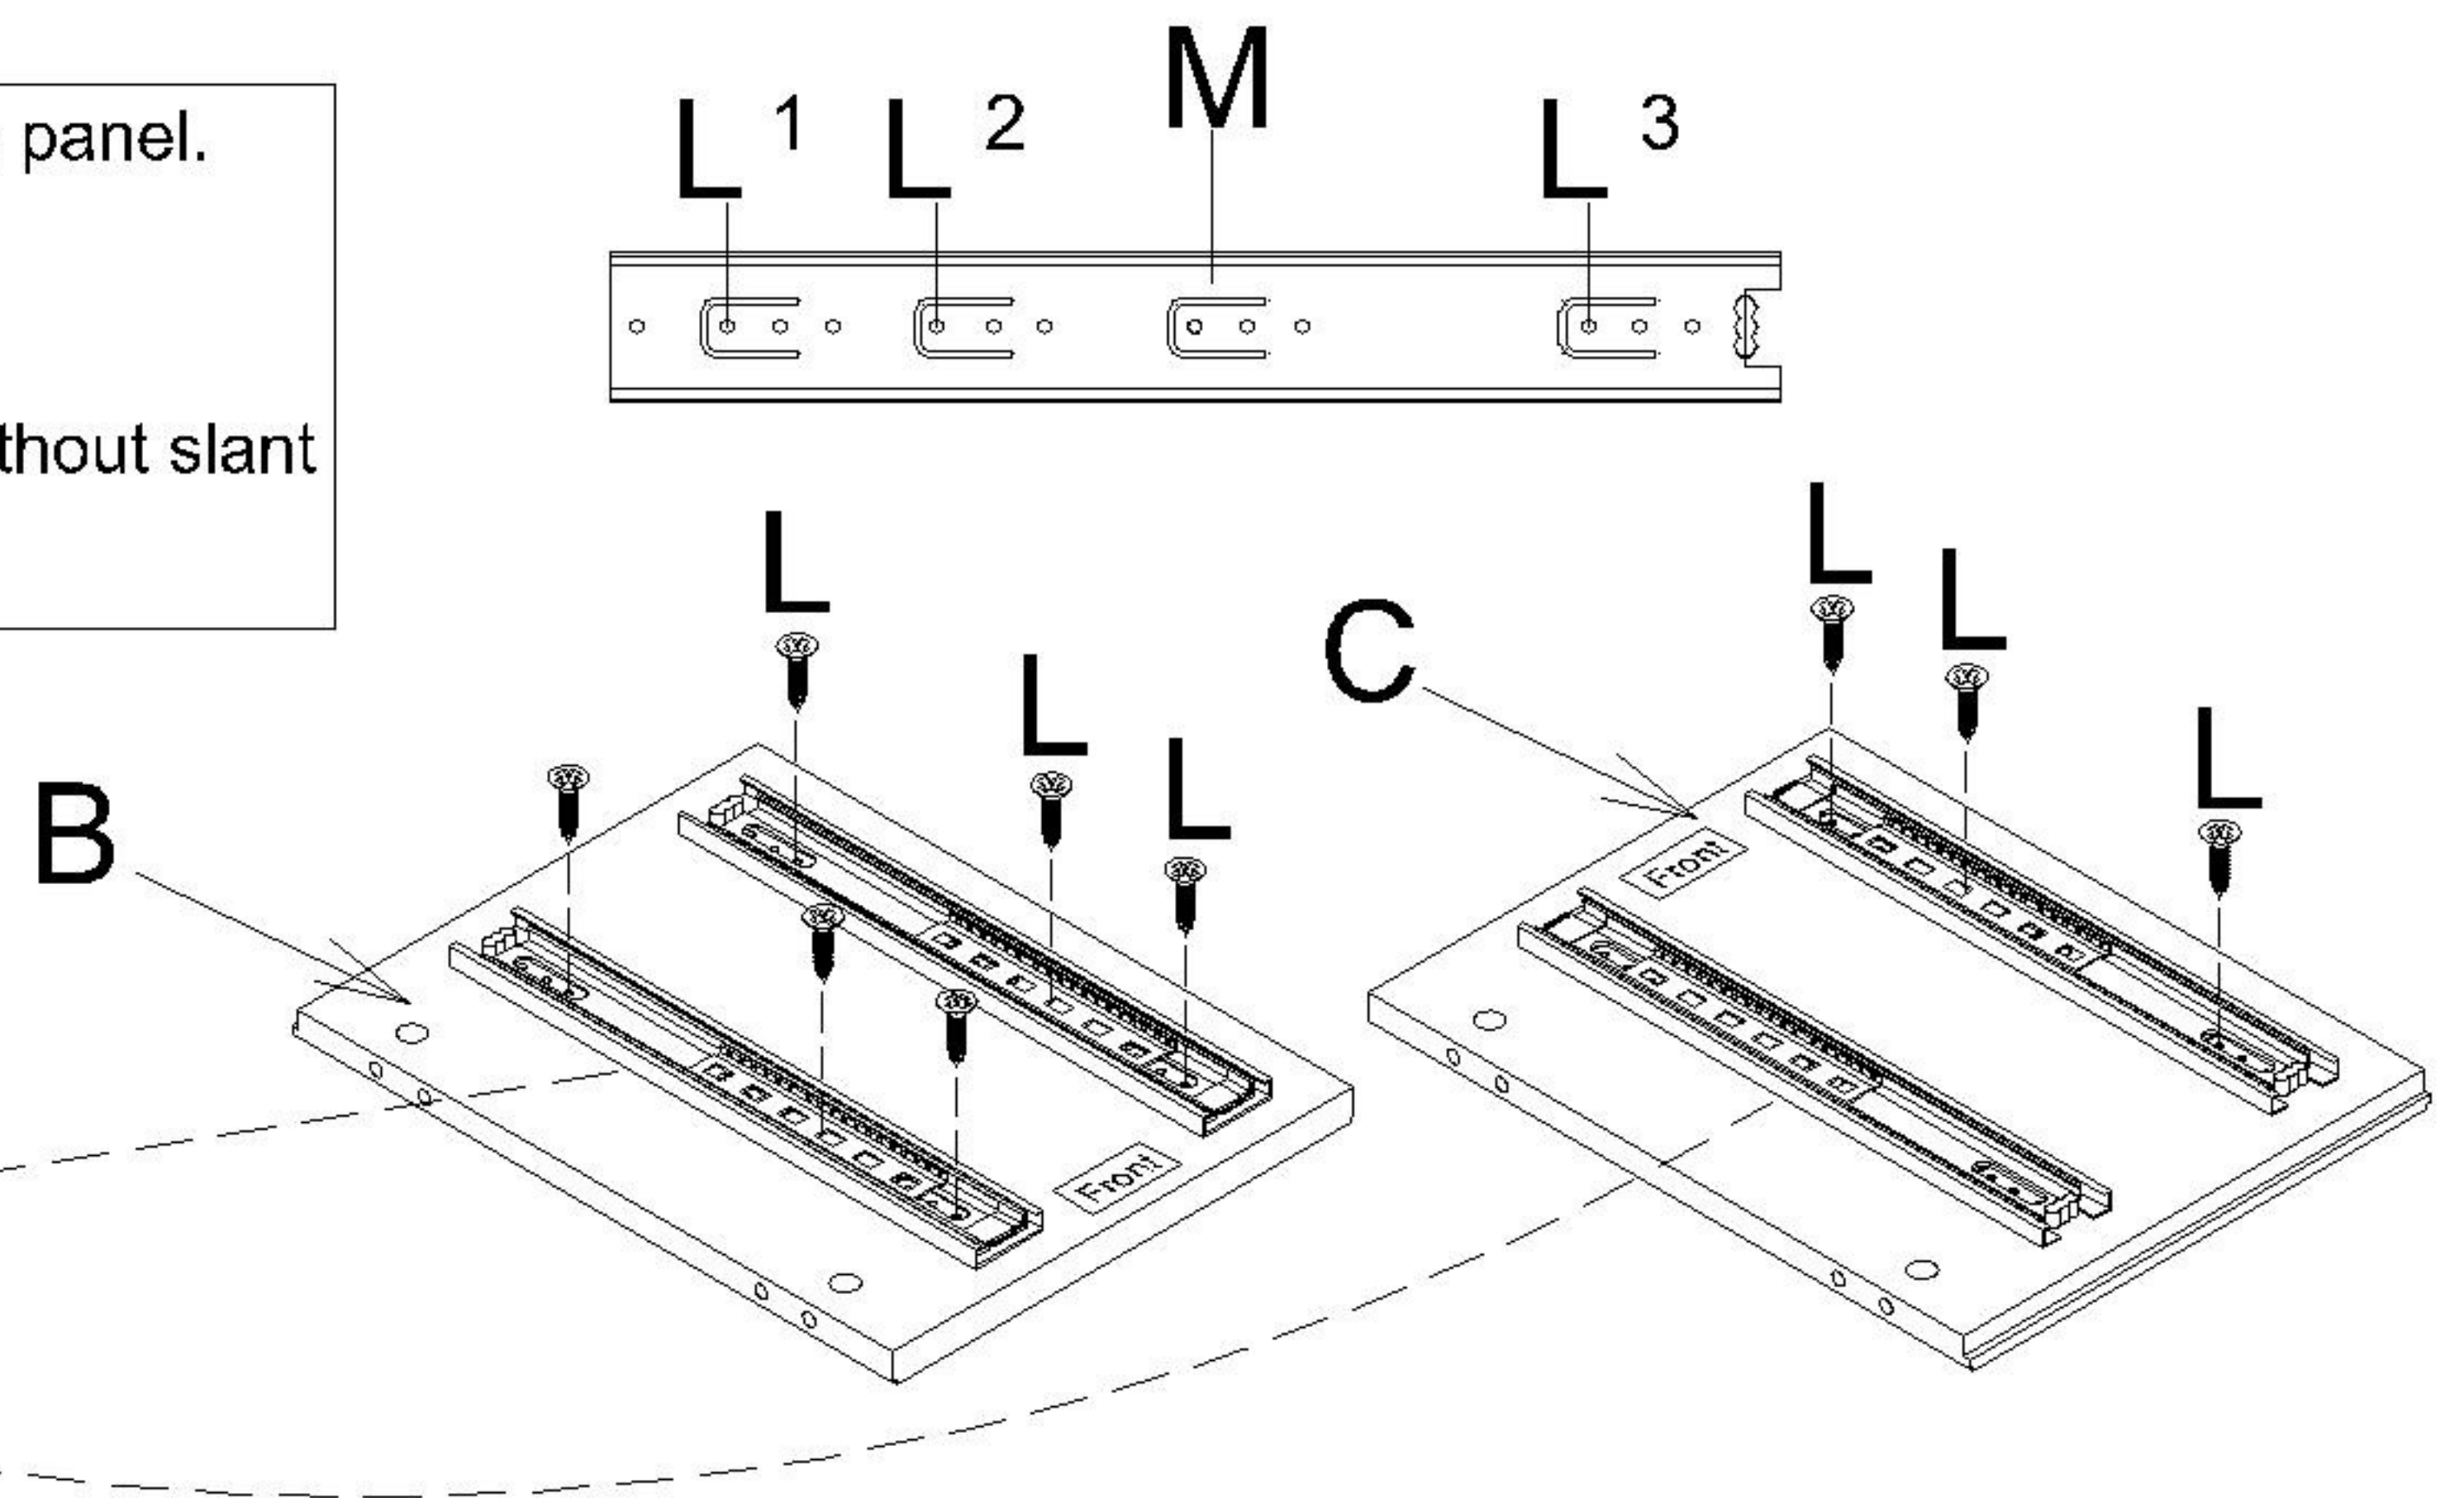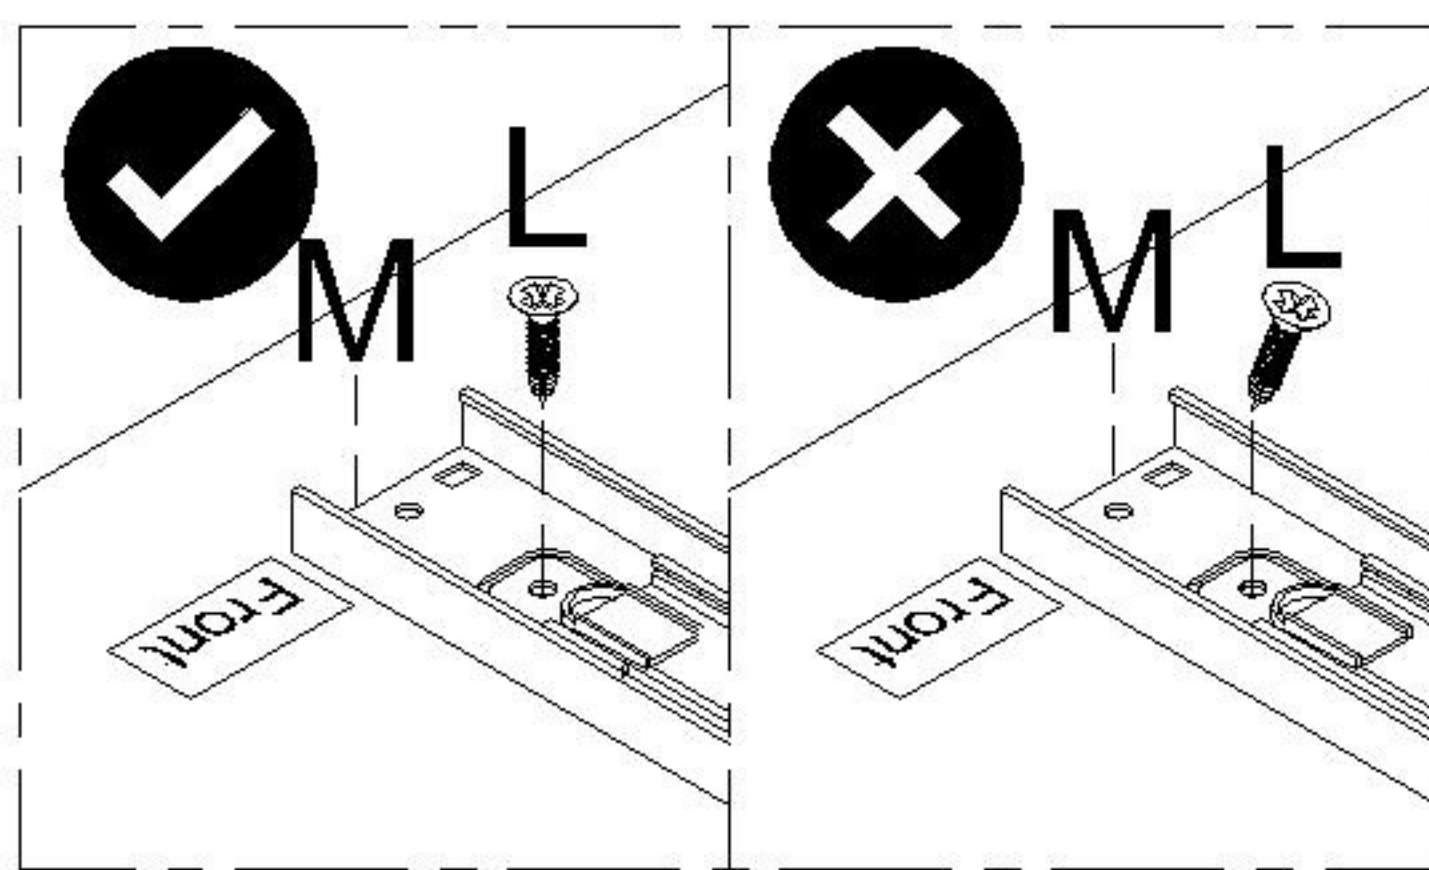


### EXTENSION RUNNER DISASSEMBLE STEPS:

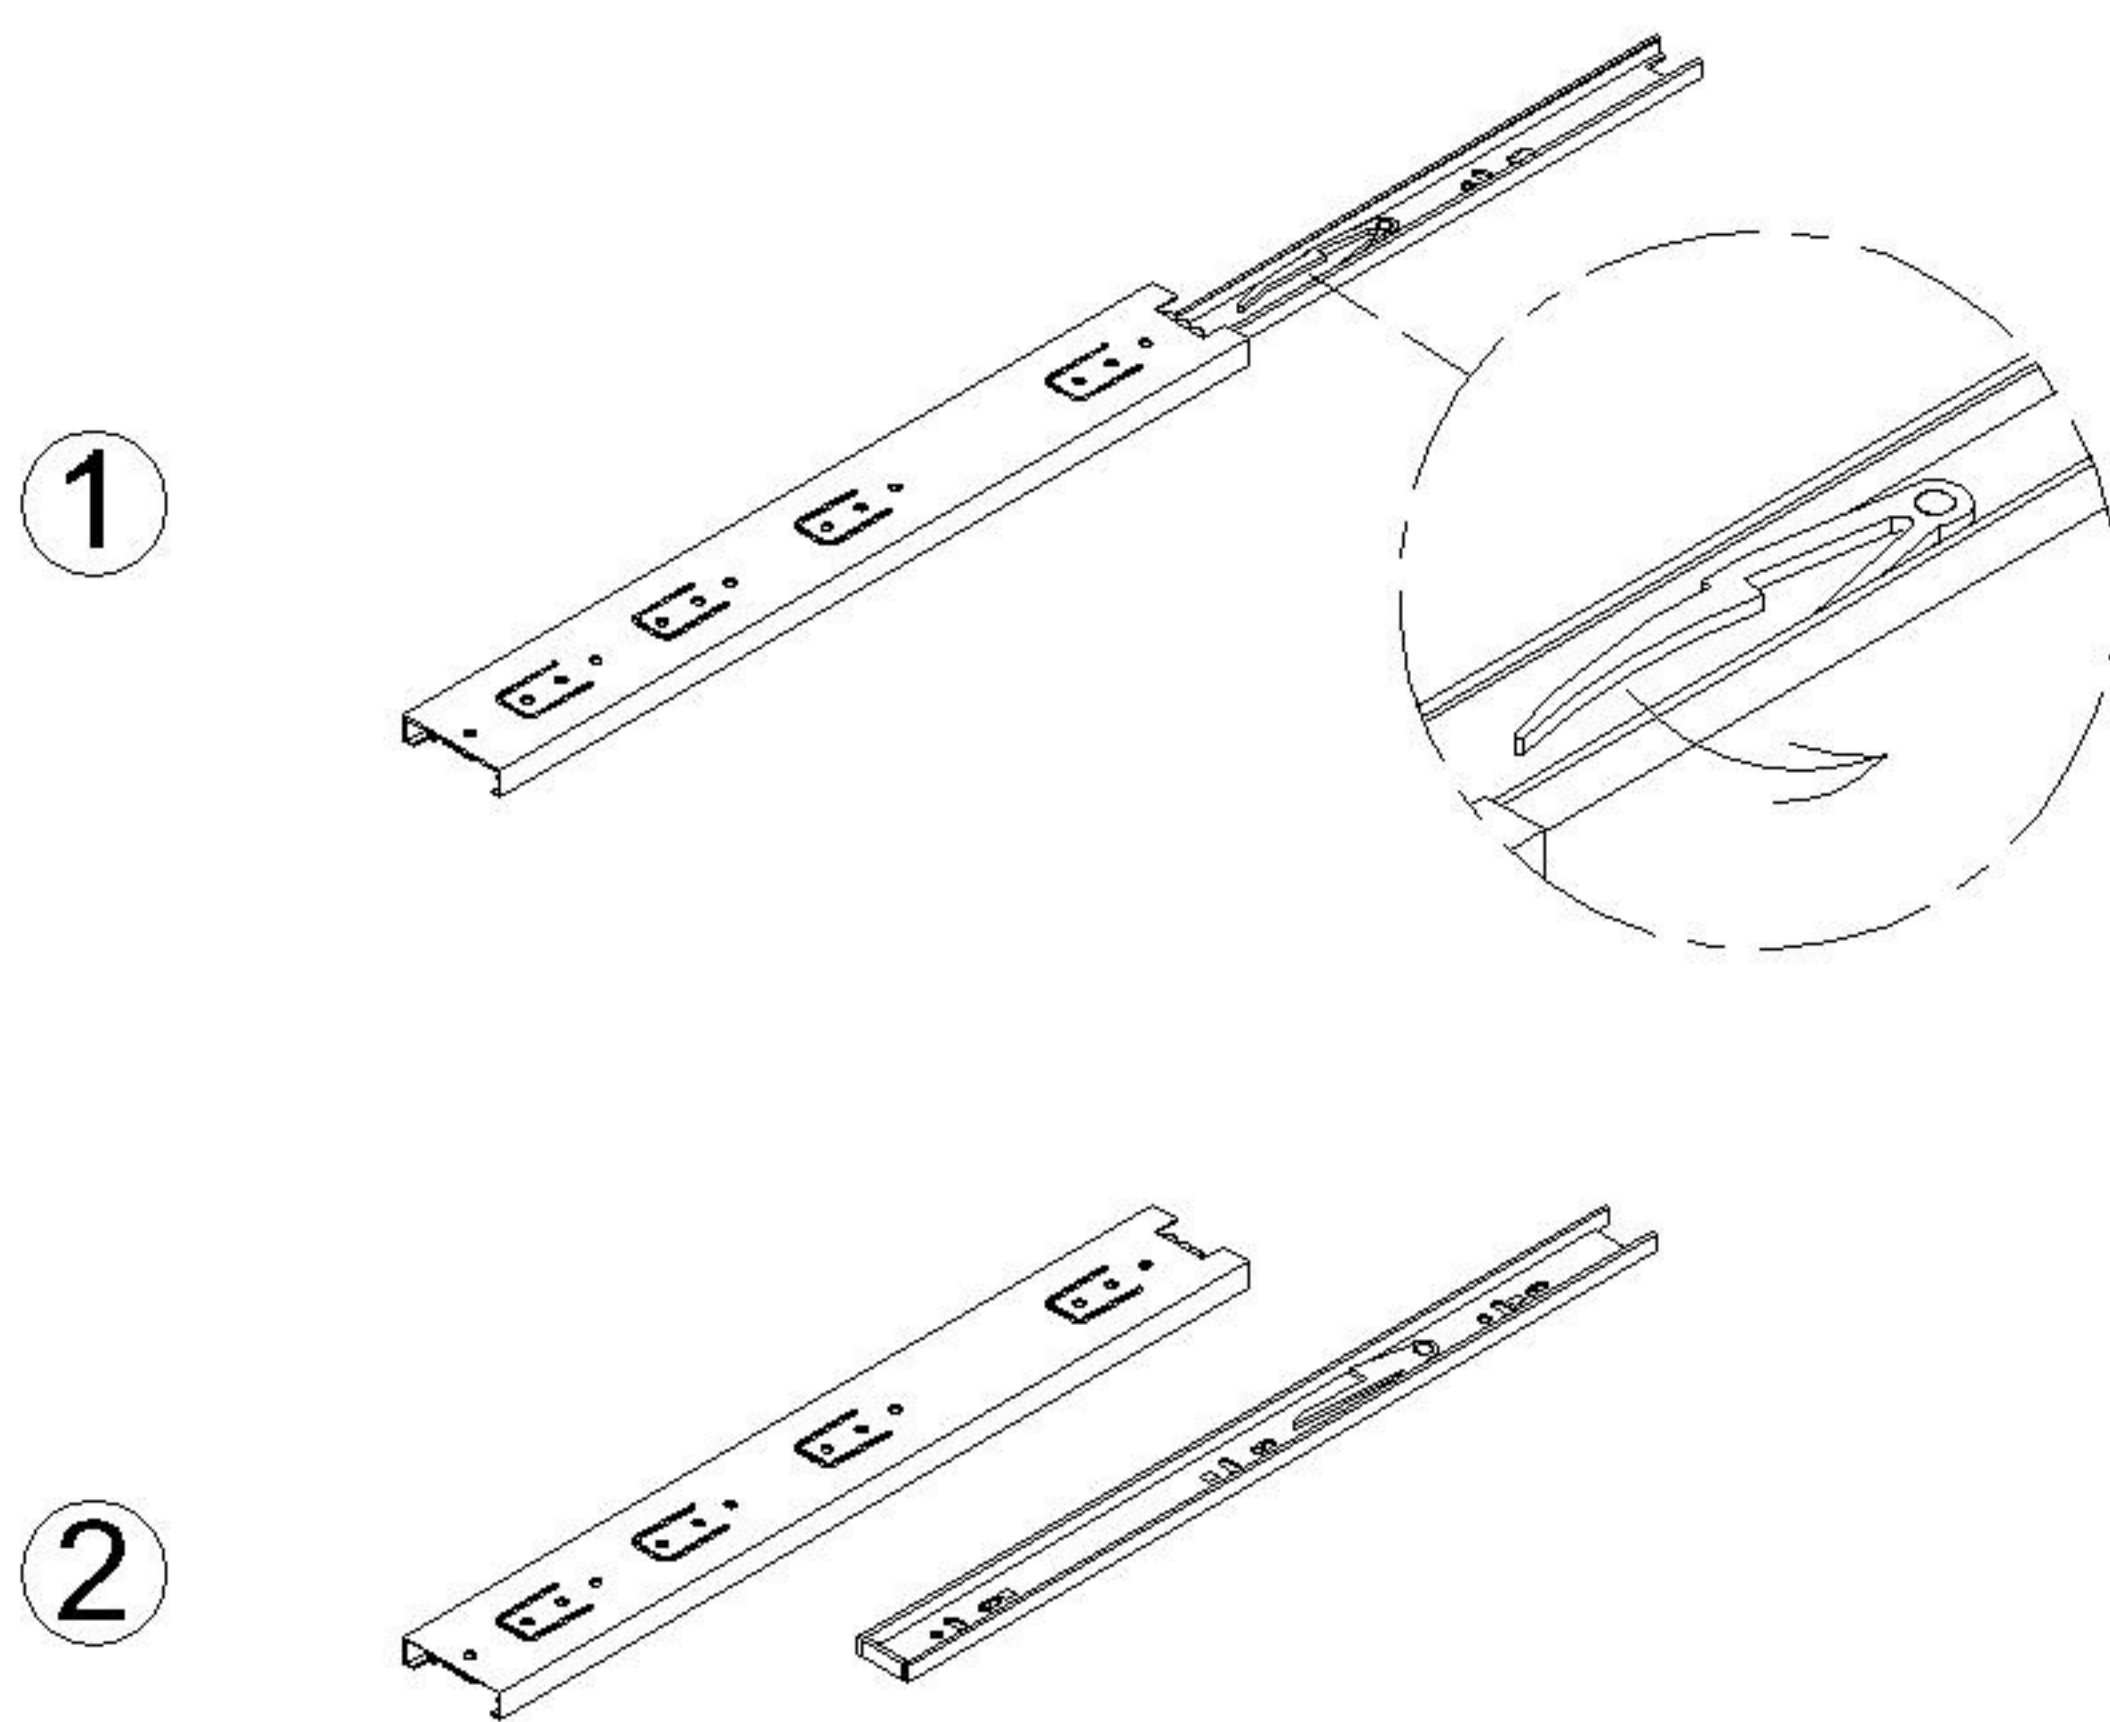

Disassemble the glides to tighten on panel. Glides will be disassembled in 2 parts, 1 part to fix on side panel and the other part to fix on drawer side.

4


Attach Dowel (N) to Post (F).

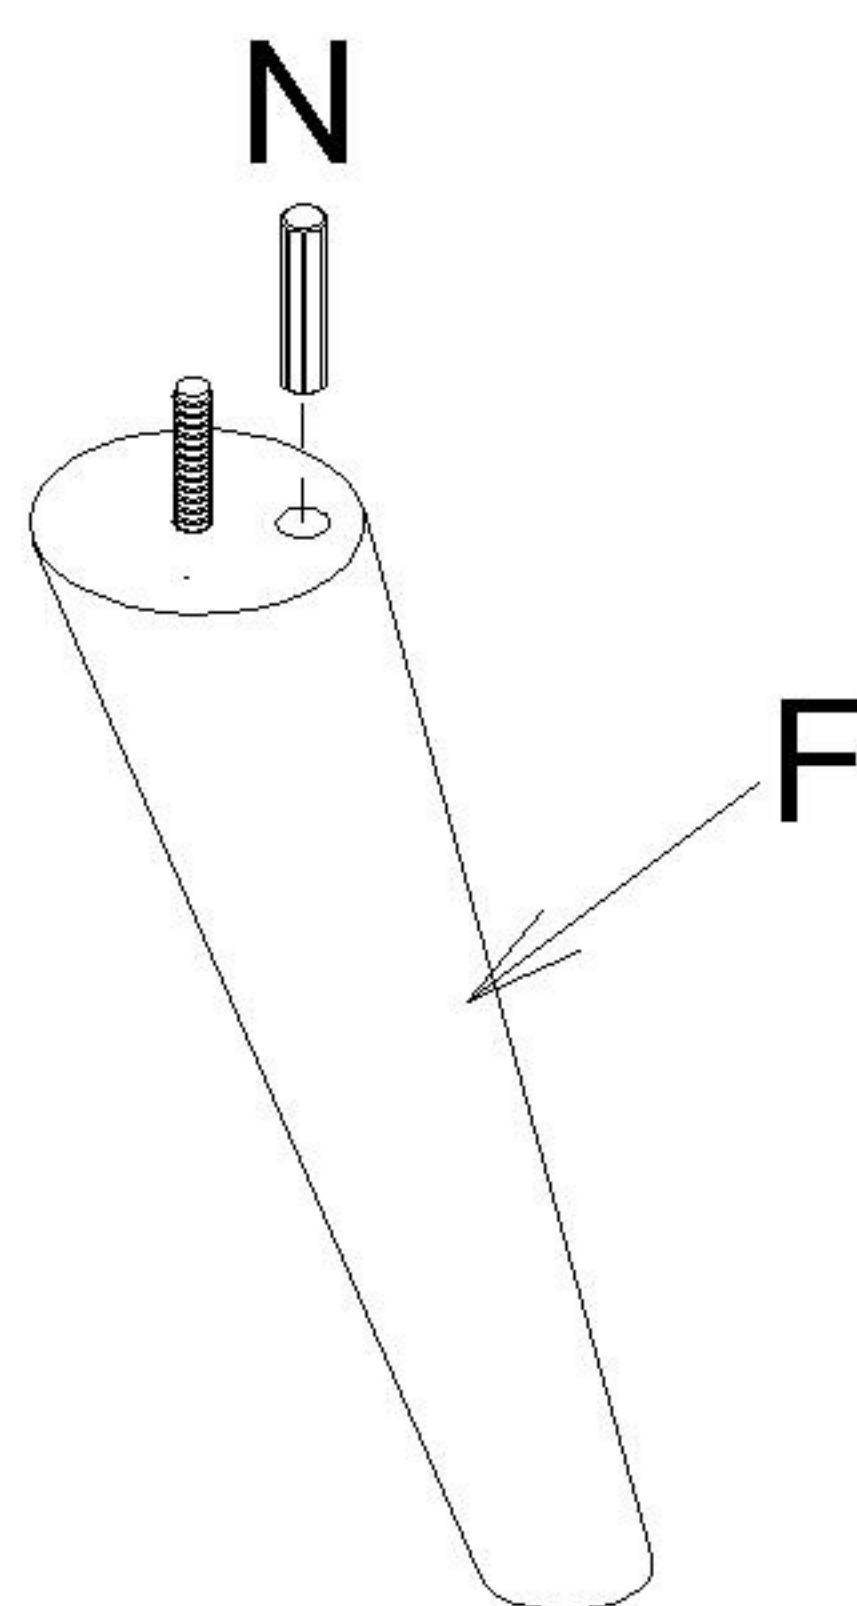




5

Attach Bottom Frame (D) to Side Panel Left & Right (B & C) and secure using Screw (X).

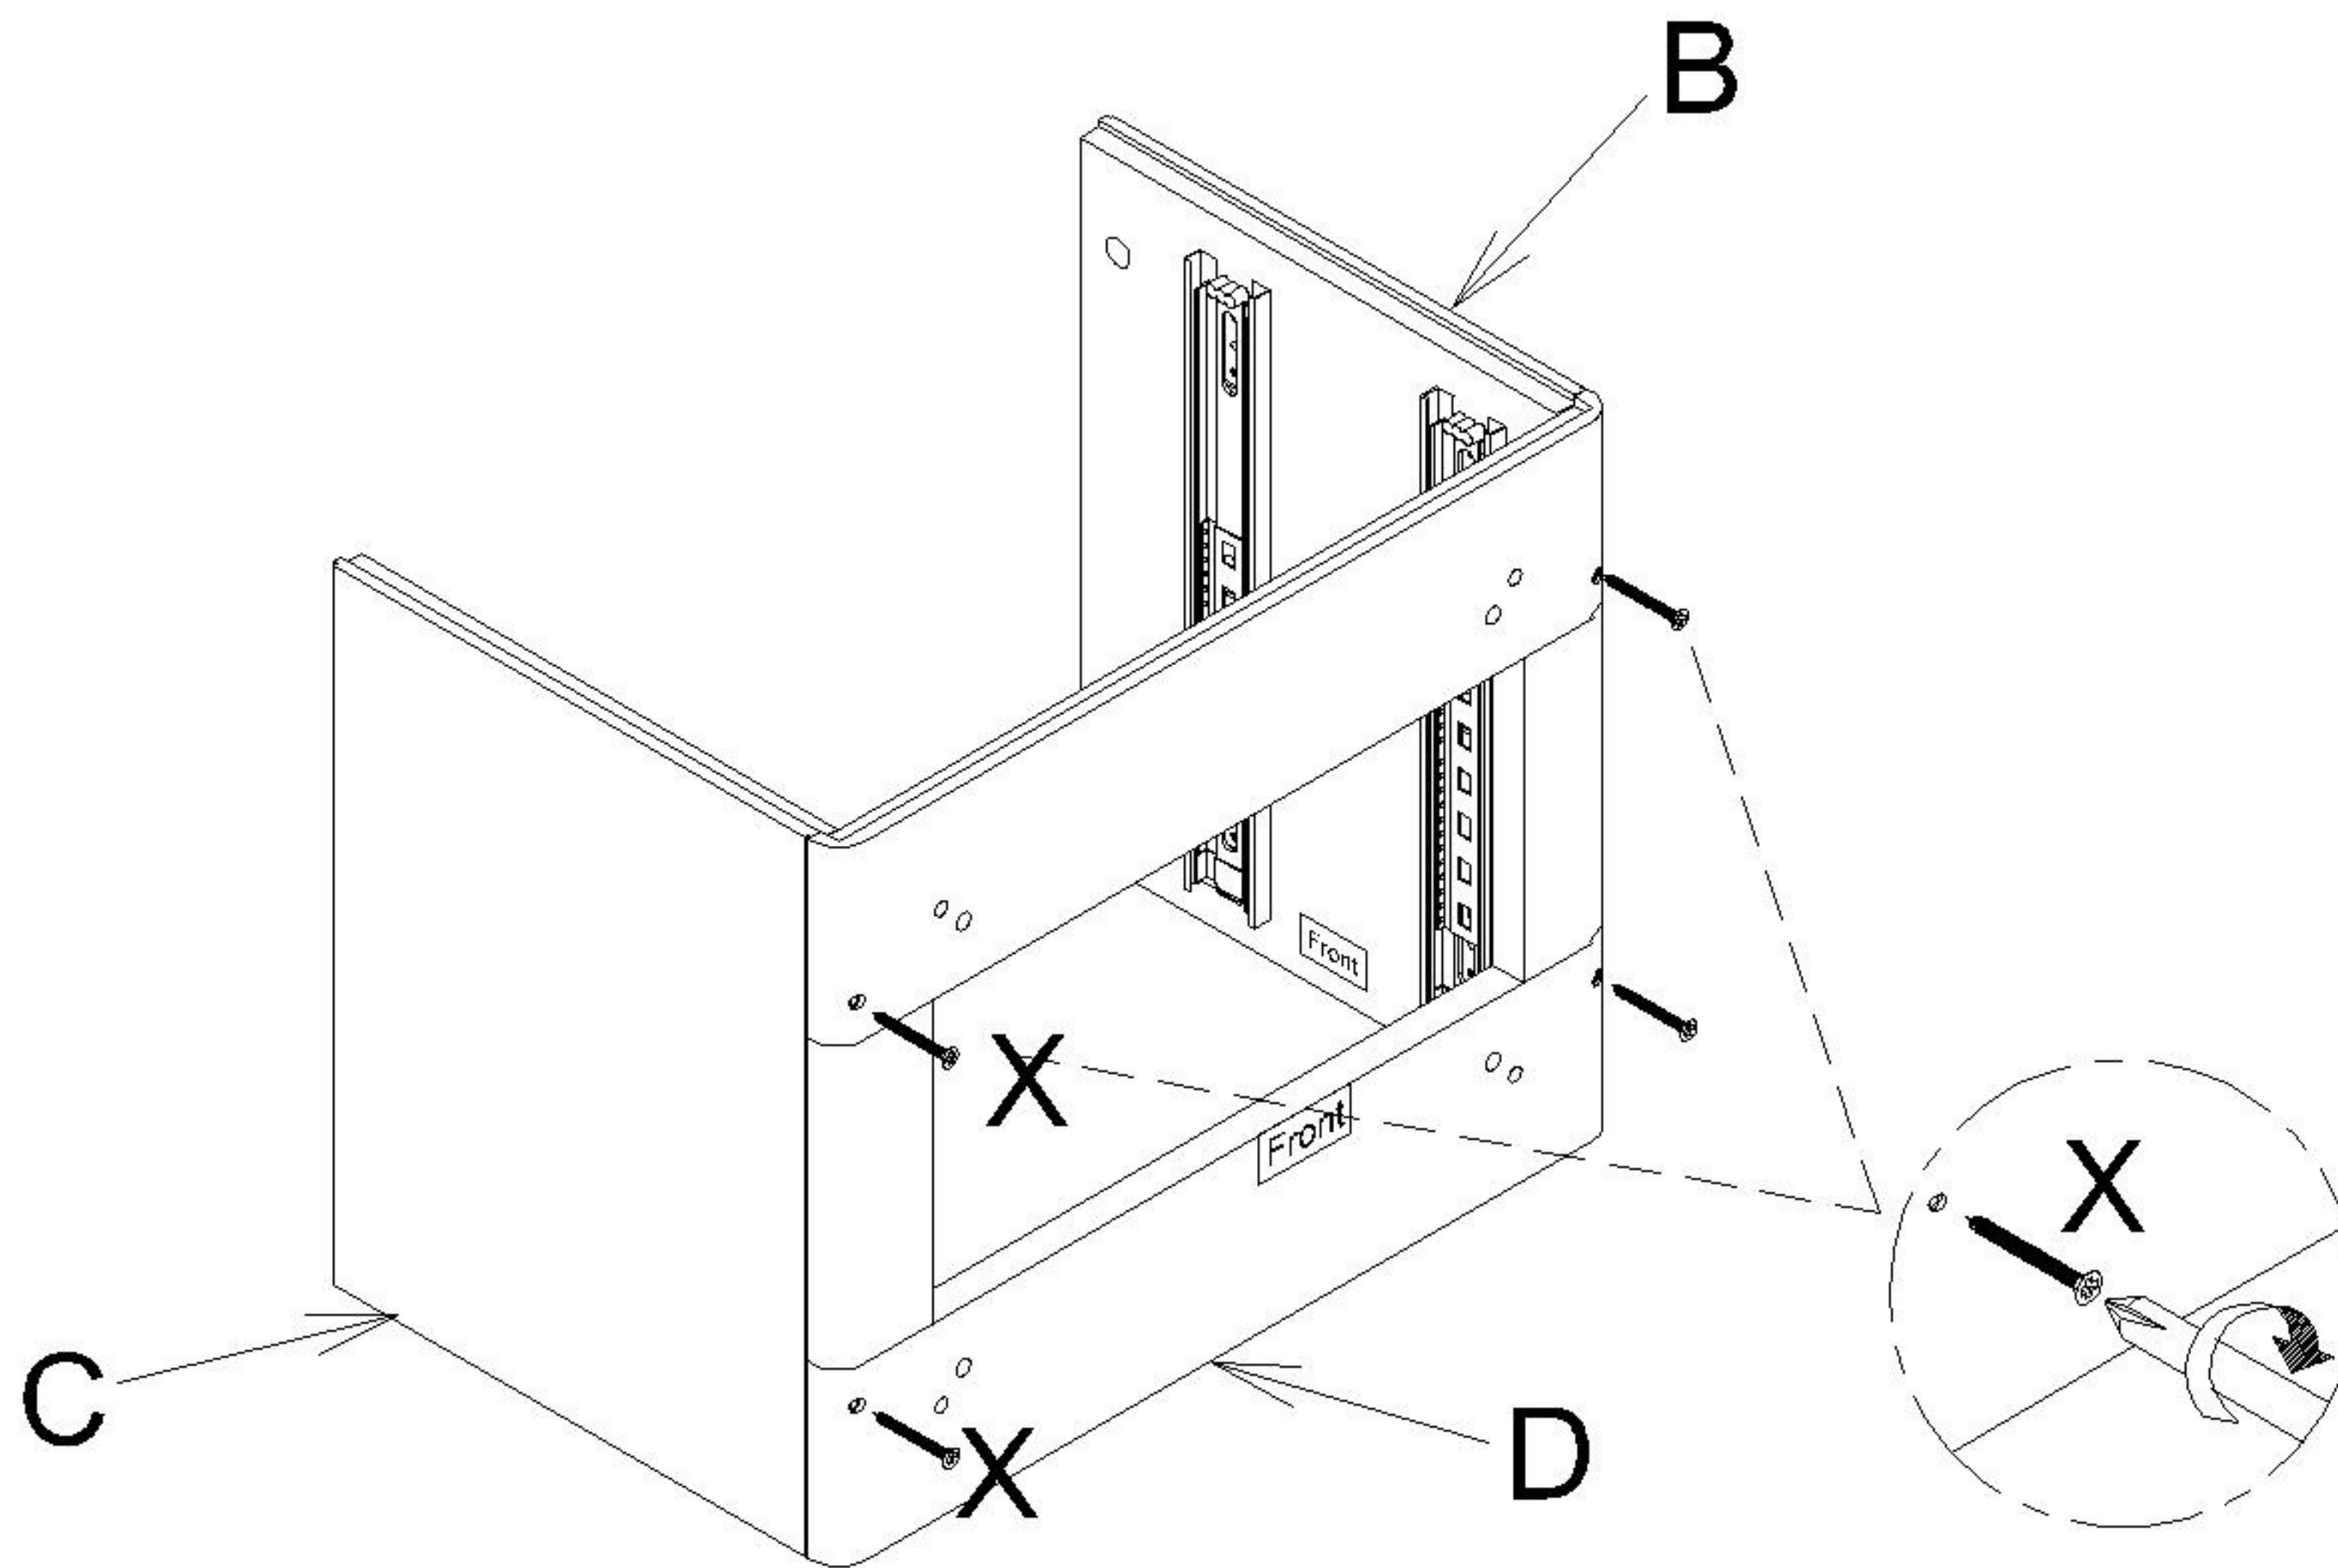


6

Attach Top Panel (A) to Side Panel Left & Right (B & C) and secure with Cam Lock (O). Cover Cam Lock (O) with Cam Lock Cover (R).

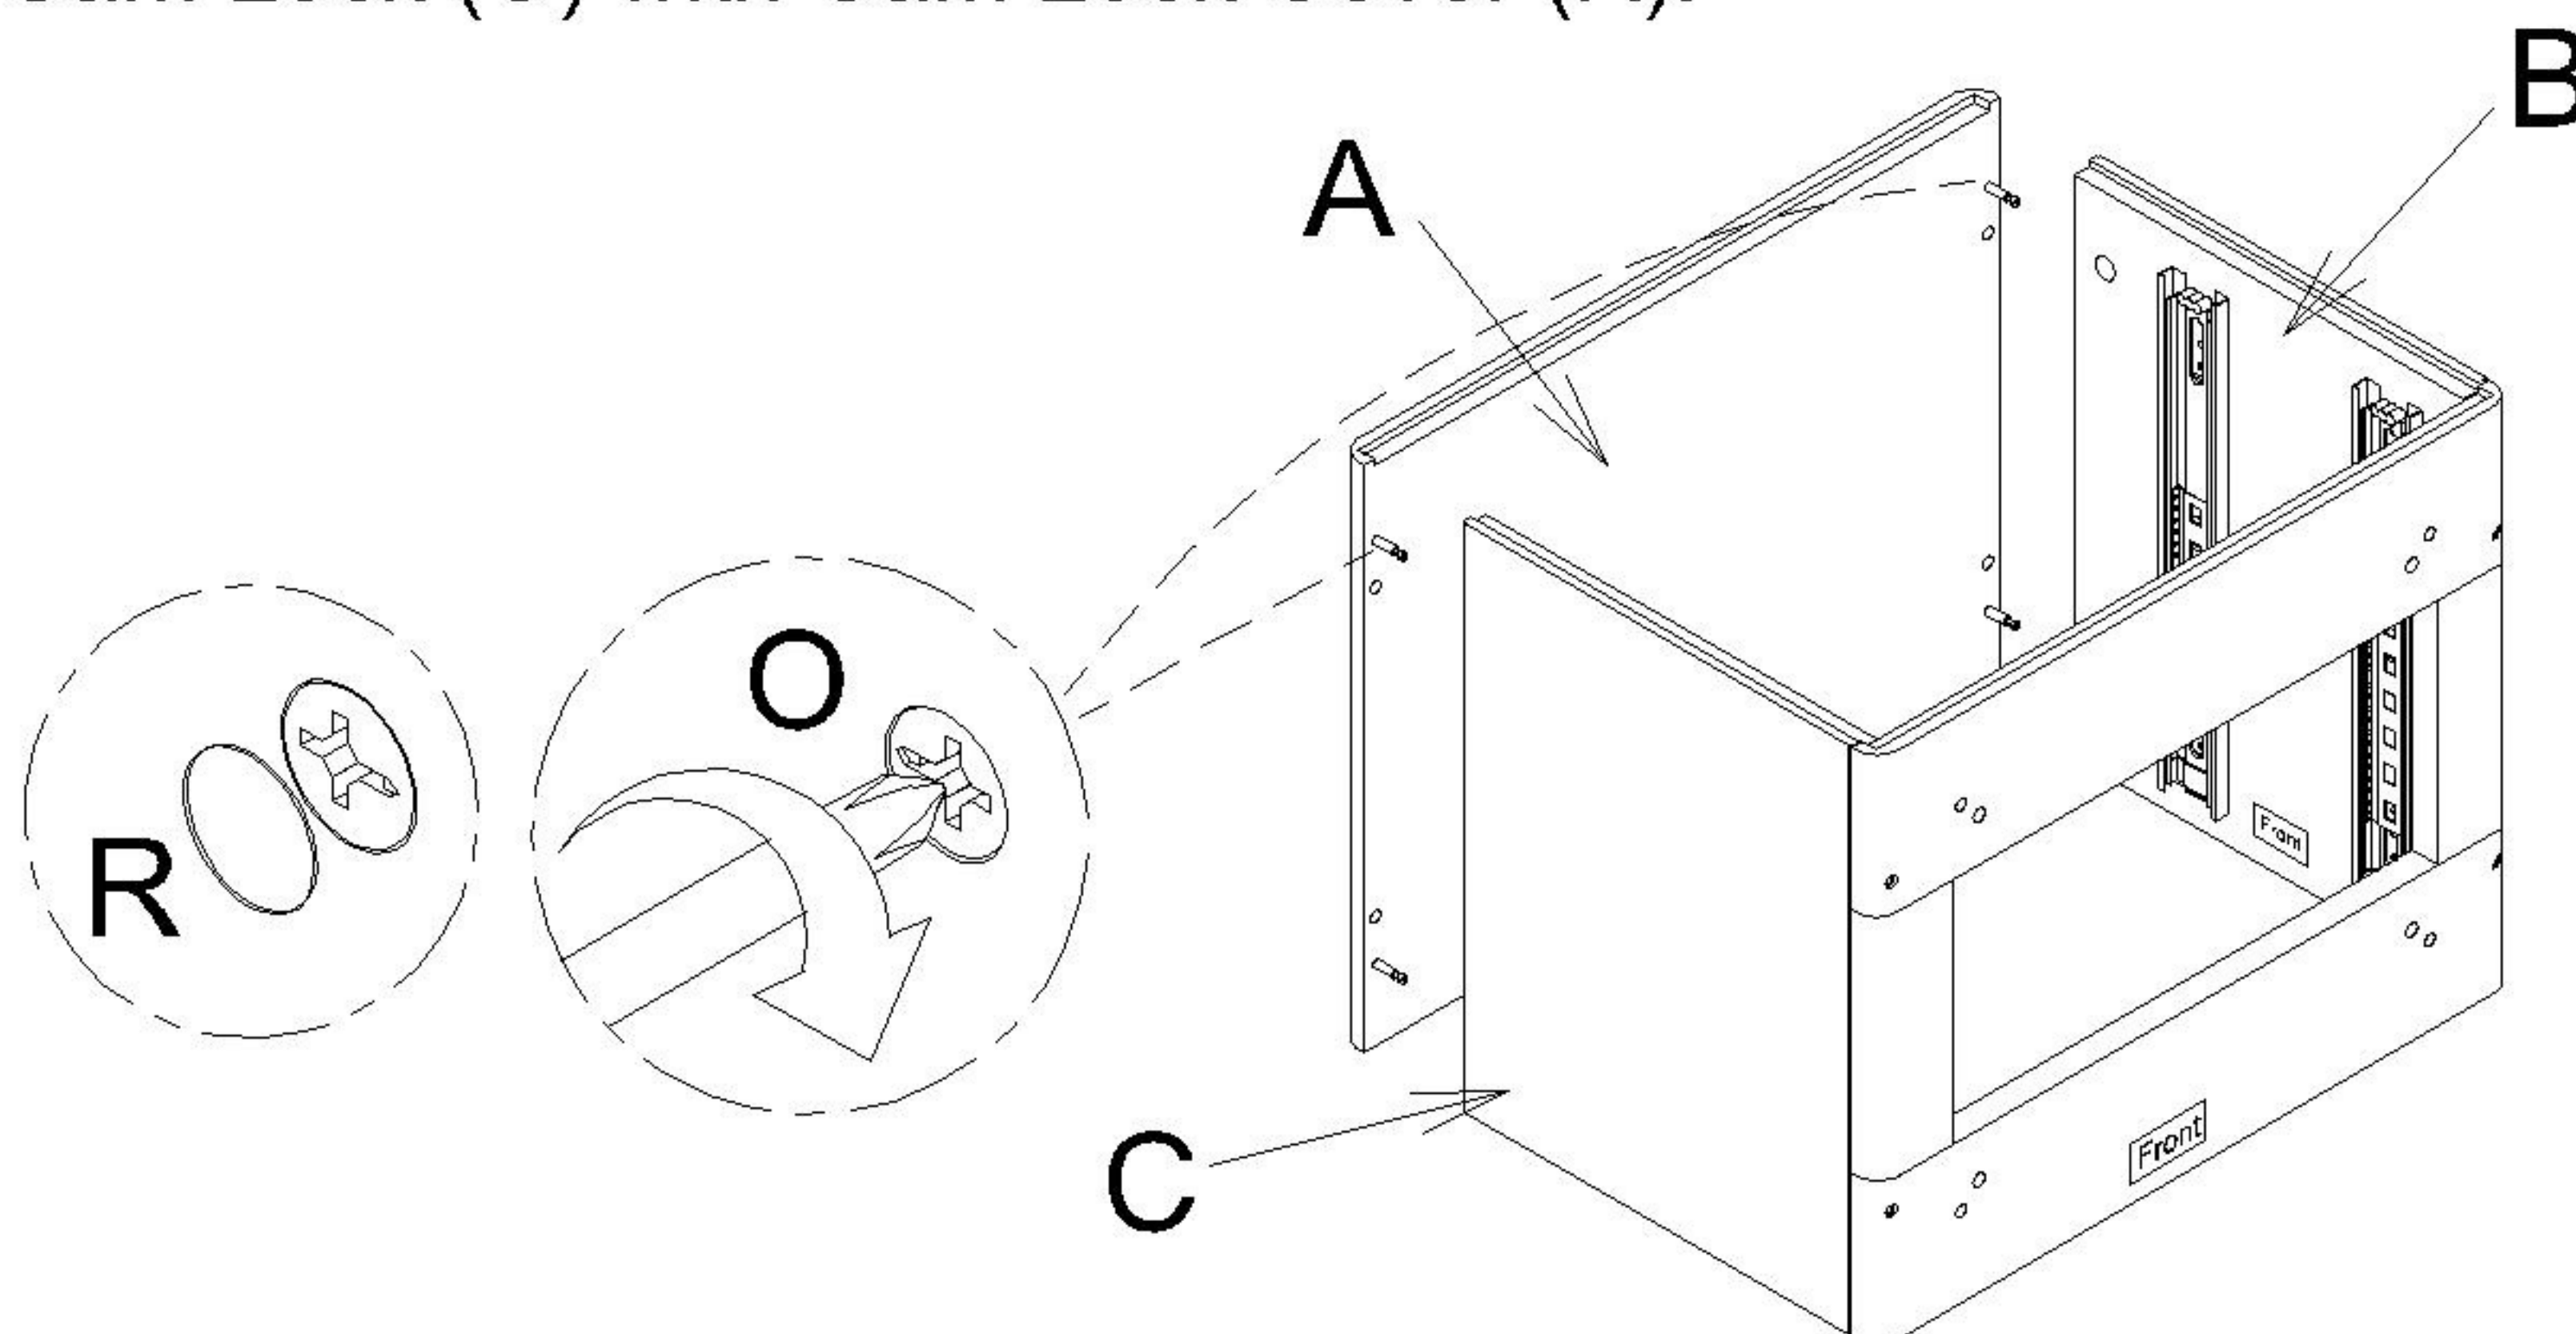

7


Attach Post (F) to Bottom Frame (D) and secure with Spring Washer (U), Flat Washer (T) & Hex Nut (V) and tighten with Spanner (W) clockwise.

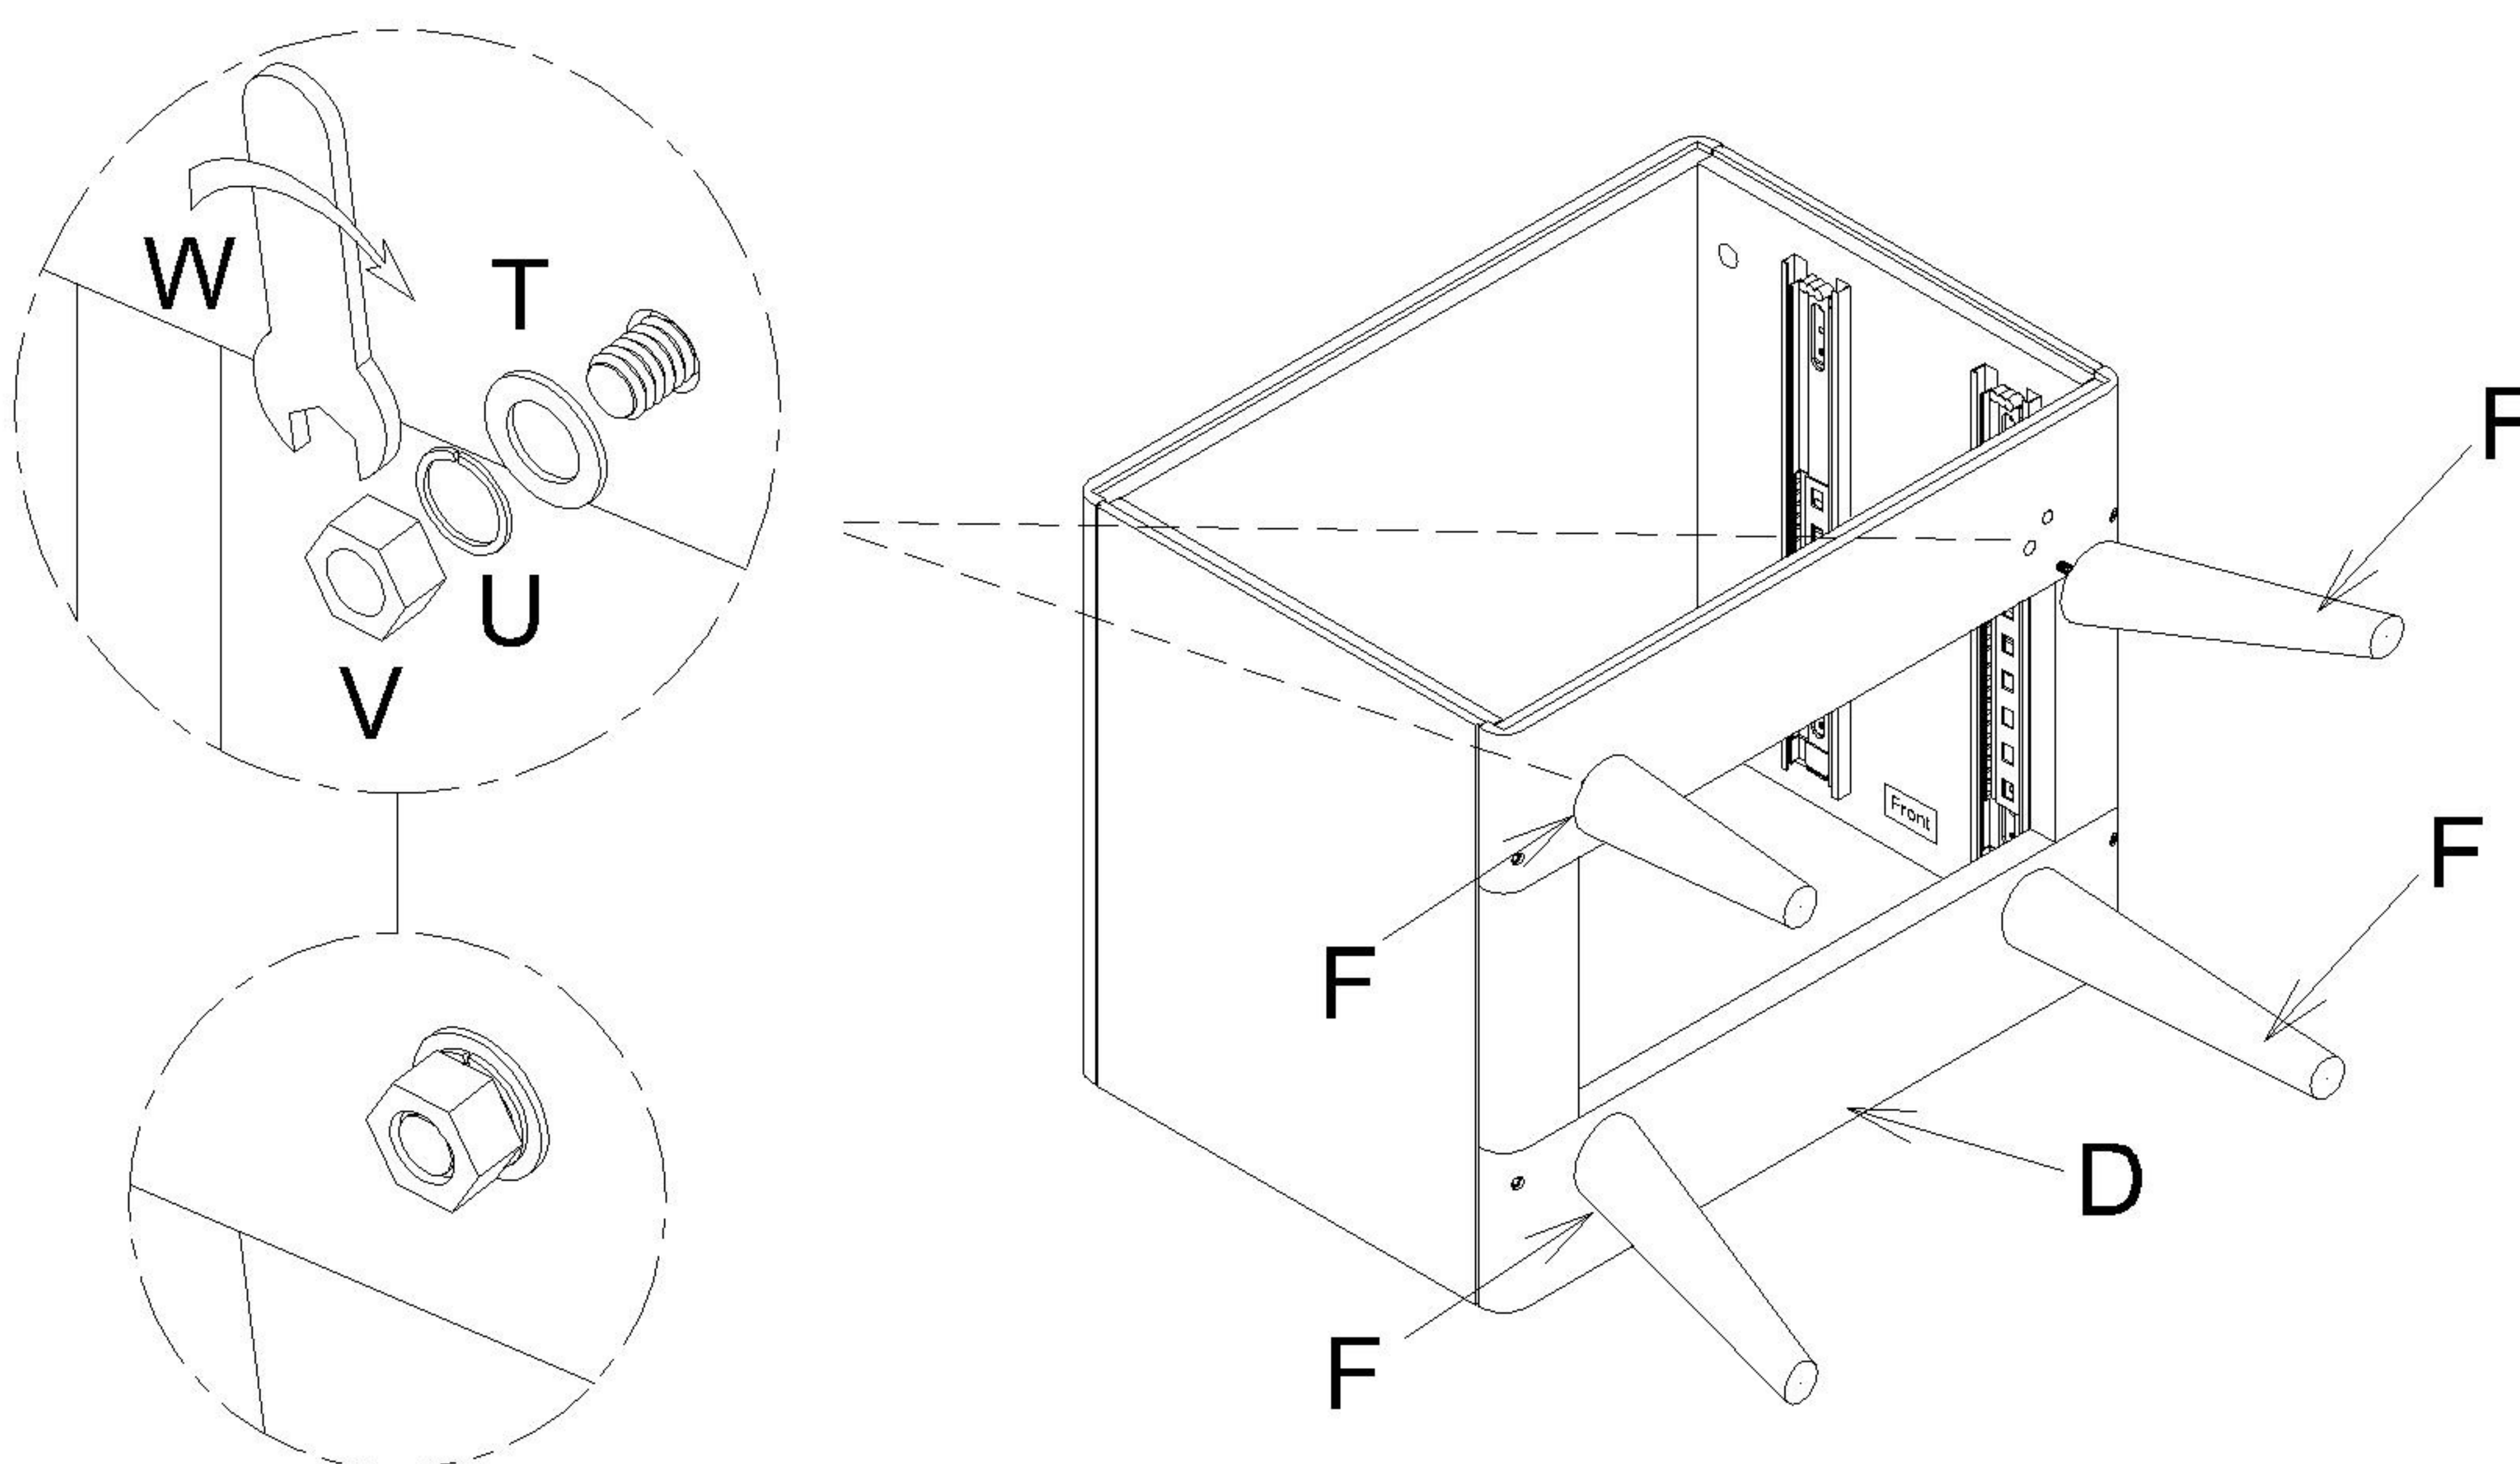




8

Attach Back Plywood (E) to assembled unit using Panhead Screw (S) to secure.

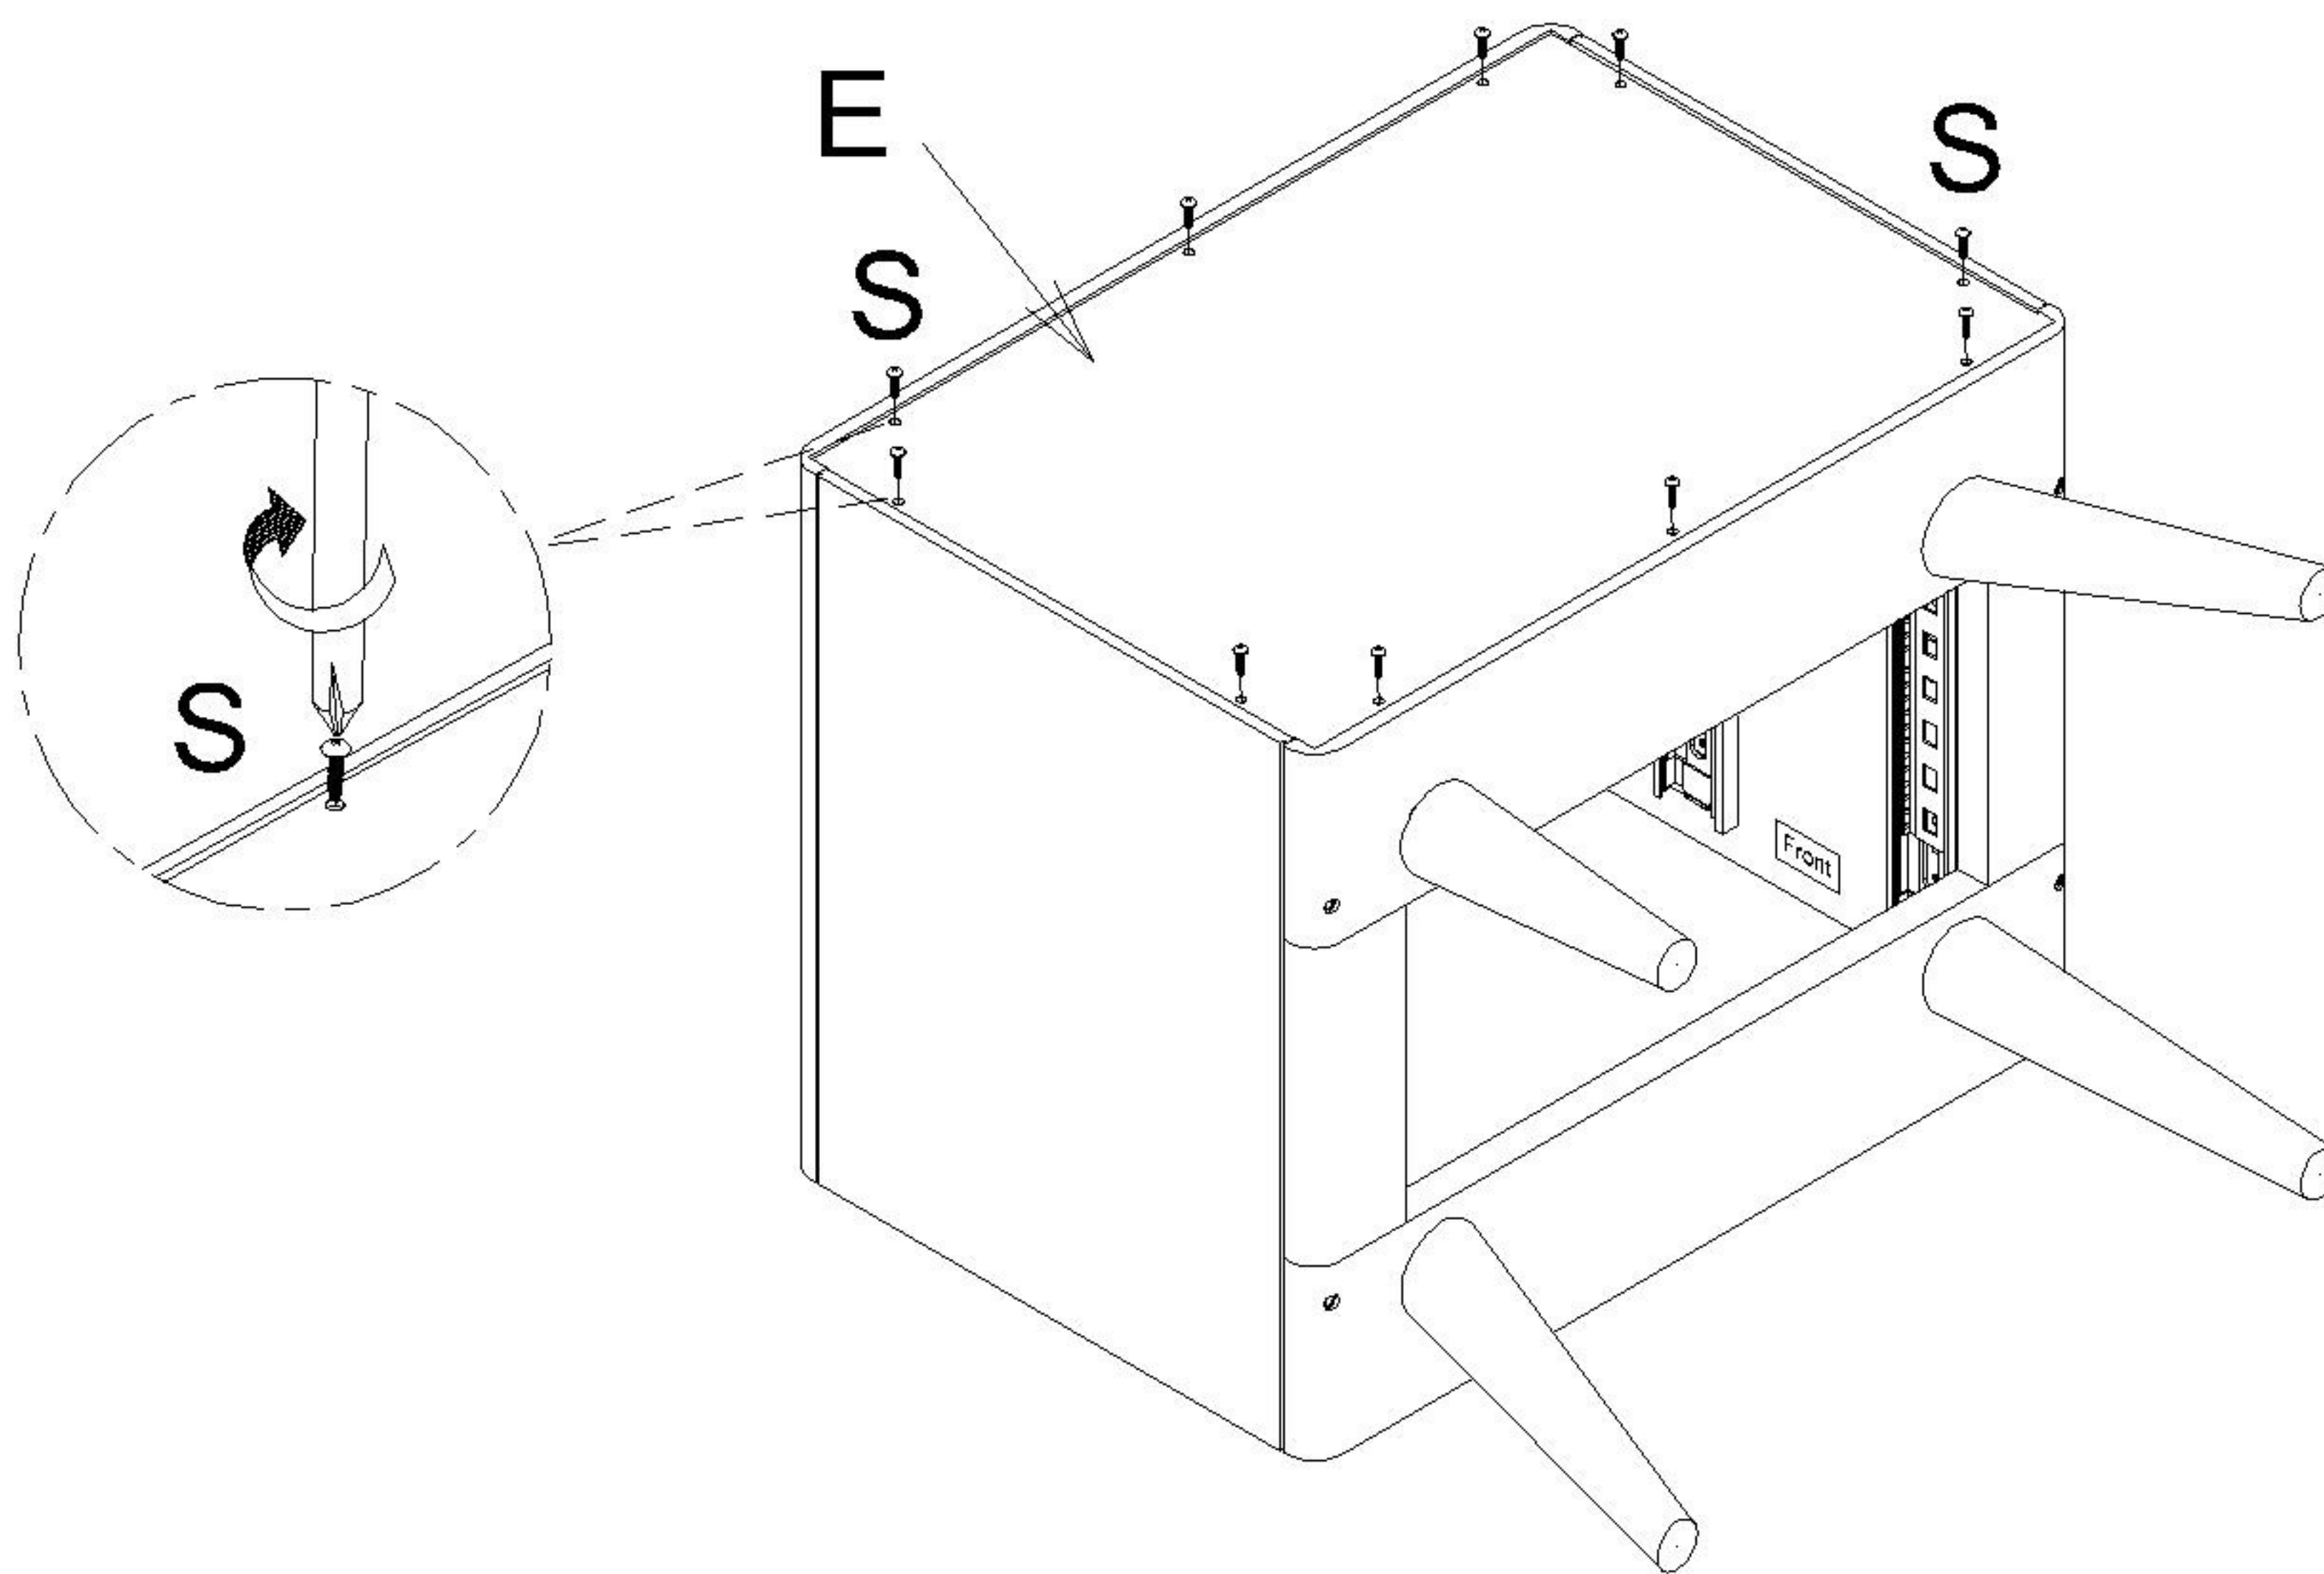


9

Attach Extension Runner (M) to Left & Right Drawer Side (H & K) using Screw (L) to secure.

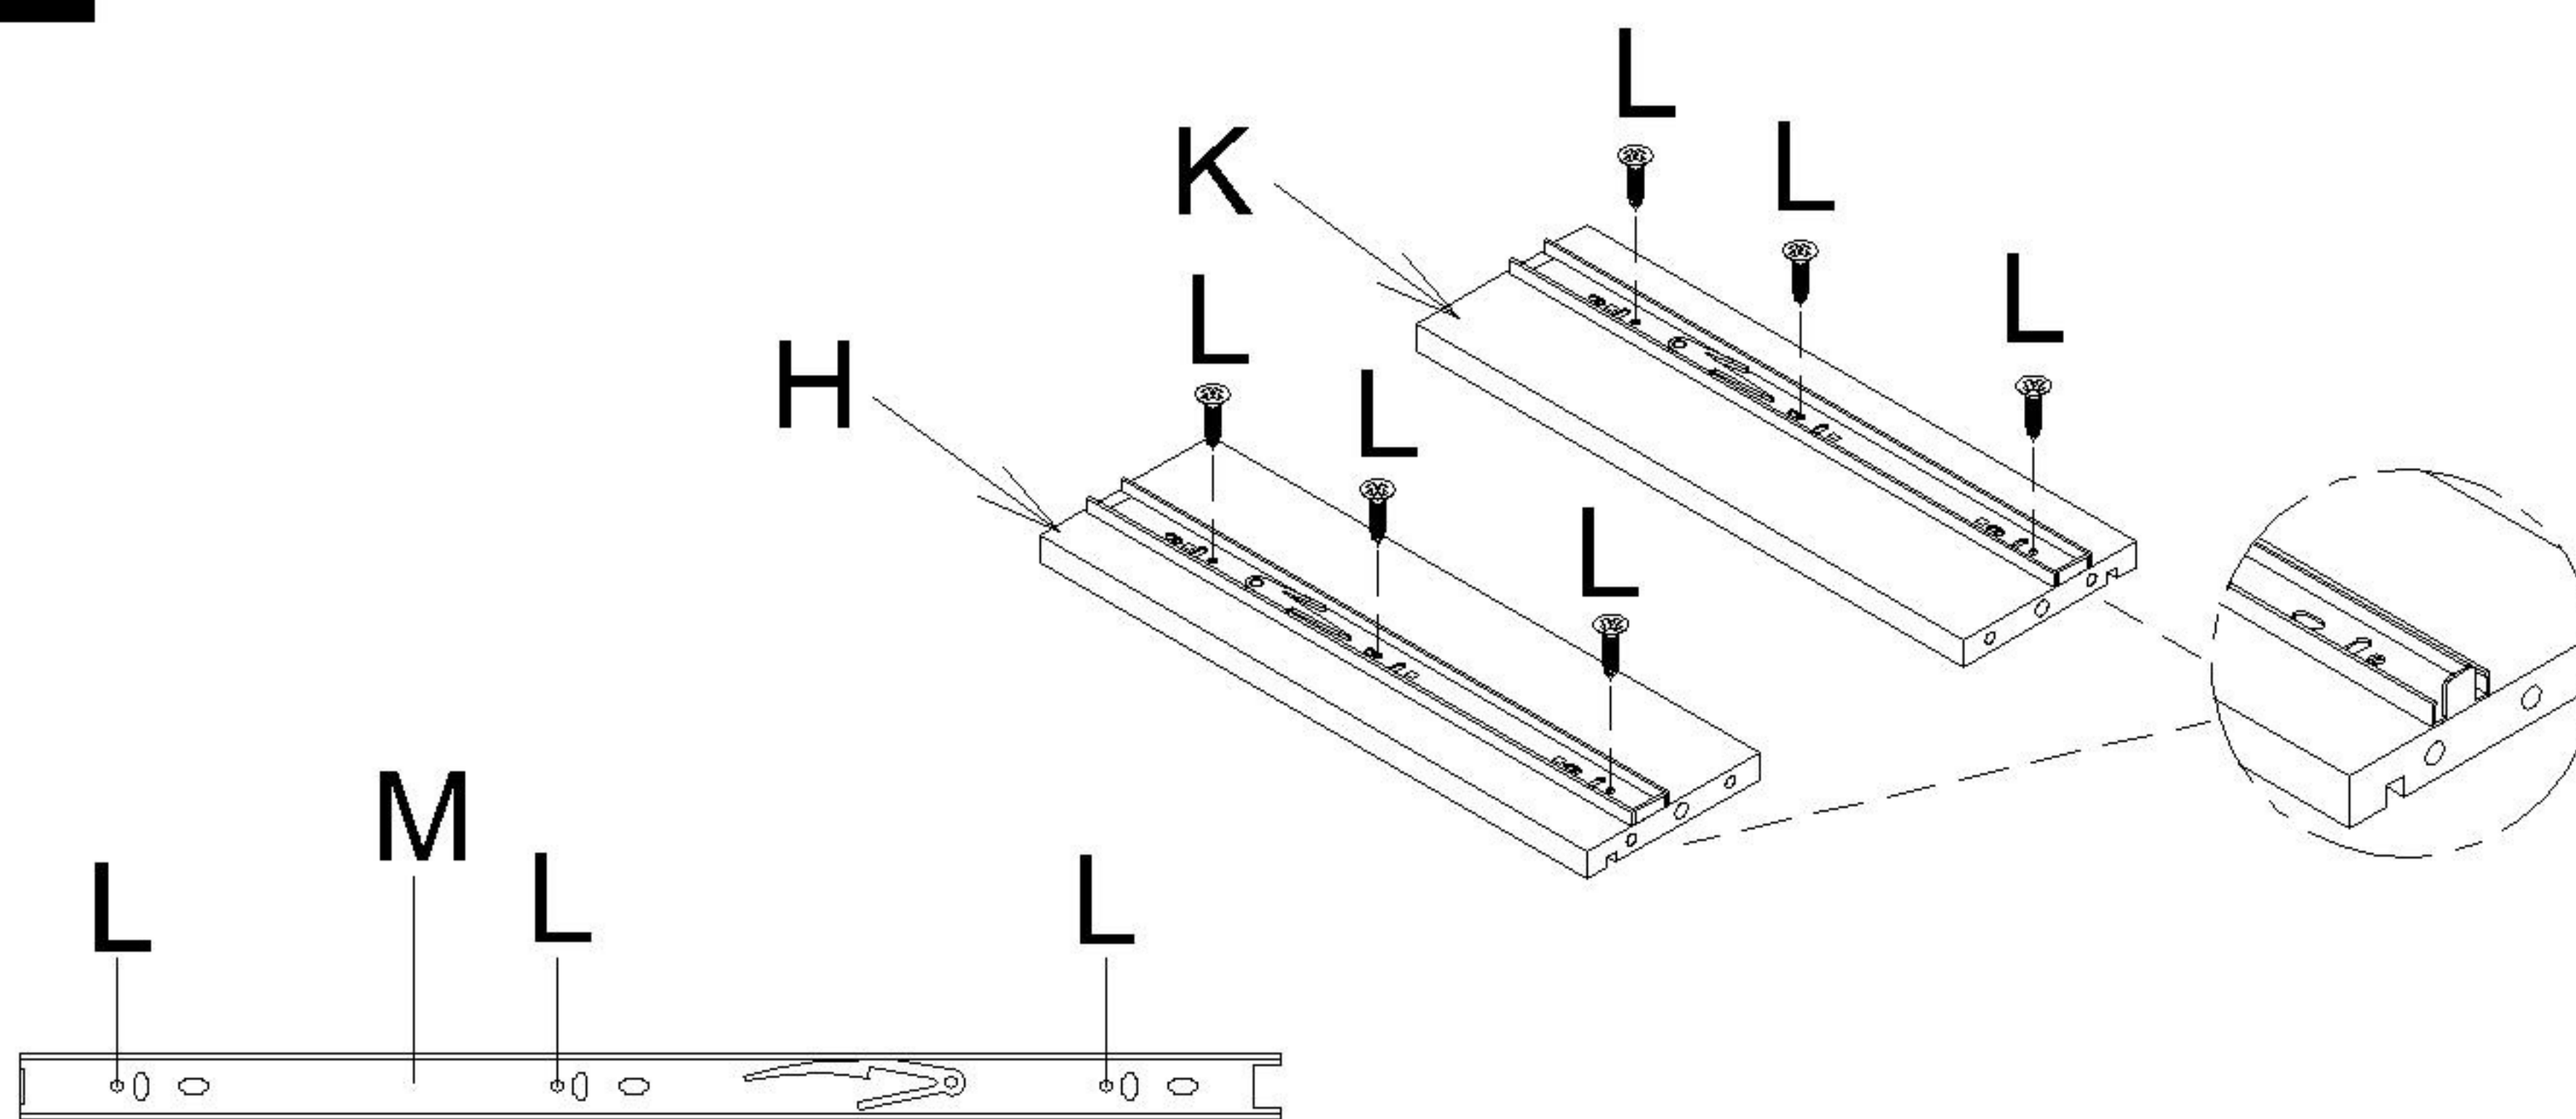


10

Insert Dowel (Q) to Left & Right Drawer Side (H & K) & Drawer Back (I). Attach Cam Lock (O) to Left & Right Drawer Side (H & K) & Drawer Back (I). Attach Cam Bolt (P) to Drawer Front (G) & Left & Right Drawer Side (H & K).

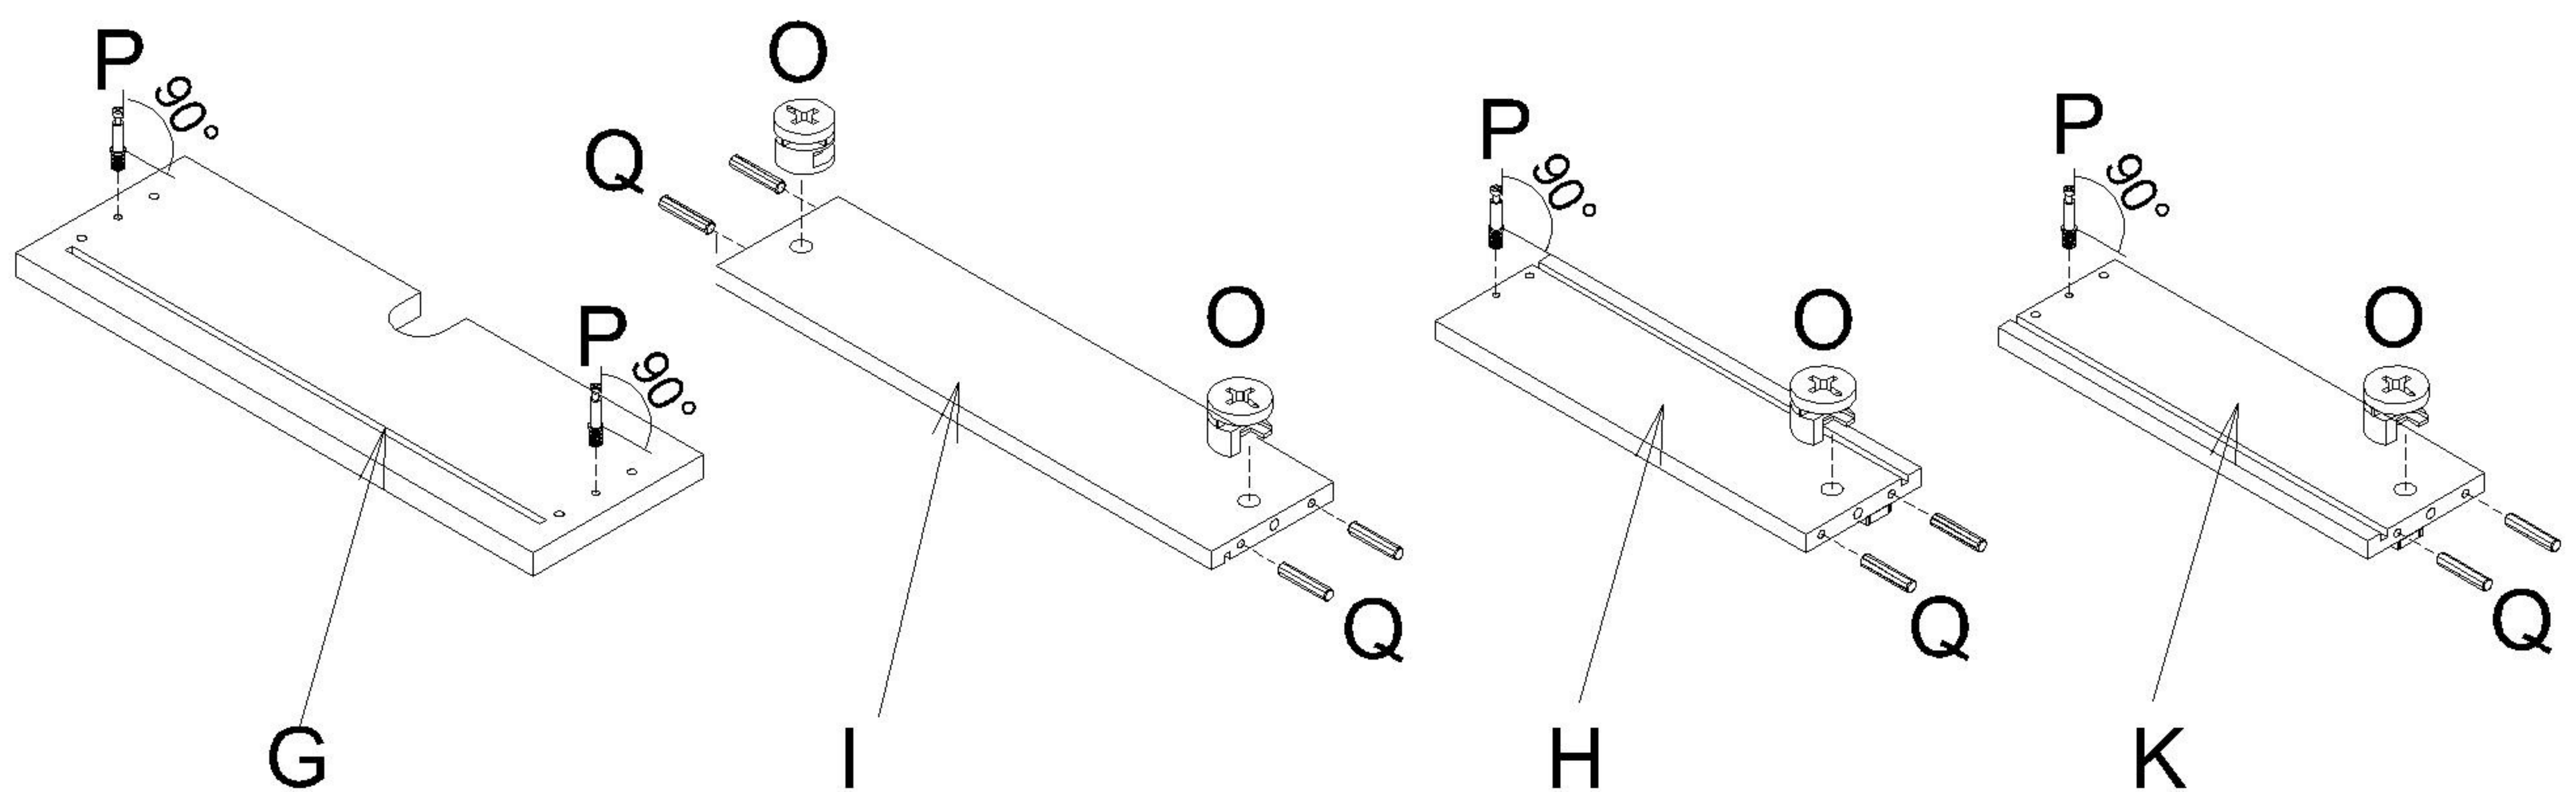





- 11** Attach Left & Right Drawer Side (H & K) to Drawer Back (I) and secure with Cam Lock (O). Use Cam Lock Cover (R) to cover Cam Lock (O).

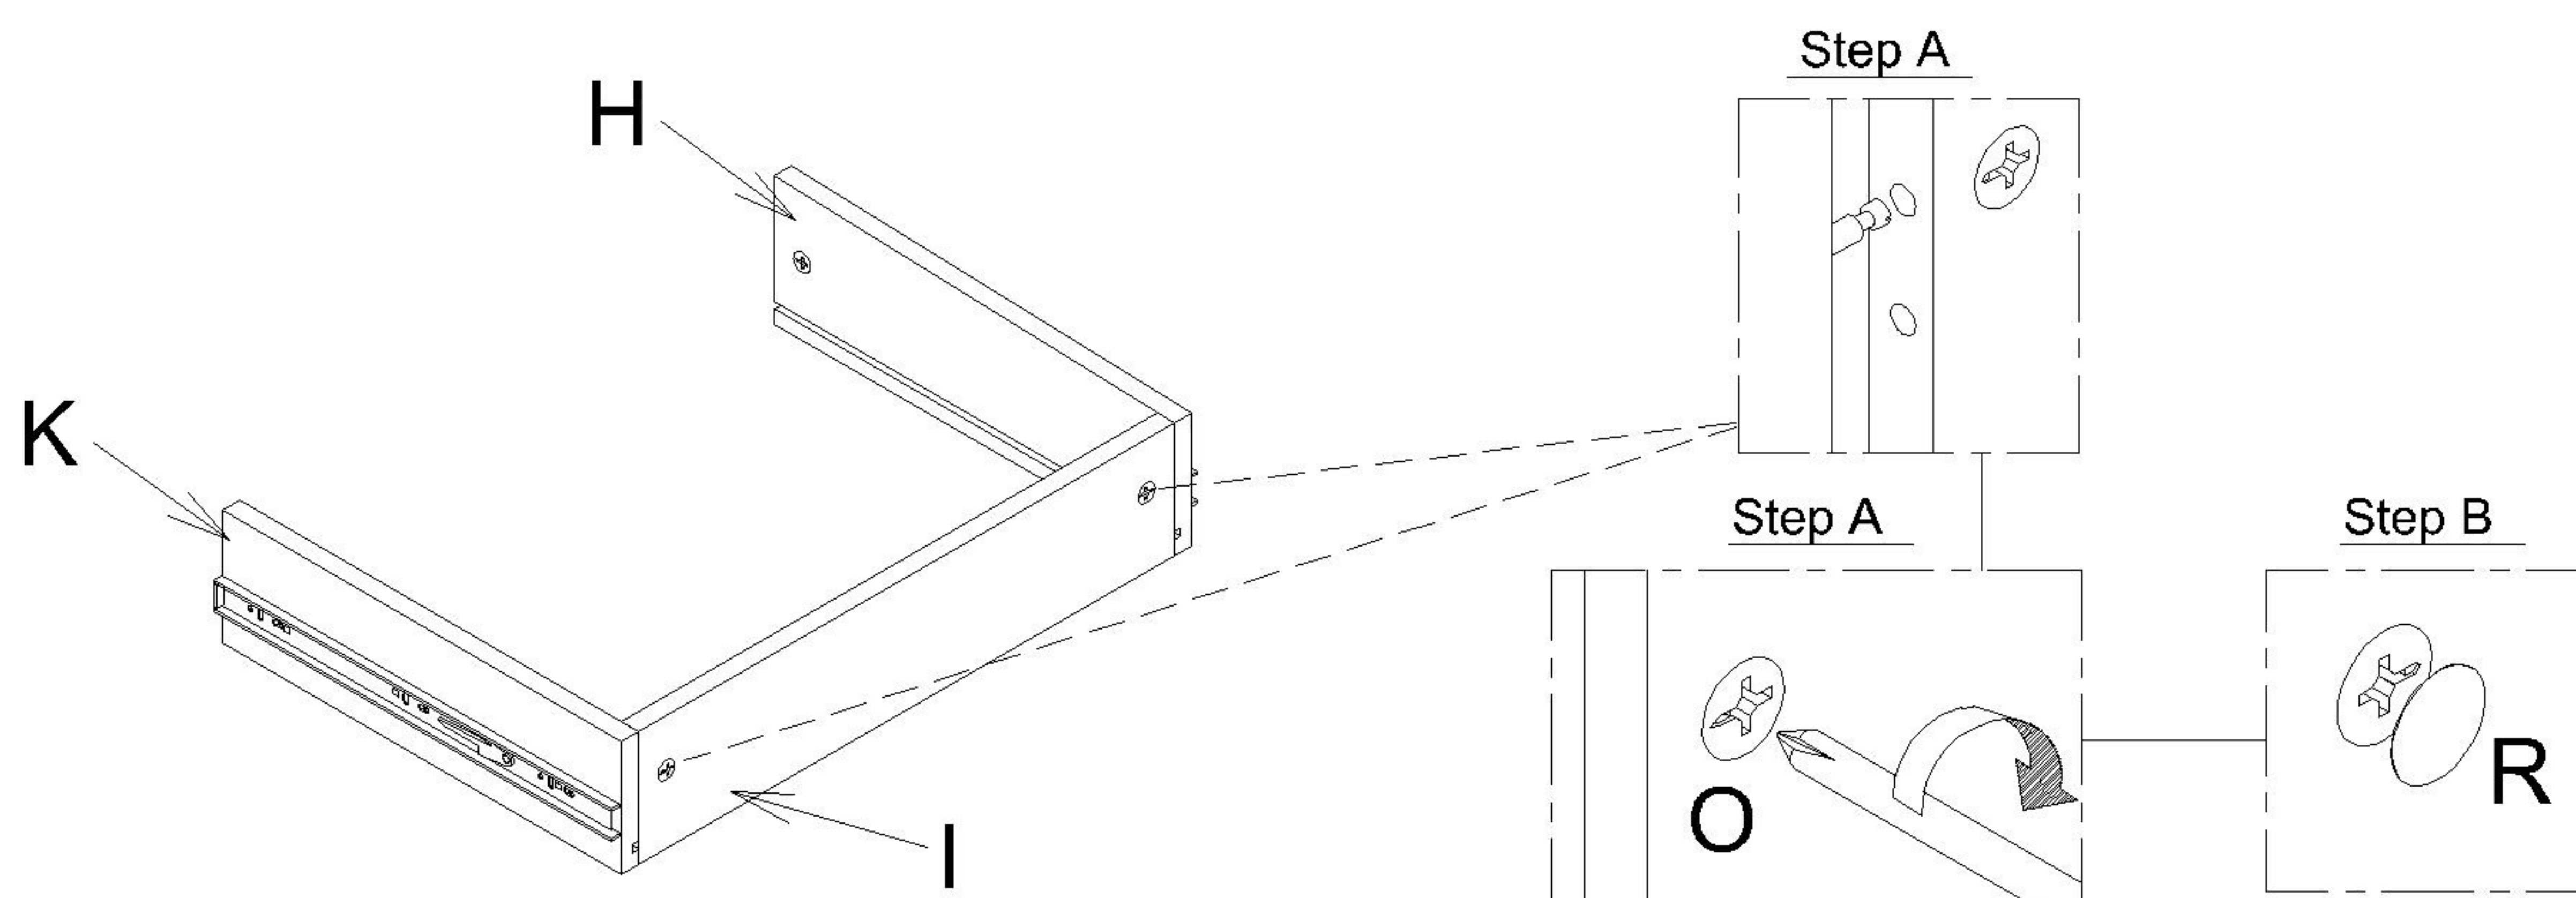

- 12** Slot in Drawer Base (J) in corresponding grooves. Attach Drawer Front (G) to Drawer Box and secure with Cam Lock (O). Use Cam Lock Cover (R) to cover Cam Lock (O).

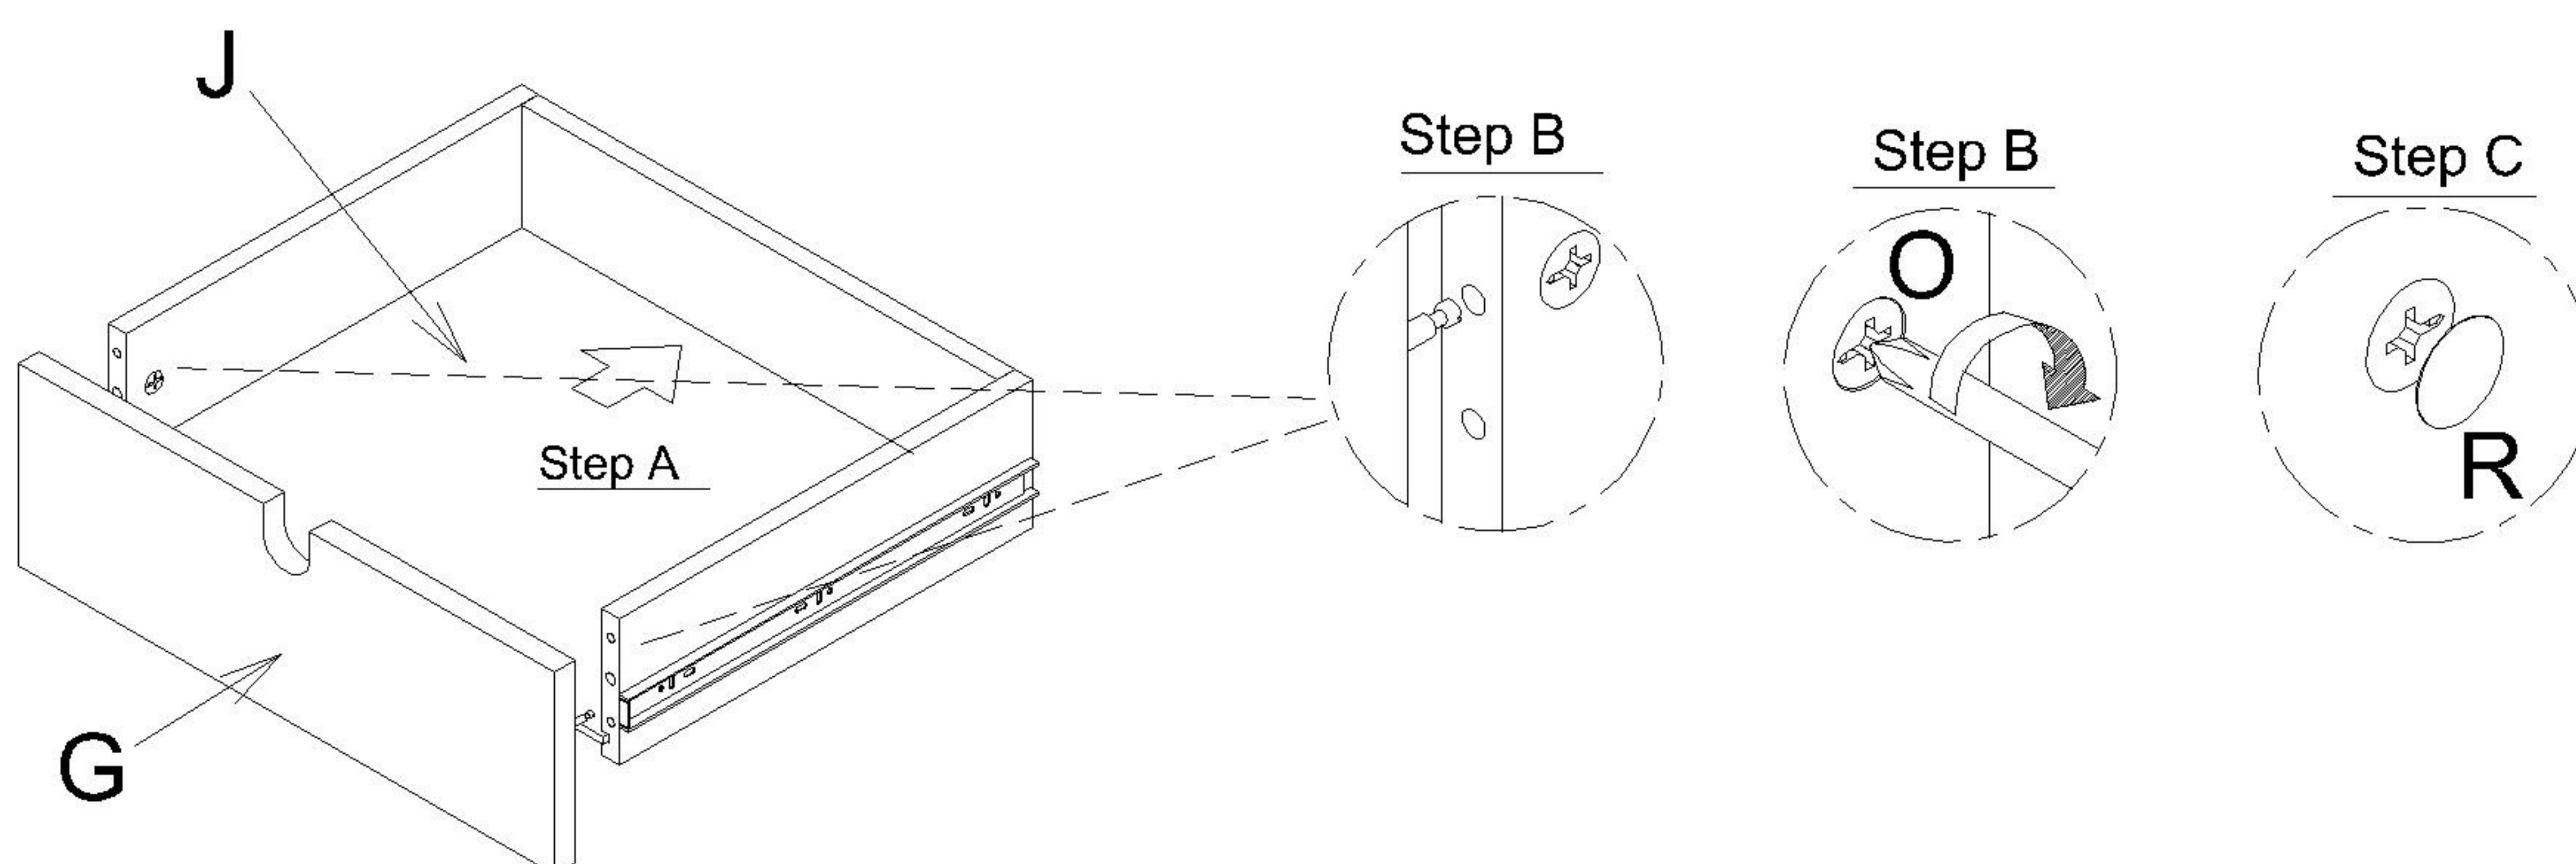

- 13** Slot Drawers into Assembled unit.

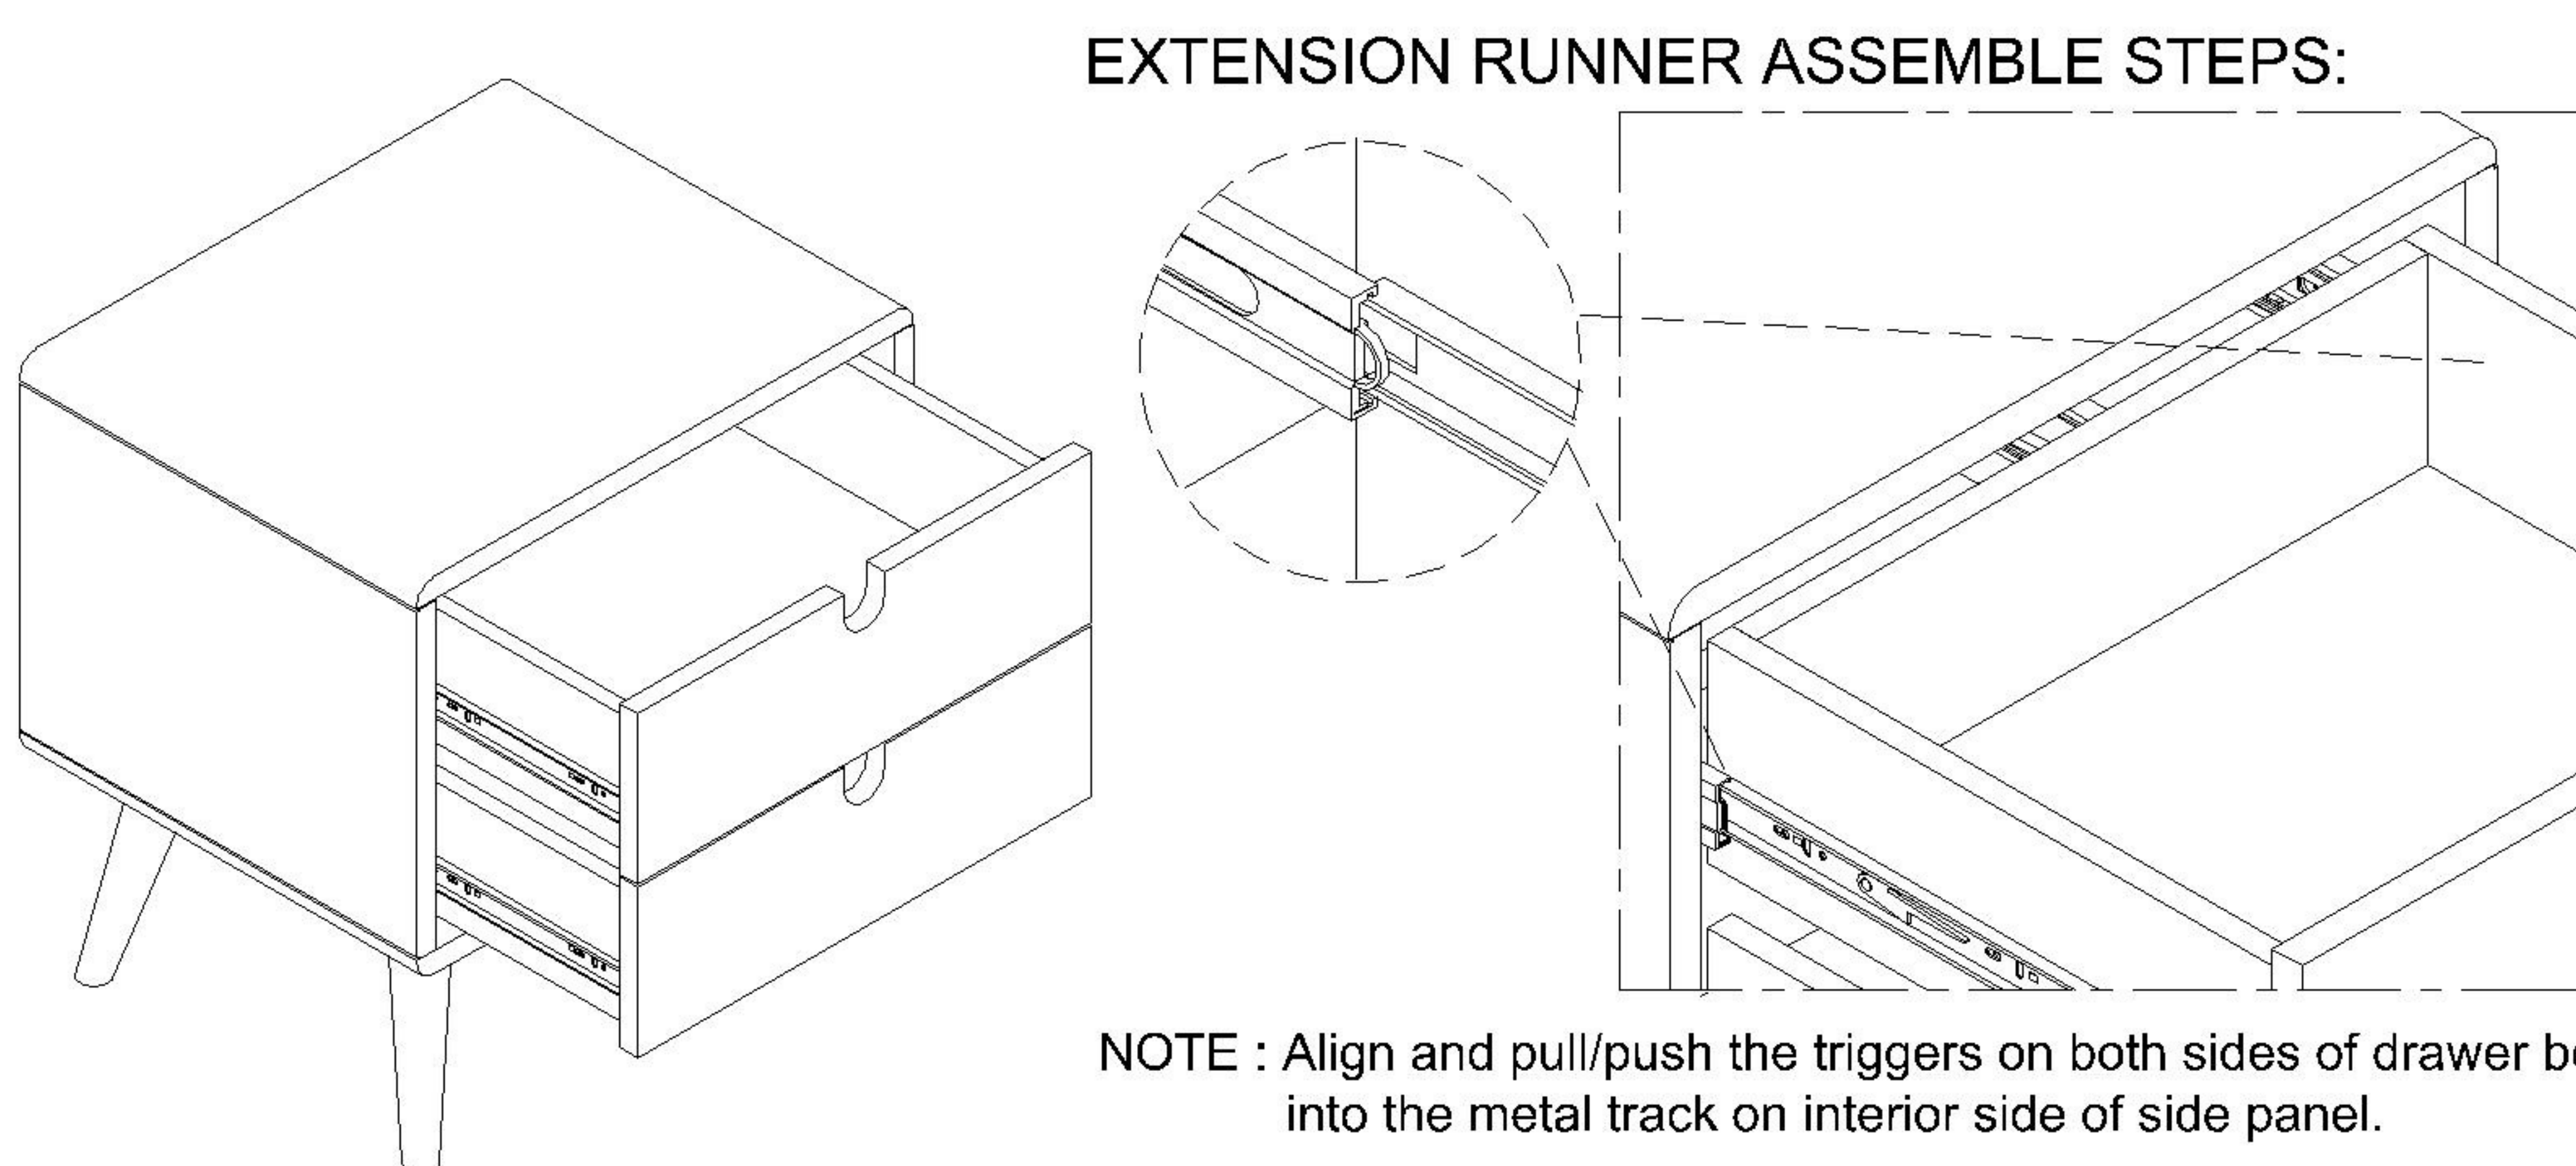

NOTE : Align and pull/push the triggers on both sides of drawer box into the metal track on interior side of side panel.

### Cleaning & Care

Treat surface with care. Surface is resistant to scratches but is not scratch resistant. Clean surfaces with a dry or damp soft cloth. Do not use abrasive cleaners. Hardware may loosen overtime. Periodically check that all connections are tight.