

- Be sure to read and understand all instruction sheets completely before beginning assembly or installation.
- All assembly and installation work must be performed by qualified personnel, in accordance with all applicable national and local building and electrical codes.
- Be aware that the weight of some fixtures may exceed the strength rating of the 4" electrical junction box or other such hardware at your site. In all cases, it is the responsibility of the contractor to properly secure the fixture to the structure, and to provide adequate support for the fixture.
- Due to constant production improvements, details of the design, material or finish may change in any way that will not significantly alter installed appearance or reduce function or performance.

© East Taunton, MA 02718 (508) 977-9991

1) Turn power off! Pull the wires out of the junction box and feed them through the center hole in the mounting plate.
Attach the mounting plate to the junction box with the screws provided so your fixture mounts vertically perpendicular to the ceiling.


2) Connect the light fixture wires to the wires in the junction box.

Wire black or brown to line voltage, white or blue to neutral, and attach the green or bare wire to the green ground screw provided on the mounting plate. Use wire nuts on the connections and leave no bare wire exposed (excepting the green). Tuck the wires inside the junction box.

3) Secure the light fixture to the mounting plate by lining up the holes on the decorative cover with the threaded holes on the mounting plate and screwing in the flat head screws provided. The fixture can be installed with the lamp above or below the decorative cover by spinning the fixture 180 degrees. Make sure to fasten securely.

4) Screw the lamp (by others) into the socket of your fixture. Lamps maximum diameter should not exceed 1 1/4" which is the size of the opening in the diffuser.

5) Thread the glass diffuser onto the socket. Beware the glass is fragile. Turn your power back on and you have completed the installation process.

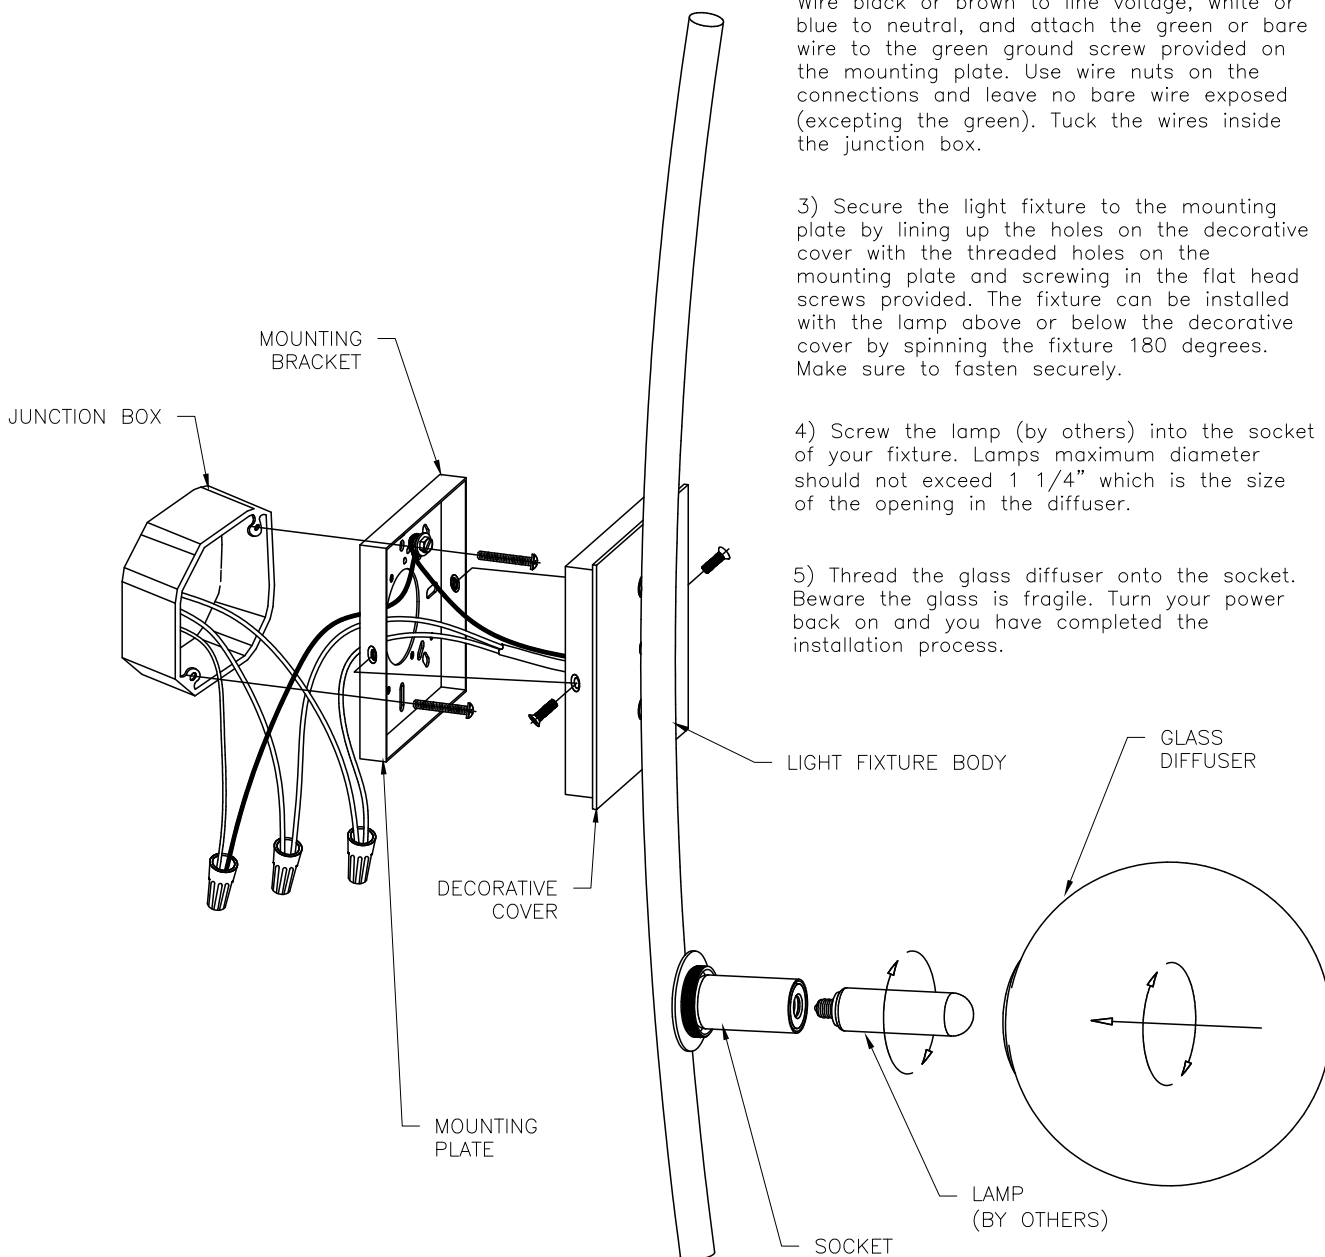


REV.	BY	DATE	DESCRIPTION
INSTRUCTIONS			DRAWN BY: GB SHEET #: 1 OF 1
PERCH SCONCE			DATE: 5/21/2019 DWG: 9681-A-INST

FILENAME: 9681-A-INST

- Be sure to read and understand all instruction sheets completely before beginning assembly or installation.
- All assembly and installation work must be performed by qualified personnel, in accordance with all applicable national and local building and electrical codes.
- Be aware that the weight of some fixtures may exceed the strength rating of the 4" electrical junction box or other such hardware at your site. In all cases, it is the responsibility of the contractor to properly secure the fixture to the structure, and to provide adequate support for the fixture.
- Due to constant production improvements, details of the design, material or finish may change in any way that will not significantly alter installed appearance or reduce function or performance.

© East Taunton, MA 02718 (508) 977-9991

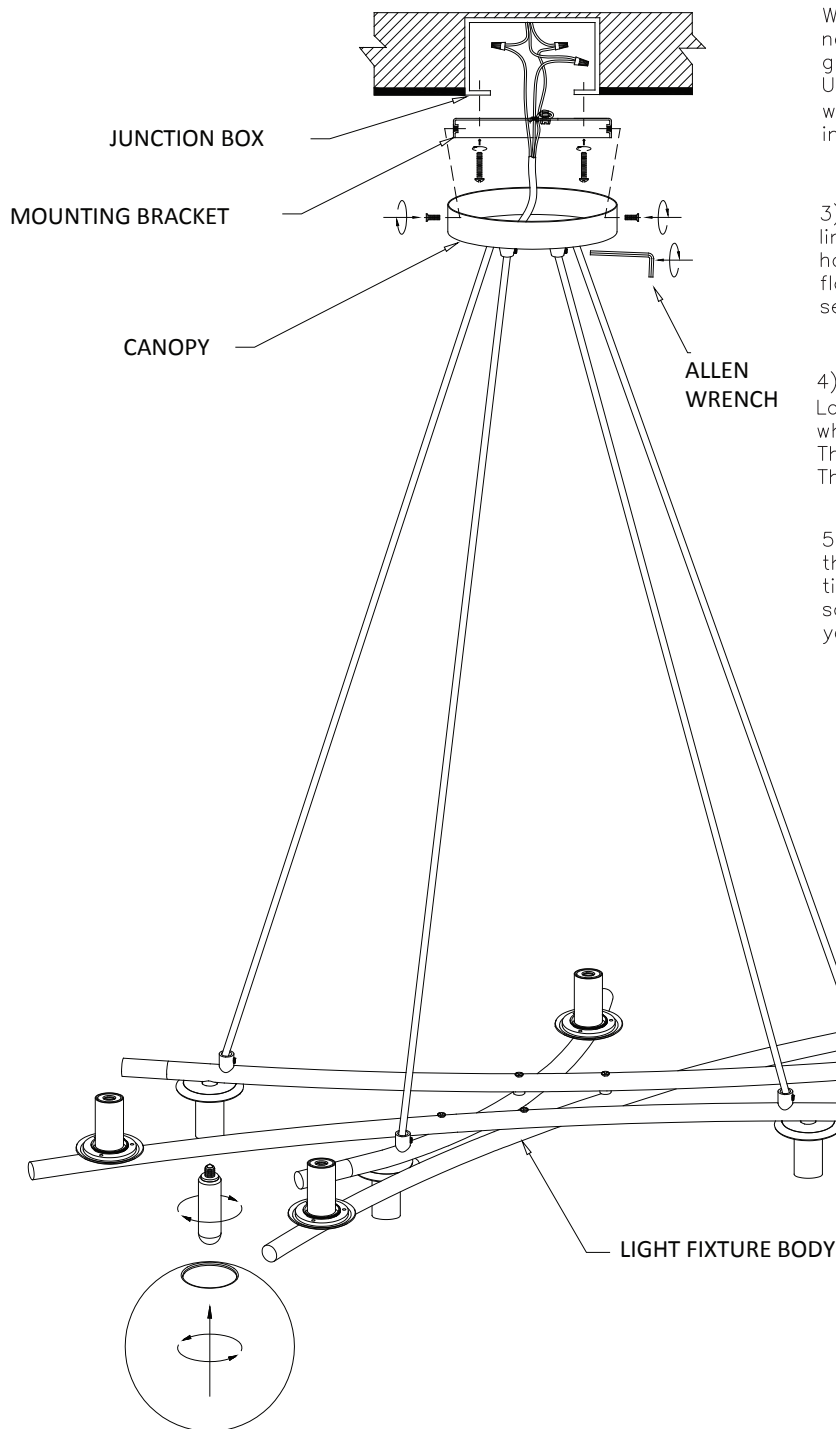

1) Turn power off! Pull the wires out of the junction box and feed them through the center hole in the mounting plate. Attach the mounting plate to the junction box with the screws provided.


2) Adjust the cords to approximate height by loosening the fitting on the canopy. Tighten the fitting when lengths are even and trim cords.

2) Connect the light fixture wires to the wires outside the junction box. Wire black or brown to line voltage, white or blue to neutral, and attach the green or bare wire to the green ground screw provided on the mounting plate. Use wire nuts on the connections and leave no bare wire exposed (excepting the green). Tuck the wires inside the junction box.

3) Secure the light fixture to the mounting plate by lining up the holes on the canopy with the threaded holes on the mounting plate and screwing in the flat head screws provided. Make sure to fasten securely.

4) Screw the lamps (by others) into the sockets. Lamps maximum diameter should not exceed 1 1/4" which is the size of the opening in the diffuser. Thread the glass diffusers onto the sockets carefully. The glass is fragile.

5) This is when you should fine tune the height of the fixture by loosening the canopy fitting one at a time and adjust the cords and tighten the fittings so the fixture is level. Turn your power back on and you have completed the installation process.

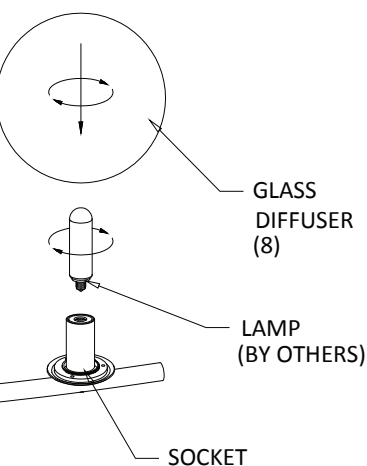

REV.	BY	DATE	DESCRIPTION
INSTRUCTIONS			DRAWN BY: GB SHEET #: 1 OF 1
PERCH CHANDELIER			DWG: 9680-A-INST
DATE: 5/21/2019			


FILENAME: 9680-A-INST

NORWELL

Éclairage et accessoires

Norwell Manufacturing Company, Inc. 82
Stevens Street / East Taunton, MA 02718 T
508-823-1751 / Service@Norwellinc.com

- Assurez-vous de lire et de comprendre toutes les fiches d'instructions avant de commencer l'assemblage ou l'installation.
 - Tous les travaux d'assemblage et d'installation doivent être effectués par du personnel qualifié, conformément à tous les codes électriques nationaux et locaux applicables du bâtiment. N'oubliez pas que le poids de certains luminaires peut dépasser la résistance nominale de la boîte de jonction électrique de 4 pouces ou tout autre votre site. Dans tous les cas, il est de la responsabilité de l'entrepreneur de bien fixer le luminaire à la structure et de fournir un support adéquat pour le luminaire.
 - En raison des améliorations constantes de la production, les détails de conception, de matériau ou de finition peuvent changer de quelque manière que ce soit, ce qui modifiera considérablement l'apparence de l'installation ou réduira la fonction ou les performances.
1. Éteindre! Tirez les fils hors de la boîte de jonction et faites-les passer par le trou central de la plaque de montage. Fixez la plaque de montage à la boîte de jonction avec les vis fournies afin que votre appareil se monte verticalement perpendiculairement au plafond.
 2. Ajustez les cordons à la hauteur approximative en desserrant le raccord sur la verrière. Serrez le raccord lorsque les longueurs sont égales et coupez les cordons.
 3. Fixez le luminaire à la plaque de montage en alignant les trous de la verrière avec les trous filetés de la plaque de montage et en vissant les vis à tête plate fournies. Assurez-vous de bien le fixer.
 4. Vissez les lampes (par d'autres) dans les douilles. Le diamètre maximum des lampes ne doit pas dépasser 1 ¼ "qui est la taille de l'ouverture dans le diffuseur. Enfilez soigneusement les diffuseurs en verre sur les douilles. Le verre est fragile.
 5. C'est à ce moment que vous devez affiner la hauteur du luminaire en desserrant le raccord de la verrière un par un, ajuster les cordons et serrer les raccords pour que le luminaire soit de niveau. Remettez votre appareil sous tension et vous avez terminé le processus d'installation.

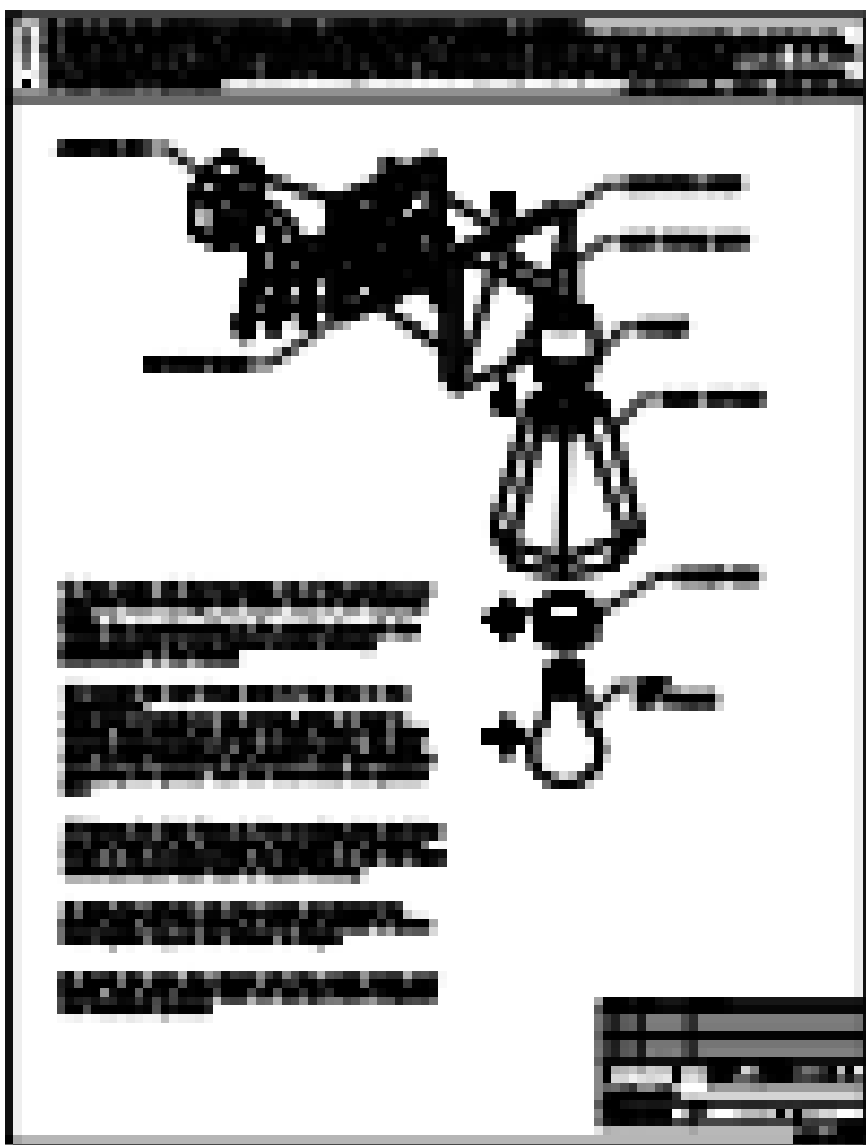

Pour nettoyer votre appareil, poussez légèrement avec un chiffon doux. N'UTILISEZ PAS d'abrasifs ou d'ammoniaque.


Norwell Manufacturing Company, Inc. - 82 Stevens Street East Taunton, MA 02718 - Tél: 508-823-1751 www.Norwellinc.com

NORWELL

Iluminación y accesorios

Norwell Manufacturing Company, Inc. 82
Stevens Street / East Taunton, MA 02718 T
508-823-1751 / Service@Norwellinc.com

- Asegúrese de leer y comprender todas las hojas de instrucciones antes de comenzar el montaje o la instalación.
- Todo el trabajo de montaje e instalación debe ser realizado por personal calificado, de acuerdo con todos los códigos eléctricos de construcción nacionales y locales aplicables. Tenga en cuenta que el peso de algunos accesorios puede exceder la resistencia nominal de la caja de conexiones eléctricas en 4 pulgadas u otro material en su sitio. En todos los casos, es responsabilidad del contratista asegurar adecuadamente la luminaria a la estructura y proporcionar un soporte adecuado para la luminaria.
- Debido a las constantes mejoras en la producción, los detalles de diseño, material o acabado pueden cambiar de cualquier forma que altere significativamente la apariencia de la instalación o reduzca la función o el rendimiento.
 1. ¡Apagar! Saque los cables de la caja de conexiones y páselos por el orificio central de la placa de montaje. Asegure la placa de montaje a la caja de conexiones con los tornillos provistos para que su dispositivo se monte verticalmente perpendicular al techo.
 2. Ajuste los cables a una altura aproximada aflojando el accesorio en el dosel. Apriete el accesorio cuando las longitudes sean uniformes y recorte los cordones.
 3. Asegure el artefacto de iluminación a la placa de montaje alineando los orificios del dosel con los orificios roscados de la placa de montaje y atornillando los tornillos de cabeza plana provistos. Asegúrese de sujetar de forma segura.
 4. Atornille las lámparas (de otros) en los enchufes. El diámetro máximo de las lámparas no debe exceder 1 ¼" que es el tamaño de la abertura en el difusor. Enrosque con cuidado los difusores de vidrio en los enchufes. El vidrio es frágil.
 5. Aquí es cuando debe ajustar la altura del accesorio aflojando el accesorio del dosel uno a la vez y ajuste los cables y apriete los accesorios para que el accesorio esté nivelado. Vuelva a encenderlo y habrá completado el proceso de instalación.

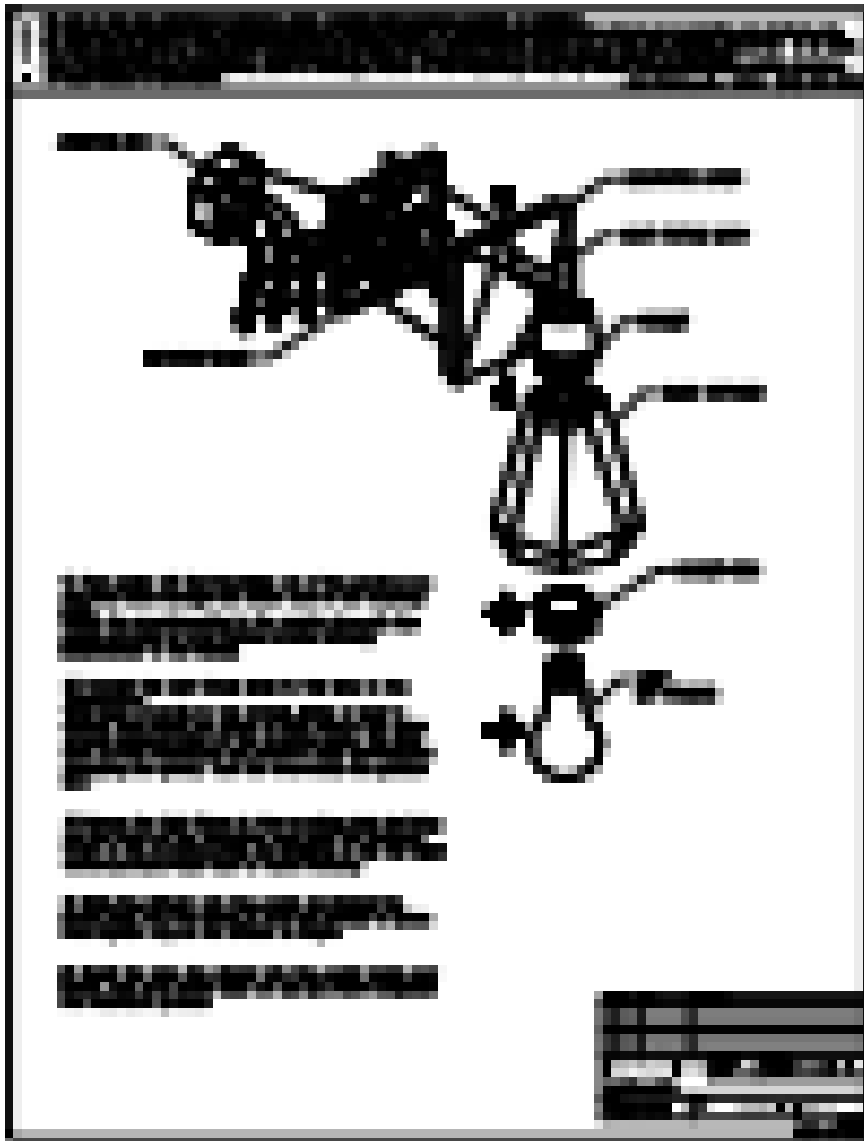

Para limpiar su dispositivo, presione ligeramente con un paño suave. NO use abrasivos ni amoníaco.

Norwell Manufacturing Company, Inc. - 82 Stevens Street East Taunton, MA 02718 - Tel: 508-823-1751 www.Norwellinc.com