

100.1170 | Floor Mounted Tub Filler With Hand Held Shower





SPECIFICATIONS:

- Solid Brass construction includes valve
- Floor Mount Installation
- Hand shower flow rate = 1.8 GPM @ 60 PSI w/ back flow prevention
- Diverter knob controls water flow between spout and hand held
- 9.0 GPM spout flow rate.
- Single Lever allows both volume and temperature control
- With swivel spout
- Includes anti-scald ring located on cartridge

STANDARDS:

• ASME A112.18.1 / CSA B125.1


Legislation Compliance








Technical Diagram

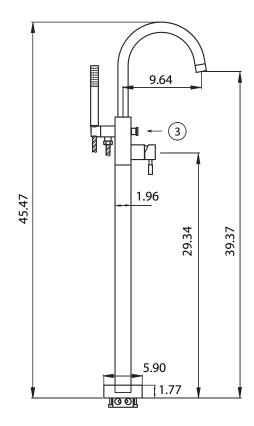



Part Number Guide:

- 1 Cartridge 100.1170-9853
- (2) Aerator 100.1170-2364
- (3) Push / Pull Diverter 100.1170-1991CP Chrome 100.1170-1991BN Brushed Nickel