
## Coastal Industries Inc.

FAX NO. (904) 641-1697


P.O BOX 16091 JACKSONVILLE, FLORIDA 32246 TELEPHONE NO. (904) 642-3970


## \*\*\* Paragon

Bi - Fold Door

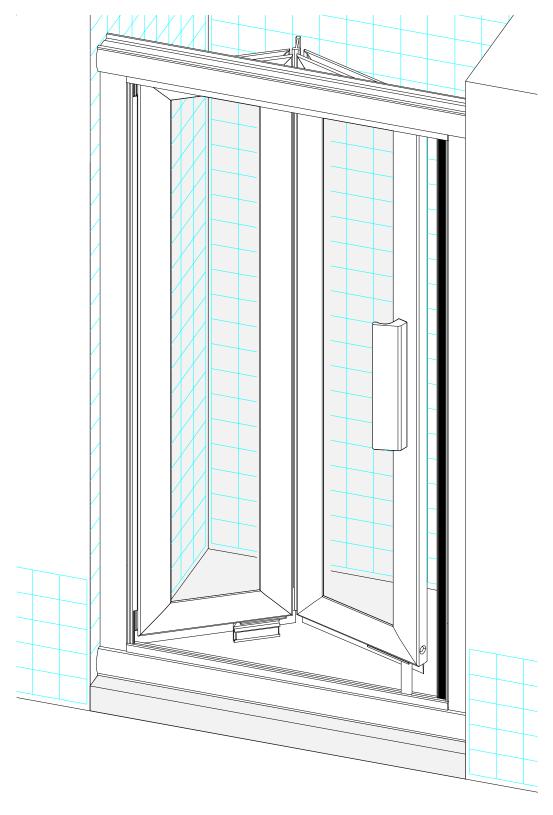

## **Paragon**

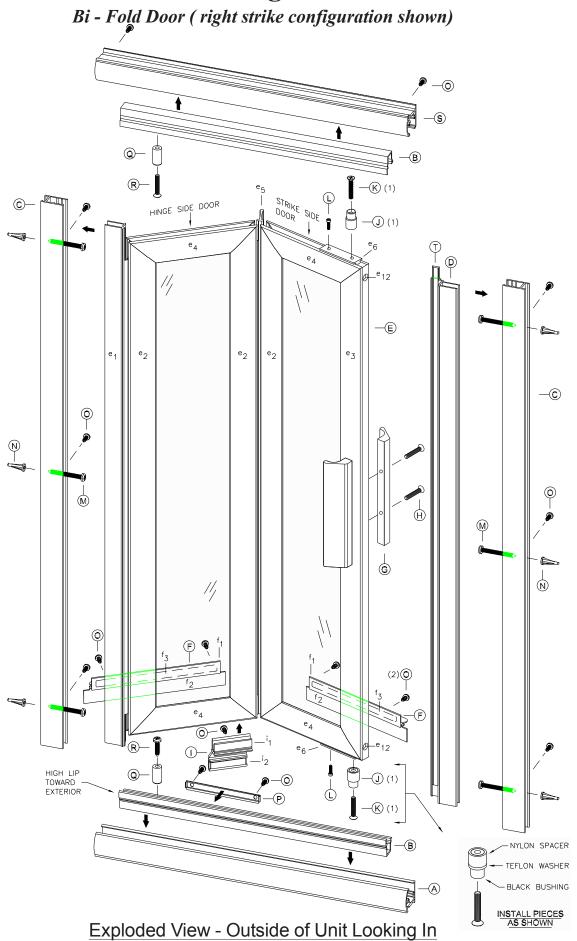

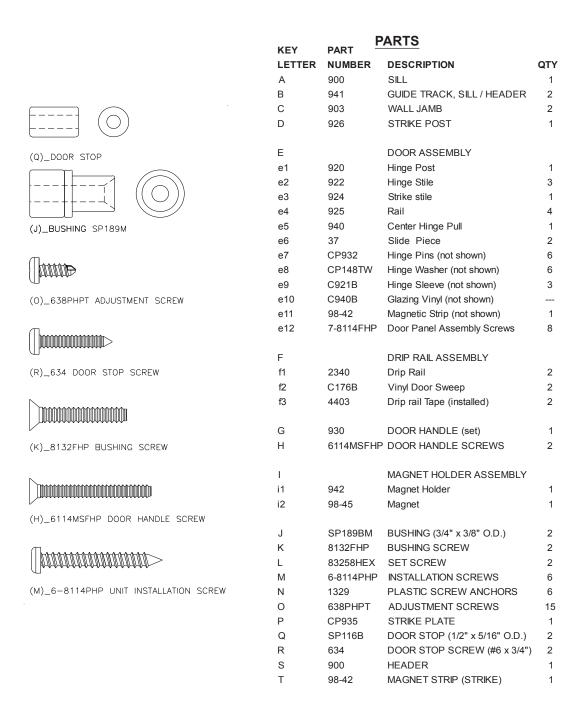

## INSTALLATION INSTRUCTIONS

- 1. Measure base opening along center of shower curb as shown in figure 1. Trim Sill (A) to 1/16" less than measurement obtained.
- **2.** With weep holes toward interior of enclosure, position Sill at center of shower curb. Temporarily tape Sill to shower curb to prevent movement.
- **3.** Place Wall Jambs (C) into ends of Sill (A) and up against shower walls as shown in figure 2. Plumb the Jambs, then pencil mark their installation holes locations on shower walls (3 per jamb). Remove Wall Jambs. Using a 3/16" masonry bit, drill 1" deep installation holes in locations previously marked. Insert Plastic Screw Anchors (N) into holes.
- **4.** Reposition Wall Jambs (C) as before and secure Jambs to walls using the six(6) 1-1/4" Installation Screws provided (3 per jamb).



figure 1







figure 2

**5.** Before proceeding, determine which side you want your door to strike (left or right, your choice). Now measure the opening width between the two Wall Jambs (C) as shown in figure 3 and trim **strike side end** of Sill Guide Track (B) to measurement obtained (**always trim the strike side end, never the hinge side end**). With Guide Track's high lip toward exterior, **snap** Track (B) into place as shown. See also exploded view - sheet 2.



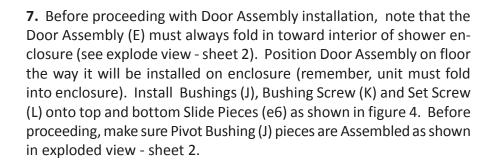



- **9.** Clean bottom rails of Door Assembly with alcohol to remove any oil. Failure to clean door rails prior to installation of Drip Rails (F) may cause tape to release. Remove backing from tape and position Drip Rails flush with edges of Hinge Stiles (e2) as shown in figure 6 and flush with bottom of Door as shown in figure 7. Secure Drip Rails to Door Panels using four 638phpt Screws (O) as shown in exploded view sheet 2 and figure 5.
- **10.** Insert the Door Assembly's Hinge Post (e1) into the Post from which it is to swing. Bring the Hinge Post to rest atop the Guide Track (B) and insert the Pivot Bushing (J) into the Guide Track cavity. Remember that regardless of whether the door strikes on the left side or the on the right side, the Door Assembly must always fold in toward interior of shower enclosure. Temporarily leave as is.
- **11.** Attach the Door Handles (G) to the door using two(2) Door Handle Screws (H) as shown in exploded view sheet 2.





figure 3



**figure 4**(figure shows parts installed for a right hand strike Door)




figure 5
(Snap Magnet Holder Assembly into bottom rail as shown, see also exploded view - sheet 2)







figure 6
(figure shows from inside of unit looking out)

**12.** Step inside the shower enclosure and close the Door. Check to make sure that bottom of Door Assembly (E) is parallel to the Sill (A). If it is not, make it so. When satisfied that the Door Assembly is parallel to the Sill, secure Hinge Post (e1) and Strike Post (D) to the Wall Jambs using six(6) 638PHPT Installation Screws (O) see exploded view - sheet 2.







Next measure the opening width **between the two Wall Jambs** (see figure 10) and trim remaining Track Guide (B) to 1/16" less than measurement obtained.

Center Track Guide and **snap** it into Header as shown in exploded view sheet 2. Place the Header / Track Guide over the Wall Jambs. Make sure that your top Nylon Bushing (J) is riding inside the track guide.

**16.** Run a bead of clear mildew resistant caulking down the full length of each Wall Jamb **outside** where the Jambs meet the Walls. Now run a bead **outside** where the Sill meets the curb. Follow caulking manufacturer's instructions before using shower (normally 24 hours). Installation is now complete.

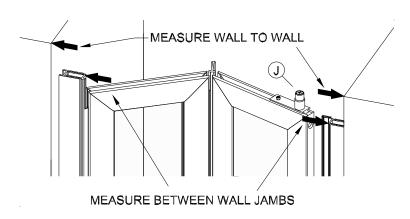


figure 10




figure 7




figure 8




figure 8a




figure 9