




160.1168 | Floor Mounted Tub Filler With Hand Held Shower

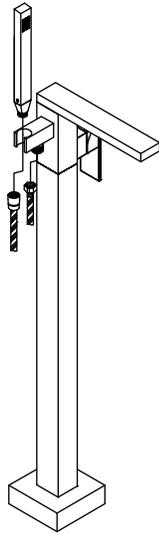

SPECIFICATIONS:

- Solid Brass construction - includes valve
- Floor Mount Installation
- Hand Shower Flow Rate = 2.0 GPM @ 60 PSI w/ back flow prevention
- Diverter knob controls water flow between spout and hand held
- 7.0 GPM Spout Flow Rate.

FAST SHIP FINISHES :

- Chrome - 160.1168CP, Brushed Nickel - 160.1168BN

STANDARDS:

- ASME A112.18.1 / CSA B125.1

Legislation Compliance



ZeroDrip Technology



Technical Diagram

