


Collection:Baxter Installation manual for:

LD2218BK D20. 9"H11. 8"L3

Installation instructions:

- 1. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 3. "E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 4. Secure mounting bracket to the junction box.
- 5.Insert screws(P2) in side of top unit the mounting bracket.
- 6. Fix the Mounting bracket(P1) to the Canopy and tighten by the nut(P5).
- 7. Fit lampshade(P14,P15,P16) with lampholder ring(P13).
- 8.Install the bulbs into the lamp fixture.(Bulb not included).

The end!

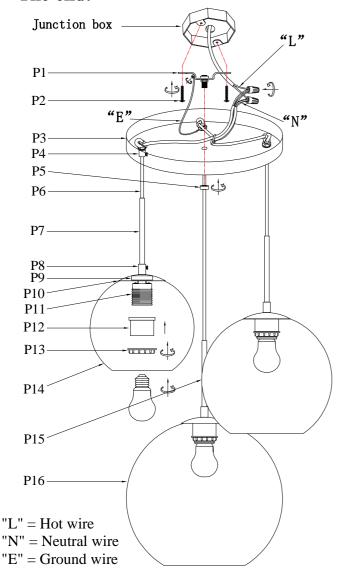

PARTS LIST

| part | picture | Description | Qty | Check list |
|------|------------------------|-----------------------------|-----|------------|
| P1 | | L4" Mounting bracket | 1 | |
| P2 | (Januarium | 5/32-32 Screw | 2 | |
| P3 | | Ø11.8″ Metal Canopy | 1 | |
| P4 | | Wire lock | 3 | |
| P5 | | M10 Flat nut | 1 | |
| P6 | ~ | Power Cord 79" 18# Black | 3 | |
| P7 | | L5.1" Metal Tube | 3 | |
| P8 | C | Wire lock | 3 | |
| Р9 | | ø1.6" Metal Cover | 3 | |
| P10 | | ø3.5″ Metal Cover | 3 | |
| P11 | | E26 Lampholder | 3 | |
| P12 | | ø2" Metal Tube | 3 | |
| P13 | 'UUU | E26 Lampholder Ring | 3 | |
| P14 | | ø7.9"Lampshade | 1 | |
| P15 | | ø9.8"Lampshade | 1 | |
| P16 | | ø11.8"Lampshade | 1 | |