


ASSEMBLY & INSTALLATION GUIDE

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

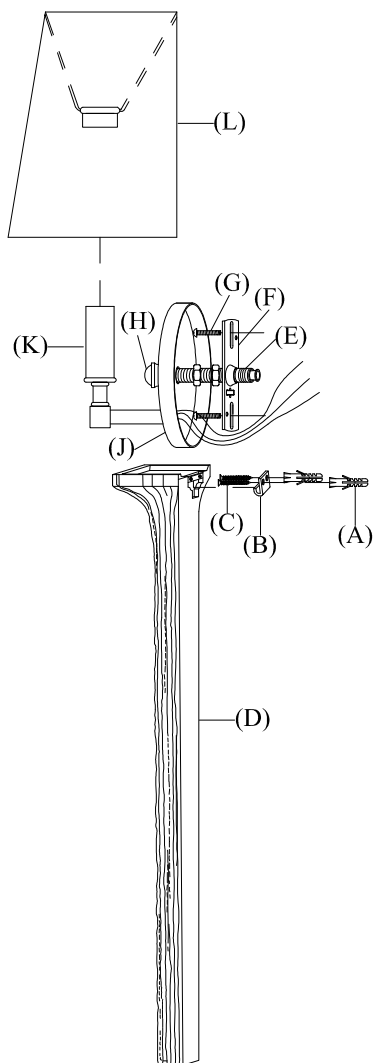

1. Remove all parts from the box.
2. Place metal tab (B) horizontally on the wall, use it as a template, mark center points for both mounting holes of metal tab (B) on the wall. Remove the mounting tab (B).
3. Drill small holes on the marked location, the holes should be big enough to accommodate with plastic anchors (A). Push plastic anchors (A) into the holes.
4. Affix the mounting tab (B) to the wall by aligning mounting holes with center holes of plastic anchors (A), inserting mounting screws (C) to secure mounting tab (B) to the wall.
5. Hook the stand (D) to the mounting tab (B). (See right illustration)
6. Place lamp base (J) on top surface of support (D).
7. Attach mounting strap (F) to wall outlet box and secure with mounting screws (G).
8. Insert top thread nipple (E) in mounting strap (F).
9. Attach ground (green) wire to ground wire from wall outlet box (usually green or copper in color), fasten together with a plastic wire connector. Tightly wrap the wire connector with electrical tape so the end of the connector is sealed. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
10. Connect neutral (white) fixture wire coming from fixture base to neutral (usually both wires together with a plastic white) outlet wire. Fasten wire connector and tightly wrap the wire connector with electrical tape.
11. Repeat the procedure with the hot (black) wires. Always make sure that no wire strands are left outside the connectors. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.
12. Attach assembly part (J) through the nipple (E), and secure the cap nut (H) to secure the assembly part (J) to the wall.
13. Insert light bulb into the socket (K).
14. Clip lamp shade (L) onto bulb.