

LED Product Information and Warnings

Important

- **Always disconnect the power before installing or replacing bulbs and before cleaning or other maintenance.**
- **Consult a qualified, licensed electrician to ensure correct branch circuit conductor.**
- Please read all included assembly instructions and warnings carefully before installation. Contact Customer Service if you have any questions or concerns. Before installation, please confirm that the fixture is compatible with your supply voltage and dimming system, if present.
- LEDs are highly sensitive electronic devices, and must be treated with care. Do not open any factory sealed compartments, and avoid touching the LEDs with your hands or any object.
- Although all our fixtures are equipped with protective devices, LED fixtures are vulnerable to power surges and supply variations. Do not install LED fixtures on the same circuit as any motors, appliances, or HVAC systems.
- Do not remove or bypass any LED Driver or Transformer that is provided with the fixture, and do not replace or substitute with another power supply.
- Remote LED Driver or Transformer installation must be done by a licensed electrician and in accordance with local codes. Remote installations should be in an accessible location, as close to the fixture as possible.
- Fixtures must be wired in parallel on independent leads; do not "daisy chain" multiple fixtures together or wire them in series.
- All factory-made splices and connections must remain intact. LED circuits are carefully designed and built, and improper connections may damage the fixture.
- The ends of coaxial pendant cords have been precisely stripped and split at the factory and must not be field cut. Excess cord or cable should be neatly coiled and reserved in the fixture canopy.
- Any mounting hardware is provided for your convenience and should be used with discretion. Always use the appropriate hardware for the mounting surface.

December 29, 2017

Assembly Instructions

3066, 3067, 3068



INSTRUCTIONS D'INSTALLATION

ALC Series - 3" Small LED Conduit Mount, 3" Medium LED Conduit Mount, 3" Tall LED Conduit Mount

Important

- Always disconnect the power before installing or replacing bulbs and before cleaning or other maintenance.
- Consult a qualified, licensed electrician to ensure correct branch circuit conductor.
Consulter un électricien qualifié pour vous assurer que les conducteurs de la dérivation sont adéquats.

1. Shut off power to branch circuit conductors.
2. Cut a 2" hole (A) in the ceiling and bring the 120V branch circuit conductors (B) through the ceiling. Attach the branch circuit conductors to the knock-out on the mounting plate (C) using an appropriate connector (not included).
3. Attach the mounting plate (C) to the ceiling by folding tabs (D) inward, and pushing the mounting plate into the hole (A) until it is flush against the ceiling. Use a screw driver to swing the tabs out above the ceiling and tighten to secure.
4. Make appropriate electrical connections using wire nuts:
 - a. Connect the fixture's (E) live wire (black) to the live branch circuit conductor wire.
 - b. Connect the fixture's neutral wire (white) to the neutral branch circuit conductor wire.
 - c. Connect the fixture's ground wire (green or uncoated) to the ground branch circuit conductor wire.
 - d. Carefully place connections in the fixture body.
5. Install the fixture (E) to the mounting plate (C) and secure with set screws (F) using the provided Allen key (G).
6. Install lens (H) into the fixture (E) and secure by screwing trim (J) into the fixture.
7. Restore power to the fixture.

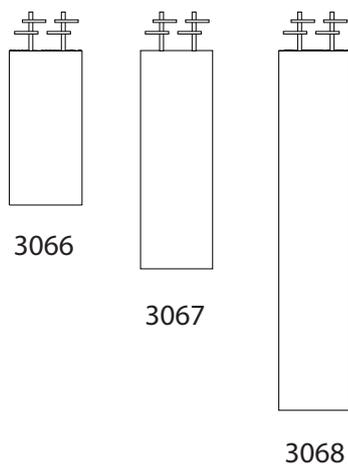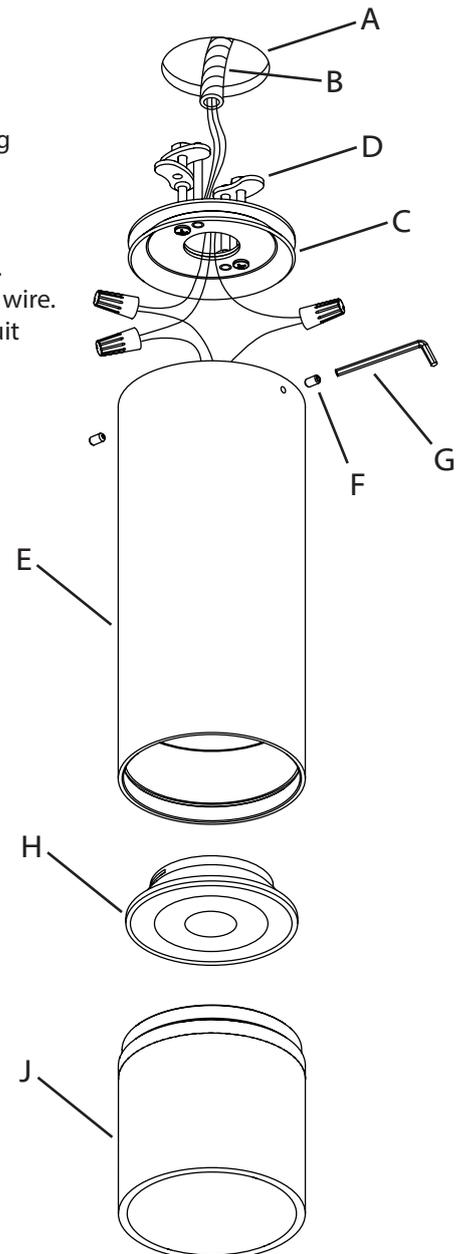

Note

- This fixture is dimmable with Electronic Low Voltage (Trailing-Edge) type dimmers and Incandescent (Leading-Edge) type dimmers. For best performance, we recommend using an Electronic Low Voltage Dimmer.

Care Instructions

- **Dusting:** Use a clean, dry cloth.
- **Cleaning:** To protect the finish, avoid any harsh abrasives or chemicals.