

Installation manual for:

2039G42C

2039G42G

Dimensions:W42" H60" L59

Collection:Maxime

Bulb Type:E12 bulb not included

Lamp Frame Weight(lbs):40

Total Weight(lbs):59



Thank you for choosing our product(s).

Our Company is actively involved in every step of the production.


Our product(s) are designed to be utilized for every application that graces your home or business.

We pride ourselves in providing the most prompt and courtesy service to all of the valued customers.

Please find the enclosed detailed instruction and read carefully for proper installation.

If you have any questions, our professional customer service team is committed to assisting you, please call our toll free HOTLINE AT:

1-888-388-3390



SAFETY

Warning: MAKE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF. BY EITHER REMOVING THE FUSE OR TURNING OFF THE CIRCUIT BREAKER.


CAUTION

- Before assembling the lighting fixture, please read all instructions carefully.
- All frame & crystal components are fragile, please handle with care.
- Required supply circuit : 110 - 130V/60Hz
- Labeled wires are "L" for live wire, "N" for neutral wire, "E" for ground wire.
- Never install fixture on damp ceiling, the room should be dry and well ventilated
- All electrical components must be installed by a licensed electrician and in accordance with the National Electrical Code and the appropriate local electrical codes.

Unpack the Package

Please open the box carefully and check all the items are inside the box. If you have any installation, assembling and missing parts questions, please call our Customer Service department at 1-888-388-3390. Please have model number(at the front page), where you purchase from and any other relevant information ready, our customer service team will provide comprehensive and worry free service to our valued customers.

Frame Parts List

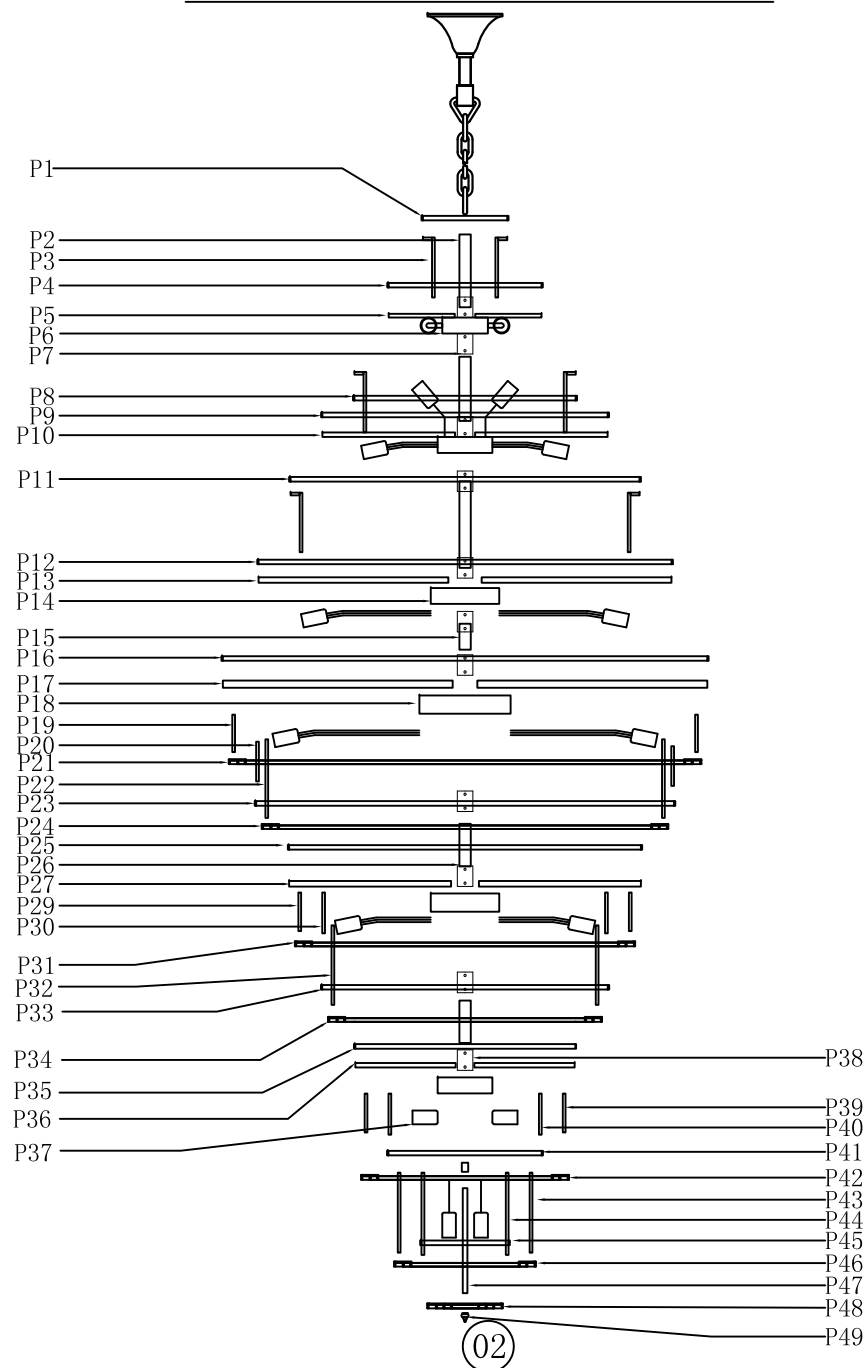
























Step 1













Please use the parts list to ensure you are not missing any parts













2039G42











PARTS LIST

part	picture	Description	Qty	Check list
ZA		4"Crossbar	1	
ZB		7"Canopy ceiling	1	
ZC		Canopy ring	1	
ZD		ROD1025	1	
ZE		L59"Chain08P Plain Design	1	
ZF		Power Cord 12' SPT-2-18# Clear/Gold	1	
P1		7.4"Metal ring	1	
P2		4.3"Threaded pipe	1	
P3		5.1"Iron bracket	12	
P4		13.3"Metal ring	1	
P5		5.7"Iron bracket	4	

part	picture	Description	Qty	Check list
P6		4"Cable house	2	
P7		7.5"Threaded pipe	2	
P8		19.3"Metal ring	1	
P9		24.8"Metal ring	1	
P10		11.4"Iron bracket	4	
P11		30.3"Metal ring	1	
P12		35.8"Metal ring	1	
P13		16.3"Iron bracket	6	
P14		6"Cable house	2	
P15		2.3"Threaded pipe	1	
P16		42"Metal ring	1	
P17		20"Iron bracket	6	

part	picture	Description	Qty	Check list
P18		7.8"Cable house	1	
P19		3.2"Iron bracket	6	
P20		3.5"Iron bracket	6	
P21		40.6"bottom	1	
P22		6.8"Iron bracket	6	
P23		36"Metal ring	1	
P24		35"bottom	1	
P25		30.5"Metal ring	1	
P26		3.7"Threaded pipe	2	
P27		14"Iron bracket	4	
P29		3.3"Iron bracket	4	
P30		3.5"Iron bracket	4	


part	picture	Description	Qty	Check list
P31		29"bottom	1	
P32		7"Iron bracket	4	
P33		24.8"Metal ring	1	
P34		23.6"bottom	1	
P35		19.3"Metal ring	1	
P36		8.6"Iron bracket	4	
P37		Socket	38	
P38		Connector	12	
P39		3.3"Iron bracket	4	
P40		3.5"Iron bracket	4	
P41		13.4"Metal ring	1	
P42		17.8"bottom	1	

part	picture	Description	Qty	Check list
P43		6.8" Iron bracket	4	
P44		7" Iron bracket	4	
P45		7.8" Metal ring	1	
P46		12.2" bottom	1	
P47		9" Threaded pipe	1	
P48		6.5" bottom	1	
P48		Finial	1	
A		2020-22#*4	932	
B		attached with lamp body 14#	2203	
C		701-40#	1	

part	picture	Description	Qty	Check list

step 2

Canopy Installation Instruction

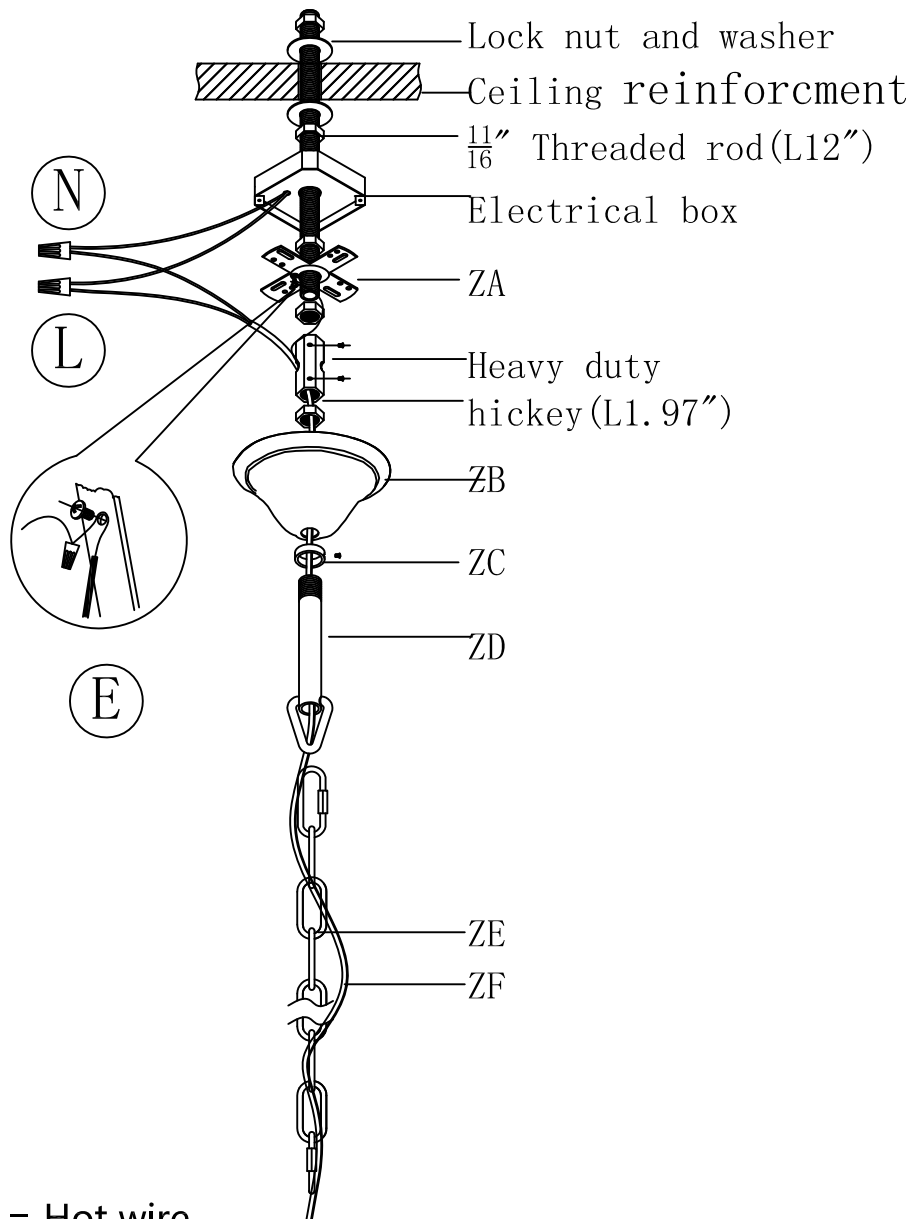

"L" = Hot wire


"N" = Neutral wire

"E" = Ground wire

IMPORTANT: Test sockets with bulb before dressing the fixture.

- 1 .Drill a $\phi 0.7$ " hole in the ceiling reinforcement to allow a $1\frac{1}{16}$ " threaded rod to pass through.
- 2 .Attach the electrical box to the ceiling reinforcement and pass the $1\frac{1}{16}$ threaded rod through the box and secure it to the heavy duty hickey.
- 3 .Pass the fixture wires and ground wire through the loop, canopy ring, center hole of canopy and the heavy duty hickey.
- 4 .Pull ceiling wires down through the fixture box and make connection.
- 5 .Screw loop only onto threaded pipe.
- 6 .Hang the fixture on chain.
- 7 .Secure the canopy with canopy ring.

Frame Assembly Diagram

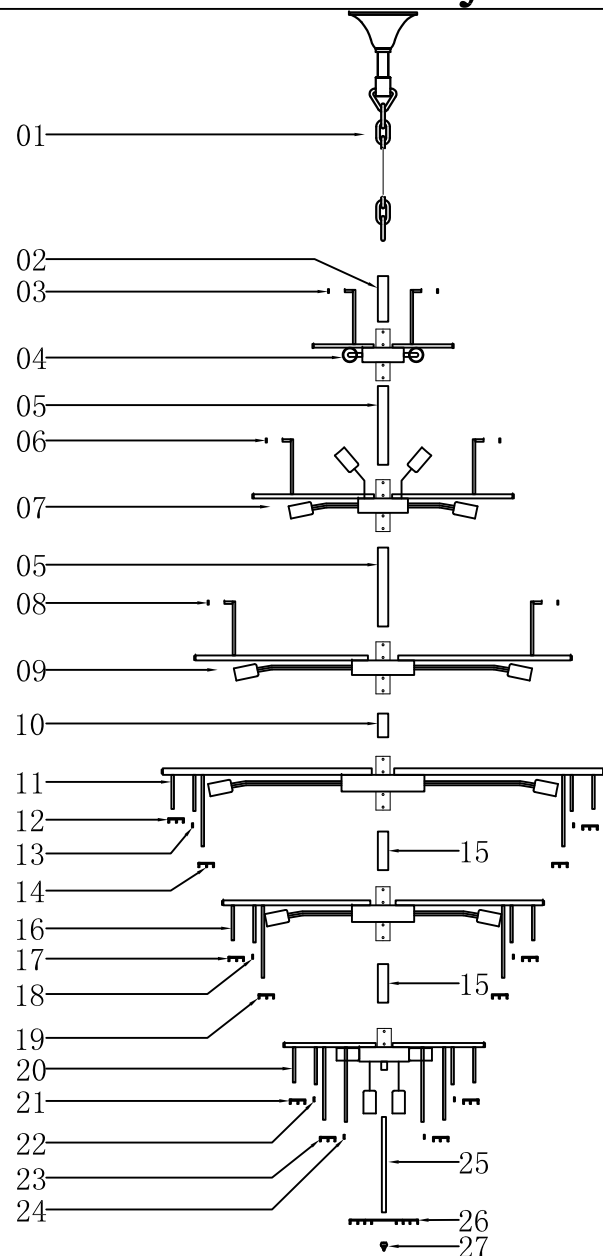

(11)

Step 3

Frame Assembly Instructions

Installation:

Please read all instructions carefully.

Before you proceed to install, make sure

that the power supply is turned off and remains off until installation is complete.

Please note that each part has been assigned a number.

Please proceed in a numerical order.

1. Hang the chain (01) on the ceiling.
2. Install ring (03) (06) (08) on the lamp body (04) (07) (09).
3. Install frame (12) (14), ring (13), frame (17) (19), ring (18), frame (21) (23), ring (22) (24) on the lamp body (11) (16) (20).
4. Screw threaded pipe 4.3" (02) on the lamp body (04), screw it well with lamp body (04), screw them well with chain (01).
5. Screw threaded pipe 7.5" (05) on the lamp body (04), (07), make sure the electric main pass through the threaded pipe, and connect the main wire of lamp body and with junction caps, screw threaded pipe well with lamp body (07), (09).
6. Screw threaded pipe 2.4" (10) on the lamp body (09), make sure the electric main pass through the threaded pipe, and connect the main wire of lamp body and with junction caps, screw threaded pipe well with lamp body (11).
7. Screw threaded pipe 3.7" (15) on the lamp body (11), (16), make sure the electric main pass through the threaded pipe, and connect the main wire of lamp body and with junction caps, screw threaded pipe well with lamp body (16), (20).
8. Screw threaded pipe 9" (25) on the lamp body (20), then through the frame (26), screw it well with bottom lock (27).
9. Connect the lamp longer main wire with positive and negative of 4" junction (J-box).
10. Hang the all lamp on the chain (01).
11. As the crystal dressing instruction, hang the crystal parts.

The end!

(12)


Step 4 Crystal Dressing Instructions

1. "B" part attached to the lamp body.
2. Hang crystal "A", "C".

Crystal Dressing Diagram



When dressing the chandelier with the crystals please remember to wear either rubber or cotton gloves. So as to prevent any damage or smudging on the crystals.

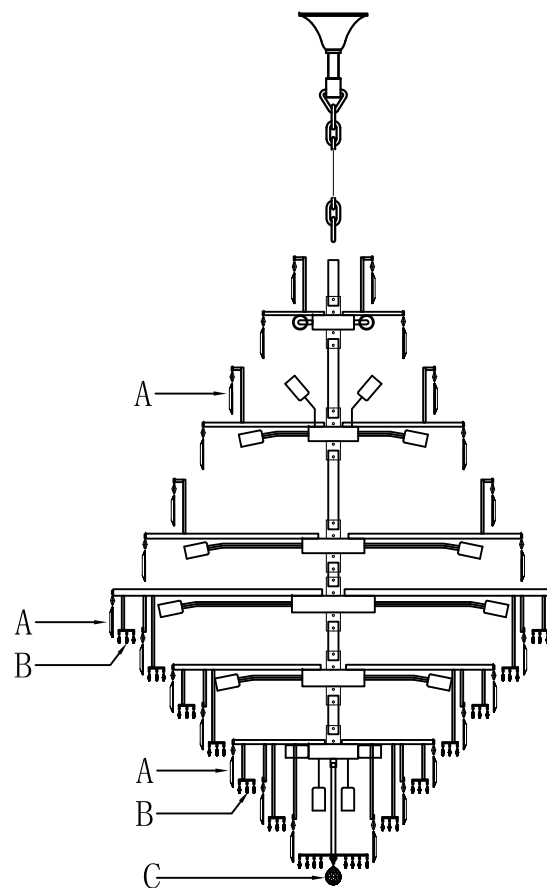

Congratulations !

You are now done installing your Elegant Lighting fixture. Sit back and admire each crystal as it will become the statement piece for your room/house.

If you require any additional assistance, please contact us at 1-888-388-3390.

Thank you.

Cleaning and Maintenance of Chandelier Frame

The finish on our chandelier frames and fixture frames is protected by a durable coating of lacquer. To clean, use a clean, soft, dry cloth. Do not use any metal polishes, cleaners, abrasives or any substance which could remove the protective finish. Failure to follow these instructions automatically voids the guarantee.

Cleaning and Maintenance of Crystals

Wet a soft cotton fabric in clean warm water and wipe gently, then polish with a dry soft cotton fabric.

To Order Crystal Replacement Parts

Should you require replacement crystals or pins (the metal connectors attaching the crystals), contact the store where the product was purchased or contact us at the address shown on the reverse side. For ease of ordering, you may use the original crystal trimming instructions provided with this product and circle the items you wish to order, indicating the quantity by writing the number needed adjacent to the circle and faxing it to our customer service department at 215-423-8882. You will be contacted with prices prior to shipment. All orders must be pre-paid.

Elegant Lighting Warranty

The finish and frame of your new chandelier or fixture are warranted for a period of two(2) years from the date of purchase. Our company will at its option, repair or replace any frame that has a defect in the material or workmanship during the warranty period. All crystals are guaranteed for their original quality during the life of the chandelier. Breakage is not covered by this warranty.

To make a claim under this warranty, contact our customer service department at the address and phone number shown below. A written return authorization form will be sent to you with specific instructions.

CUSTOMER SERVICE DEPARTMENT

500-550 E. Erie Avenue

Philadelphia, PA 19134

Tel: 215-423-8880

Fax: 215-423-8882

Returns and Conditions of Warranty

Returns must be pre-authorized by contacting our customer service department at the address on the reverse side. Returns will only be accepted with a written return merchandise authorization and return shipping charges pre-paid. We reserve the right to inspect all returned merchandise to fully determine the nature of any defect. This guarantee shall not apply to any product that has been changed, altered or otherwise modified, nor shall it apply to any product that has been repaired or altered by anyone other than a pre-authorized facility. We will not be responsible for any breakage or damages incurred during transit, nor for crystal parts or metal frame part that have been subject to misuse, negligence, accident or inappropriate handling. Also, we will not be held responsible for damage incurred during improper installation or wiring by others, nor for damages resulting from a failure to follow the recommended maintenance or installation procedures. This guarantee is issued in lieu of any and all other guaranteed or warranty, whether written or implied and any and all other obligations or liabilities. Further, we neither authorize nor permit any other person or firm to assume for us, any liability in connection with the sale of our products.