


Assembly Instructions: 2074-M1L (Smyth)

IMPORTANT:

- ALL INSTALLATION WORK SHOULD BE DONE BY ACCREDITED PROFESSIONAL.
- SHUT OFF POWER SUPPLY AT FUSE OR CIRCUIT BREAKER!
- USE ONLY THE SPECIFIED BULBS. DO NOT EXCEED THE MAXIMUM WATTAGE!

For Customer Service, contact the place of purchase.

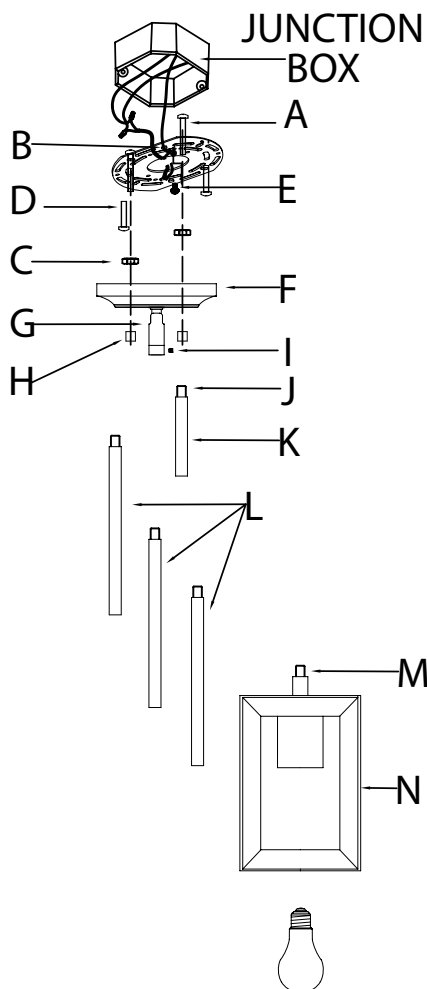

PREPARING FOR INSTALLATION

Remove all of the contents from the carton. See the important notes above. Remove the old fixture from the ceiling, including the old mounting strap.

1. Take the mounting strap assembly from the parts bag. Mounting strap (B) contains threaded holes. Two of mounting screws (A) should be attached to mounting strap (B). You may need to tighten nuts (C) that hold these screws in place.

2. Place mounting strap (B) over the junction box so that mounting screws (A) are vertical, and in alignment with the hole locations on the fixture's canopy (F). Secure mounting strap (B) to the junction box with mounting screws (D) and a screwdriver. Tighten the screws securely.

ASSEMBLING THE FIXTURE

3. Measure to determine the correct number of rods needed for hanging. Rods (L and K) are on the fixture's wires. By measuring, determine the correct number of rods needed for proper hanging height. There are 3 optional 12 inch rods (L) and one 6 inch rod (K) included. You must use at least one 12 inch rod or one 6 inch rod.

4. To shorten the fixture, trim the wires to the desired length adding at least 8 to 10 inches of wire to the desired length. Slide any excess rods off the fixture's wires to discard. To lengthen the fixture, add additional rods. If additional rods are needed, contact the place of purchase to order.

5. Thread the fixture's wires through the rods and pull the wires until taut before threading the rods together.

6. Thread bottom rod (L or K) onto post (M) at the top of the fixture's body. Twist top rod (L or K) into the threads of swivel post (G) of canopy (F).

7. Lock the rod in place by twisting screw (I). Pull the fixture's wires through the swivel and the top of canopy (F).

CONNECTING THE WIRES

8. Have an assistant support the fixture's weight while completing the wiring. Cut away the excess wires. Refer to the wiring diagram and attach the fixture's wires to the power supply wires from the junction box. Connect Hot to Hot, Neutral to Neutral, and Ground to Ground. Twist the ends of the wire pairs together, and then twist on a wire connector. Make sure all twists are in the same direction. If there is no house ground wire coming from the junction box, locate ground screw (E) on the mounting bracket/mounting strap and wrap the fixture's ground wire around the ground screw. Use a screwdriver to tighten the top of ground screw (E) onto the wires and into the mounting bracket/mounting strap. Tuck the wires into the junction box.

FINISHING THE INSTALLATION


9. Push canopy (F) up to the ceiling and tightly thread nuts (H) onto the exposed threads mounting screws (A).

10. Install a light bulb in accordance with the fixture's specifications. Do not exceed the maximum recommended wattage.

Your installation is complete. Turn on the power and test the fixture.

How to Identify the Fixture's Wires

| Hot | Neutral | Ground |
|--------------------|--------------------|-----------------------|
| Smooth | Ribbed | Bare Metal, Green, or |
| Black | White | Green Inner Thread |
| Black Inner Thread | White Inner Thread | |

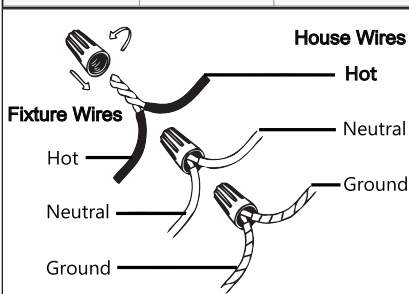

CLEANING TIPS

Treat the fixture gently! Regular cleaning will reduce the need for deep cleaning. For regular cleaning, turn off the light and wipe down the fixture with a clean lint-free cotton or microfiber cloth. Never spray cleaner directly onto the fixture.