# **KOHLER**

#### Features

- Elongated bowl.
- 1.6 gpf (6.1 lpf).
- Left-hand trip lever.
- 2-1/8" (54 mm) glazed trapway.
- 28-3/4" (730 mm) x 17-5/8" (447 mm) x 30-3/4" (781 mm).

### Material

• Vitreous china.

# Technology

AquaPiston<sup>®</sup> flushing system.

#### Recommended Accessories

K-4636 Cachet® Quiet-Close™ Elongated Toilet Seat K-5588 Purefresh® Elongated Toilet Seat K-4108 C3®-230 Elongated Cleansing Toilet Seat K-5420 Low-Profile Bolt Caps K-9466-L Left-Hand Trip Lever K-9470-L Left-Hand Trip Lever 1023457 Wax Ring/Hardware Kit 1265114 Connector Hose

# Components

Product includes: K-4309 Elongated Toilet Bowl

K-4418 Toilet Tank

Additional included component/s: Tank cover, Trip lever, Tank accessory pack, and Bolt cap accessory pack.



ADA CSA B651 OBC

### **Codes/Standards**

ASME A112.19.2/CSA B45.1 ADA ICC/ANSI A117.1 CSA B651 OBC

# KOHLER<sup>®</sup> One-Year Limited Warranty

See website for detailed warranty information.

# Available Color/Finishes

Color tiles intended for reference only.

#### **Color Code Description**

0	White
96	Biscuit

- 47 Almond
- NY Dune
- Ice<sup>™</sup> Grey 95
- G9 Sandbar
- 7 Black Black<sup>™</sup>




# Cimarron® Comfort Height® Toilet K-3589

# **KOHLER**<sub>®</sub>

# Cimarron®

Comfort Height® Toilet K-3589

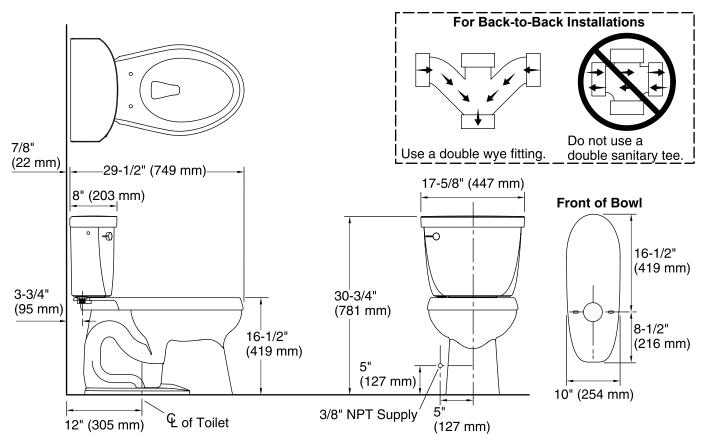

### **Technical Information**

All product dimensions are nominal.	
Toilet type:	Two-piece, Floor-mount
Bowl shape:	Elongated front
Flush type:	AquaPiston®
Trap passageway:	2-1/8" (54 mm)
Water Consumption	
Full:	1.6 gpf (6 lpf)
Water surface size:	10-1/2" x 7-1/8" (267 mm x 181 mm)
Rim to water surface:	6-1/8" (156 mm)
Rough-in:	12
Seat-mounting holes:	5-1/2" (140 mm)

#### Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a  $45^{\circ}$  double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.

