

Thank you for purchasing a KOUBOO Rattan Lighting Product, we hope that it's perpetual design will create an enjoyable and serene atmosphere around your home. In its natural state, Rattan is delicate and maybe brittle, to avoid breakage, handle Rattan carefully.



**CAUTION:** BEFORE INSTALLING FIXTURE, MAKE SURE THE POWER TO THE CIRCUIT IS TURNED OFF AT THE MAIN FUSE BOX / CIRCUIT BREAKER UTILITY BOX.

**1050126**

## **Spiral Rattan Coiled Pendant**

### **Important Safety Instructions:**


- These instructions are provided for your safety. It is very important that they are read carefully and completely before beginning the installation of this lighting fixture.
- We strongly recommend that a professional electrician install all direct wire fixtures.
- **THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODES BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.**
- The lighting fixture is meant for indoor use. It must be connected only to 3-wire, single-phase electrical supply systems(provided with Ground wire or equivalent protection system).
- For your safety, it is recommended that two people install and hang the lighting fixture.
- Light bulb should be centered inside the chandelier shade. Making sure it does not touch the shade sides.
- This fixture has been rated up to (2) **60- watt maximum TYPE A** standard incandescent light bulbs (not included). To avoid the risk of fire, do not exceed the recommended wattage.
- The lighting fixture is for indoor use, **DRY LOCATION ONLY.**
- **Save these instructions.**

### **Pre-assembly:**

- Remove all parts and hardware from box along with any plastic protective packaging.
- Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.

### **INSTALLATION INSTRUCTION:**

- 1. SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER!**
2. Carefully unpack all fixture parts and hardware and lay out on a clear workspace.
3. Separate Crossbar (B) from Canopy (E) by removing the two Small Screws (G) and two Small Washers (F). Do not discard Small Screws (G) and Small Washers (F) as these will be used later.
4. Gently pull existing wiring from ceiling junction box and allow it to hang.
5. Carefully inspect the light fixture's wires. The NEUTRAL FIXTURE WIRE is white. The HOT FIXTURE WIRE is black, and the GROUND WIRE is Green.
6. Attach the GROUND WIRE from the fixture to the GROUND JUNCTION BOX WIRE from the outlet junction box (J-box) (usually green insulation or bare wire). Fasten each together with a Plastic Wire Connector (D) by twisting the connector in clockwise direction and wrap the connection with electrical tape. Be sure no wire strands are exposed. If your outlet box **DOES NOT** have a GROUND WIRE, be sure to insert the Green Ground Screw (A) into the Crossbar (B) marked as "GND", and wrap the fixture's bare ground wire around the Green Ground Screw (A) .**IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.**
7. Connect the NEUTRAL FIXTURE WIRE to the NEUTRAL JUNCTION BOX WIRE (usually white insulation), twisting wire ends clockwise. Fasten each together with a Plastic Wire Connector (D) by twisting the connector in clockwise direction and wrap the connection with electrical tape. Be sure no wire strands are exposed.
8. Connect the HOT FIXTURE WIRE to the HOT JUNCTION BOX WIRE (usually black insulation), twisting wire ends clockwise. Fasten each together with a Plastic Wire Connector (D) by twisting the connector in clockwise direction and wrap the connection with electrical tape. Be sure no wire strands are exposed. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
9. Gently tuck the wire connections neatly into the ceiling junction box.
10. Attach the Crossbar (B) to the ceiling outlet box using the J-box mounting screws (C). Tighten screws with a screwdriver.
11. Pull the Canopy (E) to the Crossbar (B) , aligning the holes in the of Crossbar (B) with the holes on the side of the Canopy (E). Insert the two small screws(G) and two small washers(F)and tighten with a screwdriver.
12. Insert (2) 60-watt maximum Type A bulbs(J) (not included) to the Socket(H).
13. Restore power to junction box and test fixture.
14. Installation is complete.

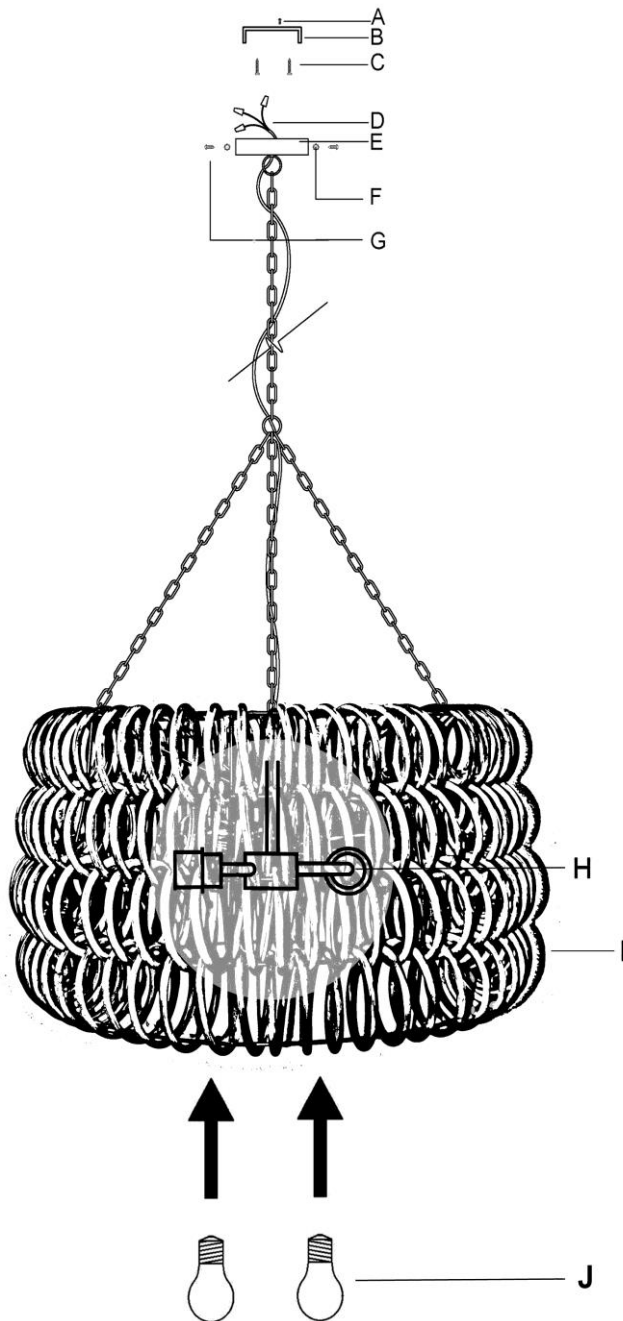

#### Parts and Hardware Included:

- (A) Ground screw (1 pc)
- (B) Crossbar (1 pc)
- (C) J-box mounting screws (2 pcs)
- (D) Plastic wire connectors (3 pcs)
- (E) Canopy (1 pc)
- (F) Small washers (2 pcs)
- (G) Small Screws (2 pcs)
- (H) Sockets (2 pcs)
- (I) Chandelier Fixture (1 pc)
- (J) Bulbs (2 pcs) (not included)

#### Tools Required (not included):

Step Ladder, Electrical Tape, Philips Head Screwdriver & Wire Cutter / Stripper.

#### **WARNING:**

- To reduce the risk of fire, electrical shock or personal injury, always turn off light fixture and allow it to cool prior to replacing light bulb.
- Do not touch bulb when fixture is turned on. Do not look directly at lit bulb.