

ASSEMBLING & INSTALLATION INSTRUCTIONS PRODUCT 50511 50940

50292 For Wall Mount Fixture

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .
ATTENTION! COUPER LE COURANT AU FUSIBLE OU LE DISJONCTEUR.

MOUNTING THE FIXTURE

Installation (see fig.1)

1. Shut off the power at the circuit breaker and remove old fixture, including the cross bar.
2. Attach the mounting screw part way into the side hole of the crook cross bar, then lock it securely with hex nut until becoming.
3. Attach the cross bar to the junction box using two box screws. The side of the cross bar marked "GND" must face out. **The Junction box is not included.**
4. Follow wiring instructions carefully (see fig.2)
5. Attach the lamp body(A) onto the junction box, aligning screws on cross bar with mounting holes and lock it securely with the ball nuts(F).
6. Raise the bell glass(D) insert the big ring(E), pipe end ring is hung on the hook(B) of the lamp body, the other end is hung on the hook of the big ring(E), attach the candle sleeve(C) insert the lamp holder.
7. Install the light bulbs in accordance with the fixture's specifications. **DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**

Wiring (see fig.2)

1. Connect the electrical wires as follows. Connect the Black wire from the fixture to the black house (hot) Wire. Connect the white wire from the fixture to the white (neutral) house wire. Make sure all wire nuts are secured. You may wrap the connections with electrical tape. If your outlet box has a ground wire (green or bare copper) connect fixture's ground wire to it. Otherwise attach the bare copper fixture wire to the green ground screw on the mounting plate.
2. Tuck the wire connections neatly into the wall junction box.

Fig.1

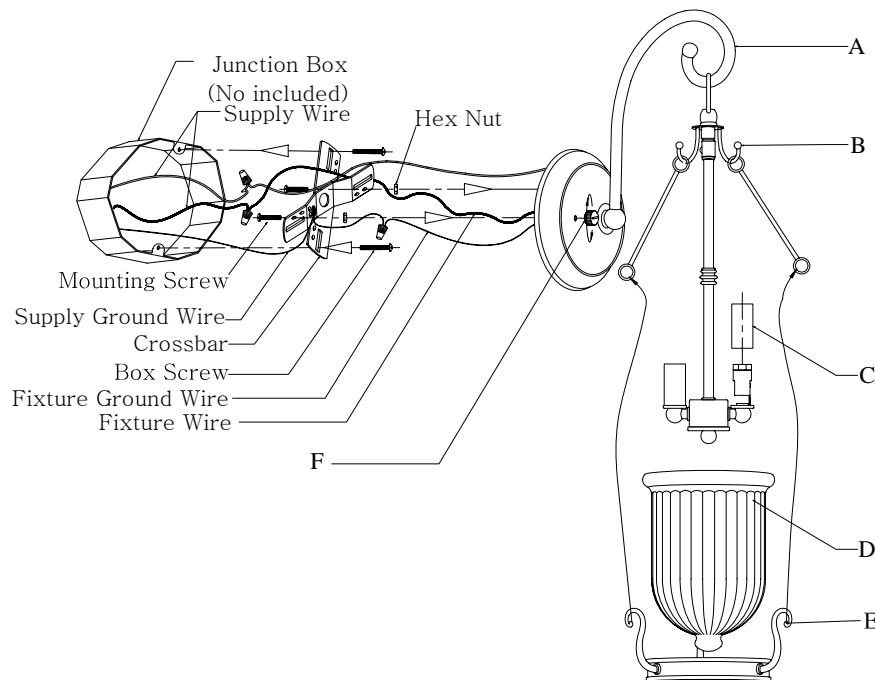


Fig.2

FIXTURE WIRES	HOUSE WIRES	FIXTURE WIRES	HOUSE WIRES	FIXTURE WIRES	HOUSE WIRES
Black or Smooth	Black (Hot)	White or Ribbed	White (Neutral)	Bare Copper (Ground)	Green or Bare Copper (Ground)