


MODEL: SLP102
250LPH SOLAR PUMP KIT
ASSEMBLY INSTRUCTIONS
READ AND SAVE THESE INSTRUCTIONS

UNPACK THE PACKAGE:


YOU SHOULD HAVE RECEIVED LISTED PARTS:

- 1PC PUMP WITH 5M CABLE,
- 1PC SOLAR PANEL,
- 1PC SOLAR PANEL BRACKET,
- 1PC EXTENSION TUBE,
- 1PC GROUND SPIKE,
- 1SET FOUNTAIN SPRAY PARTS.


1. JOIN THE BRACKET, TUBES AND SPIKE TOGETHER AND THEN ATTACH THE SOLAR PANEL TO THE BRACKET. SLIDE THE HOLDING BRACKET INTO THE INSIDE LIP OF THE TOP HALF OF THE SOLAR PANEL FRAME. THE HOLDING BRACKET HOLDS THE WEIGHT OF THE SOLAR PANEL. THE DIRECTION TOWARDS THE SUNLIGHT CAN BE ADJUSTED WITH THE WINGOUT. SEE DIAGRAM.

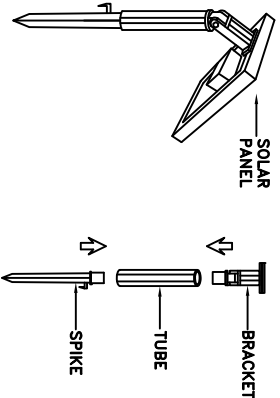

2. INSERT THE SPIKE INTO THE GROUND. POSITION THE SOLAR PANEL TO FACE SOUTH (In Northern Hemisphere) AS MUCH AS POSSIBLE TO MAKE THE MOST OF THE DAYLIGHT HOURS. IT IS IMPORTANT TO ANGLE THE SOLAR PANEL TO FACE SUN WHEN SUN IS AT ITS HIGHEST POINT. ENSURE THE SOLAR PANEL IS NOT SHADED BY TREES, SHRUBS OR BUILDINGS.

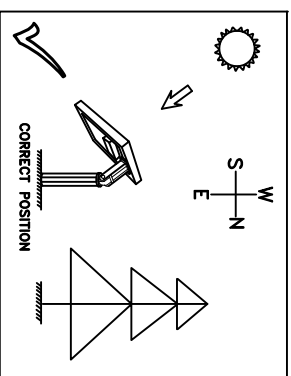

3. TWIST PUMP PLUG SLIGHTLY AND PUSHING IT INTO THE [PUMP] SOCKET, MAKE SURE ITS SEALING RING IS FULLY IN GROOVE. NOW YOUR SOLAR PUMP IS READY TO USE, IT WILL BEGIN TO WORK WHEN RECEIVING GOOD ENOUGH SUNLIGHT.

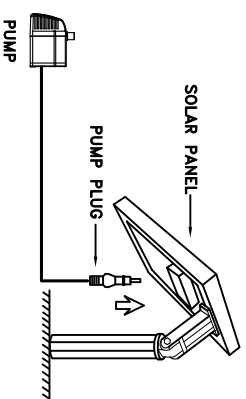

4. PERFORMANCE OF PUMP:

THIS PRODUCT IS DESIGNED FOR SUMMER USE BUT ALSO WORKS IN SPRING AND AUTUMN AS LONG AS THE SUN LIGHT CONDITION IN YOUR REGION IS GOOD ENOUGH.


THE PERFORMANCE OF THE PUMP DEPENDS ON THE ORIENTATION OF THE SOLAR PANEL TOWARD THE SUN AND THE SUNLIGHT STRENGTH. THE MAXIMUM DATA OBTAINED UNDER OPTIMAL CONDITIONS. A SOLAR PANEL SHADED BY TREES, SHRUBS, BUILDINGS, OR IN POOR WEATHER CAN NOT BE GUARANTEED.

5. HOW TO ASSEMBLE THE SPRAY PARTS FOR THE POND FOUNTAIN


PLACE THE PUMP IN THE POND OR RESERVOIR. MAKE SURE THERE IS ENOUGH WATER IN THE POND OR RESERVOIR. THE PUMP NEED TO BE FULLY IMMERSED IN WATER.

MODEL: SLP102
250LPH SOLAR PUMP KIT
OPERATING INSTRUCTIONS
READ AND SAVE THESE INSTRUCTIONS

THE PUMP CAN BE PLACED UNDER WATER OR FLOAT ON THE WATER SURFACE. YOUR CHOICE WILL DEPEND ON THE WATER DEPTH AND TYPE OF RESERVOIR USED. IF THE WATER DEPTH IS SHALLOW WE SUGGEST THE UNDER WATER ASSEMBLY, FOR DEEPER PONDS OR RESERVOIRS YOU WILL NEED TO USE THE FLOATING ASSEMBLY.

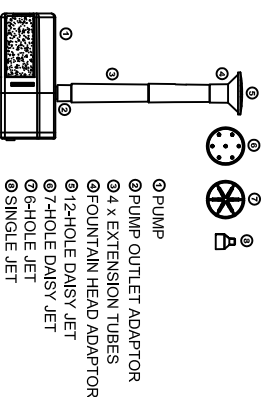

DEEP WATER ASSEMBLY

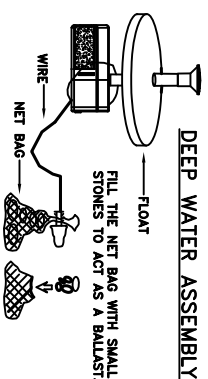

6. PROBLEM SHOOTING:

CHECK SOLAR PANEL, PUMP CONNECTED WELL.

CHECK SOLAR PANEL CORRECTLY POSITIONED IN SUNNY PLACE, ENSURE THE SOLAR PANEL IS NOT SHADED BY TREES, SHRUBS OR BUILDINGS.


CHECK WATER LEVEL, MAKE SURE THE PUMP IS FULLY SUBMERGED.

CHECK THE FOUNTAIN TUBING FOR KINKS AND OBSTRUCTIONS.

CHECK THE PUMP FILTER / IMPELLER BLOCKED BY DEBRIS

CHECK THE PUMP MAY BE "AIR LOCKED", TURN ON/OFF THE PUMP SEVERAL TIMES TO CLEAR ANY AIR THAT MAY HAVE BEEN TRAPPED.

7. MAINTENANCE OF PUMP
 IF YOU FIND THE PUMP START LOSING POWER OR STOP WORKING, CHECK THE PUMP FILTER AND IMPELLER BLOCKED, CLEAR THEM WITH WATER.

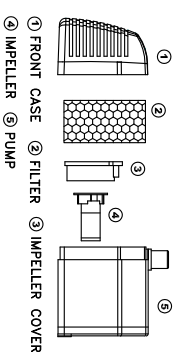

8. TECHNICAL DATE

- MAX. PUMP CAPACITY: 250LPH
- MAX. PUMP HEIGHT: 90CM /36"
- MAX. FOUNTAIN HEIGHT: 50CM /20"
- WORKING VOLTAGE: DC5V -DC8V
- MAX. WORKING POWER: 0.54W-1.2W
- PROTECTION GRADE OF PUMP: IP68
- SOLAR PANEL: 2.0W-8V-0.25A
- SOLAR PANEL SIZE: 190X150X18MM
- PROTECTION GRADE: IP44

9. WINTER PROTECT

INDOOR STORAGE IS RECOMMENDED IN WINTER.

10. WARRANTY

THANK YOU FOR CHOOSING SUNNYDAZE DECOR. IF YOU HAVE ANY QUESTIONS, COMMENTS OR CONCERNS PLEASE FEEL FREE TO CONTACT US BY PHONE AT: 888-881-4688. BY EMAIL: CUSTOMERSERVICE@SERENITYHEALTH.COM, OR YOU COULD ALSO EMAIL US VIA OUR CONTACT US PAGE AT: WWW.SERENITYHEALTH.COM/CONTACT-US/.

WE STAND BEHIND OUR BRAND AND THE QUALITY OF THE ITEMS WE SELL. WE WILL SEND NEW PARTS OR REPLACE PRODUCTS AT OUR DISCRETION WITHIN THE ONE YEAR WARRANTY PERIOD. BEFORE WE CAN HELP, YOU WILL NEED TO PROVIDE PROOF OF PURCHASE WITH THE DATE OF PURCHASE AND PHOTOS OF THE DEFECTIVE MERCHANDISE. WE WILL USE THE PHOTOS TO DETERMINE THE CAUSE OF DEFECT AND FOR FUTURE QUALITY CONTROL.

