

INSTALLATION INSTRUCTION

FLIP - dweLED™

BL-1021R, BL-1021L

WAC LIGHTING

Responsible Lighting®

WARNING

IMPORTANT: NEVER attempt any work without shutting off the electricity.

- Read all instructions before installing.
- System is intended for installation by a qualified electrician in accordance with the National Electrical Code and local regulations.
- Go to the main fuse box, or circuit breaker. Place the main power switch in the "OFF" position and unscrew the fuse(s) or switch "OFF" the circuit breaker switch(es) that control the power to the fixture or room that you are working on.
- Place the wall switch in the "OFF" position.

CAUTION

- All parts must be used as indicated in these instructions. Do not substitute any parts, leave parts out, or use any parts that are worn out or broken. Failure to follow this instruction could invalidate the ETL/CETL listing of this fixture.

CAUTION When handling the fixture, do not apply pressure to the LEDs. Hold the fixture by the base only.

AVERTISSEMENT

IMPORTANT : Coupez l'électricité avant TOUTE manipulation.

- Lisez toutes les instructions avant d'installer.
- Système est destiné à être installé par un électricien qualifié en conformité avec le code national de l'électricité et les règlements locaux.
- Accédez au panneau central de disjoncteurs ou de fusibles de votre demeure et placez l'interrupteur principal en position d'arrêt (« OFF »).
- Placez l'interrupteur mural en position d'arrêt (« OFF »).

MISE EN GARDE

- Toutes les pièces doivent être utilisées tel qu'il est indiqué dans ces instructions. Ne remplacez pas les pièces, n'en laissez pas de côté et ne les utilisez pas si elles sont usées ou brisées. Le non-respect de ces instructions peut annuler l'homologation ETL/CETL du luminaire. MISE EN GARDE Ors de la manipulation de l'appareil, ne pas appliquer de pression à la LED, tenir l'appareil par la seule base.

ADVERTENCIA

IMPORTANTE: NUNCA intente hacer trabajos sin desconectar el suministro eléctrico.

- Lea y comprenda todas las instrucciones e ilustraciones por completo antes de proceder con el ensamblaje e instalación de esta lámpara.
- Sistema está diseñado para ser instalado por un electricista calificado, de acuerdo con el código eléctrico nacional y las normas locales.
- Diríjase a la caja de fusibles o a la caja del interruptor de circuito principal en su hogar. Coloque el interruptor de alimentación principal en la posición "OFF" (APAGADO).
- Coloque el interruptor de la pared en la posición "OFF" (APAGADO).

PRECAUCIÓN

- Todas las piezas deben usarse como lo indican estas instrucciones. No reemplace las piezas, no omita piezas durante la instalación ni utilice piezas gastadas o rotas. El incumplimiento de esta indicación podría invalidar la calificación ETL/CETL esta lámpara. PRECAUCIÓN Al manipular el aparato, no aplique presión a los LED, mantenga el aparato en la base sólo.

HARDWARE

A1	B1	C1	D1	E1	F1	G1	H1	I1	J1
									
Wire Connector Qty: 3	Junction Box Screw Qty: 2 + 1 extra	Allen Wrench Qty: 1	Hole Plug Qty: 1	Wood Screw Qty: 6 + 1 extra	Plastic Anchors Qty: 6 + 1 extra	Cord Bracket Qty: 2	Cord Cover Qty: 2	Green Grounding Screw Qty: 1	Allen Screw Qty: 1 + 1 extra

WAC Lighting

www.waclighting.com

Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive • Port Washington, NY 11050

Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center

1750 Archibald Ave • Ontario, CA 91761

Phone (800) 526.2588 • Fax (800) 526.2585



INSTALLATION INSTRUCTION

FLIP - dweLED™

BL-1021R, BL-1021L

WAC LIGHTING

Responsible Lighting®

PREPARATION

1. Carefully unpack your new fixture and lay out all the parts on a clear area. Be careful not to lose any small parts necessary for installation.

2. Remove the mounting plate (K1) from fixture

PORTABLE INSTALLATION (Fig. 1)

1. Drill holes in the wall aligned with the key-hole location in mounting plate (K1).

2. Insert plastic anchors (F1) into holes. Insert wood screws (E1) into anchors leaving enough length to hang mounting plate (K1).

3. Hang mounting plate (K1) and tighten screws until mounting plate is secured to the wall.

4. Place the fixture onto the mounting plate and secure it with the allen screws (J1) using the allen wrench (C1) provided.

5. Install optional cord cover if desired. Drill holes in the wall aligned with the hole locations on the cord bracket (G1). Insert plastic anchors (F1) into wall. Secure bracket to the wall with wood screws (E1).


6. Place the cord into the bracket (G1). Snap the cord cover (H1) over the bracket.

7. Plug into outlet.

8. This lamp features a dimmer switch. Press and release to turn on/off. When fixture is on, press and hold the switch to cycle from dim to bright and release when desired brightness is reached.

IMPORTANT SAFETY INSTRUCTIONS

This portable lamp has a polarized plug (one blade is wider than the other) as a safety feature to reduce the risk of electric shock. This plug will fit a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Never use with an extension cord unless the plug can be fully inserted. Do not change or alter the plug.

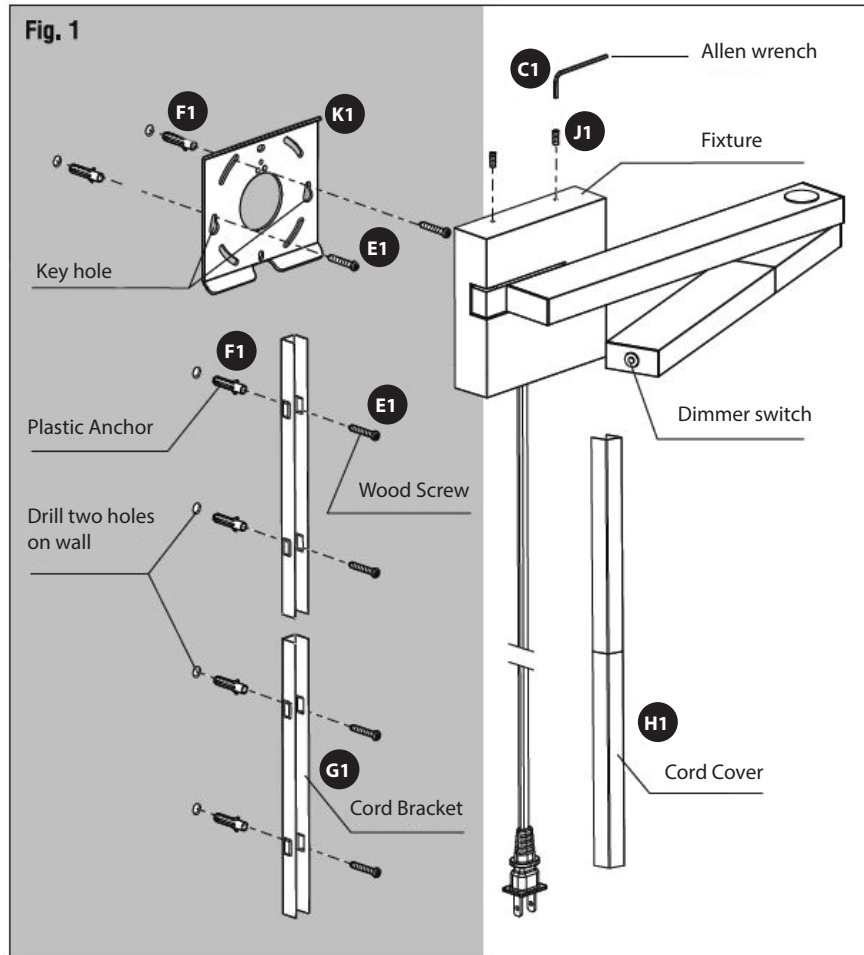

INSTALLATION INSTRUCTION

FLIP - dweLED™

BL-1021R, BL-1021L

WAC LIGHTING

Responsible Lighting®

PERMANENT INSTRUCTIONS (Fig. 3)

1. Drill holes in the wall aligned with the key-hole location in mounting plate (K1).

2. Insert plastic anchors (F1) into holes. Insert wood screws (E1) into anchors leaving enough length to hang mounting plate (K1).

3. Hang mounting plate (K1) and tighten screws until mounting plate is secured to the wall.

4. Place the fixture onto the mounting plate and secure it with the allen screws (J1) using the allen wrench (C1) provided.

5. This lamp features a touch switch. Press and release to turn on/off. When fixture is on, press and hold the switch to cycle from dim to bright and release when desired brightness is reached.

FOR JUNCTION BOX INSTALLATION

(optional Fig. 4)

2. Secure the mounting ring (Y1) to the junction box (F1) using junction box screws (K1). Make sure the two holes (spacing 2-3/4") are vertically aligned as shown in Fig. 4.

3. Put the mounting plate (B1) and the conversion plate (Q1) onto the mounting ring (K1). Make sure the two holes on the mounting plate (B1) are aligned with the two slots on the conversion plate (Q1) and the two holes on the mounting ring (Y1). Fasten them using the long screws (Z1).

CONNECTING THE WIRES (Fig. 5)

4. Connect the electrical wires as shown in Fig. 3, making sure that all wire connectors are secured. If your outlet box has a green or bare copper ground wire, connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate (Z1) using the green screw provided. After wires are connected, tuck them carefully inside the junction box.

5. Place the fixture back plate (E1) over the mounting plate (B1) and secure with screws (D1).

Fig. 3

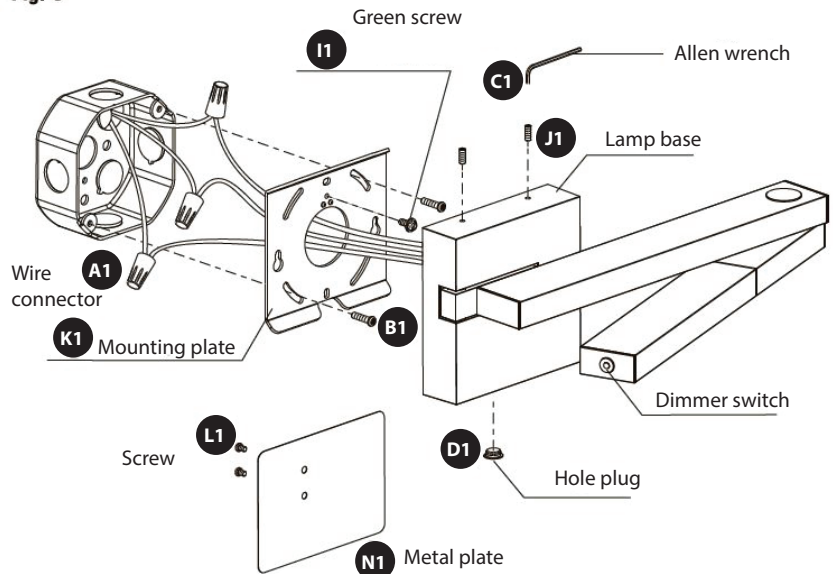


FIG.4
For Junction Box

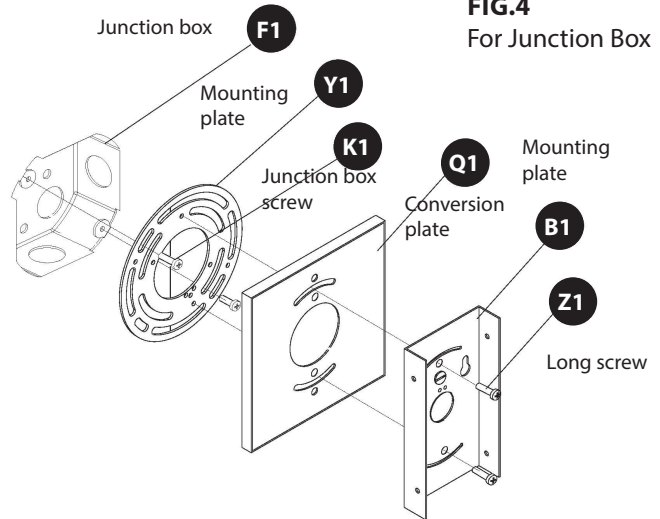


FIG.5

Fixture Wires


Black or Smooth

Fixture Wires

White or Ribbed

Fixture Wires

Bare Copper (Ground)



House Wires

Black (Hot)

House Wires

White (Neutral)

House Wires

Green or Bare Copper (Ground)

WAC Lighting

www.waclighting.com

Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive • Port Washington, NY 11050

Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center

1750 Archibald Ave • Ontario, CA 91761

Phone (800) 526.2588 • Fax (800) 526.2585

