

# ASSEMBLY AND INSTALLATION INSTRUCTIONS




C0130

**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

- NOTES:** 1. Before installing, consult local electrical codes for wiring and grounding requirements.  
2. READ AND SAVE THESE INSTRUCTIONS.

## For Pendant

### Hardware Package (included):

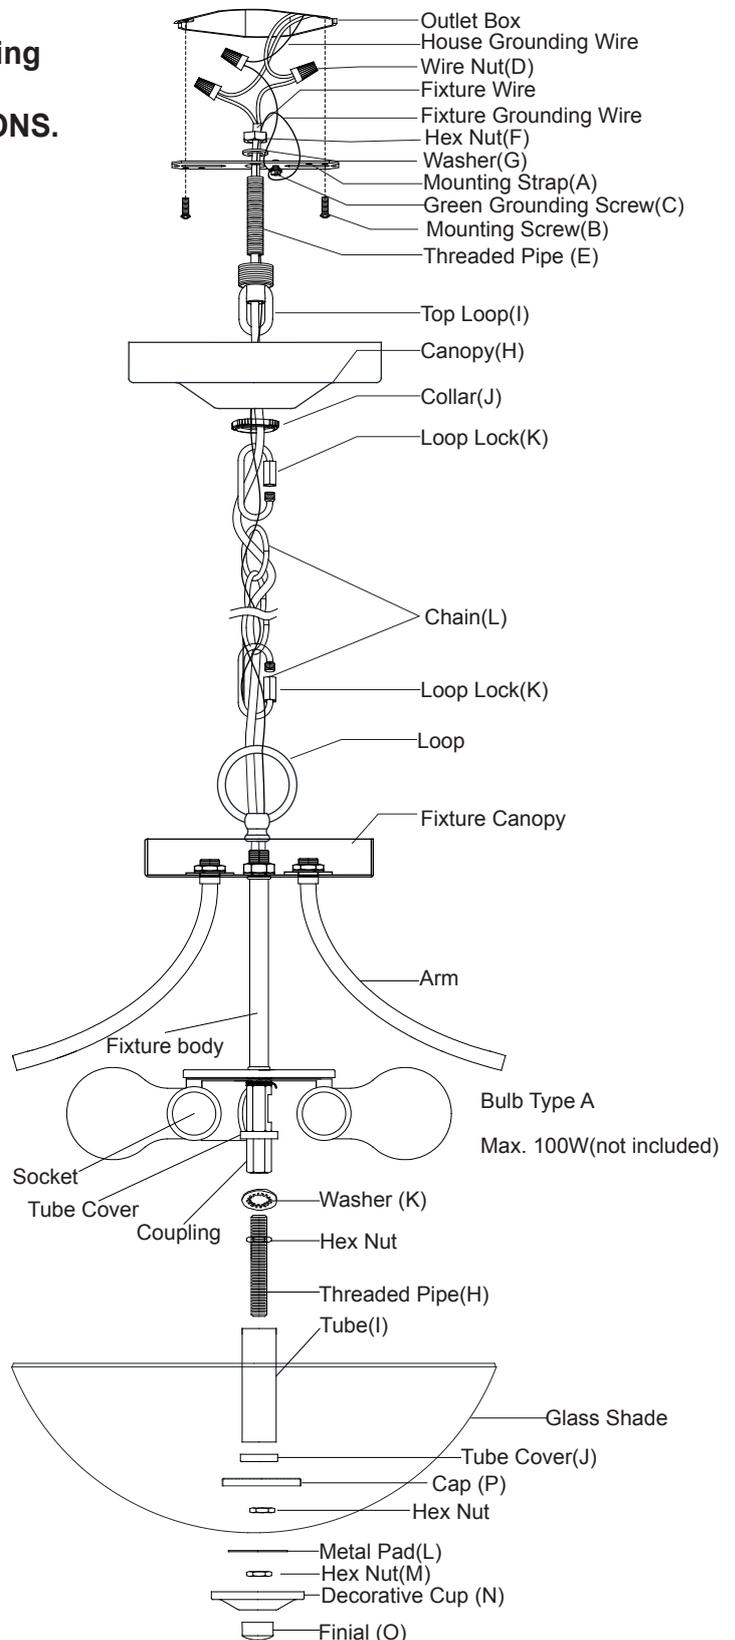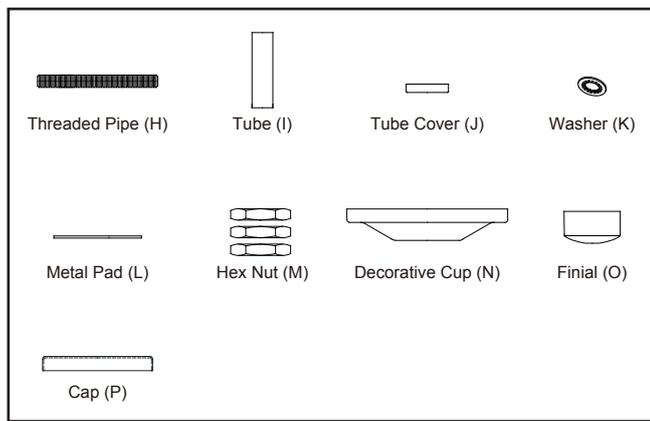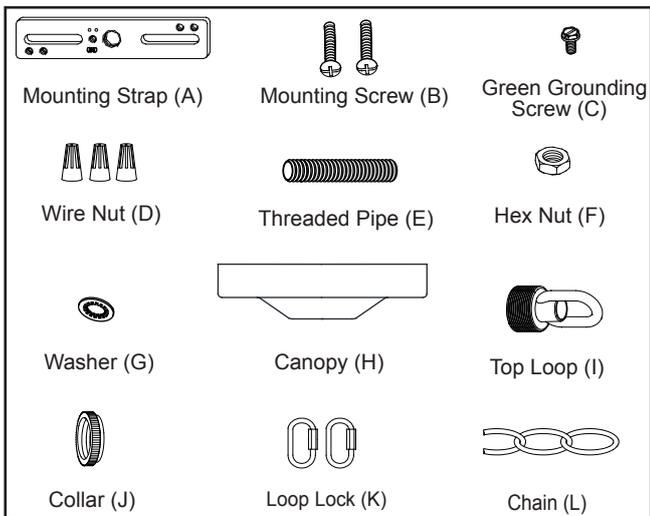

## Installation Steps

Turn off the power at fuse or circuit box

1. Remove contents of hardware package marked "For Pendant".
2. Attach the threaded pipe to the mounting strap, and then secure it with a washer and a hex nut.
3. Attach the mounting strap to the outlet box by using two mounting screws.
4. Secure the top loop to the threaded pipe.
5. Secure the loop onto fixture canopy, thread fixture wires through threaded end of loop first.


6. Connect the chain:
    - Determine length of chain needed to achieve desired fixture height. (To remove excess chain section, use pliers to bend link open.)
    - Weave the fixture wires and fixture grounding wire through the chain, collar and canopy.
  7. Connect one end of the chain to the loop using a loop lock.
  8. Connect the other end of the chain to top loop by using the other loop lock.
  9. Thread the fixture wire and fixture grounding wire through the top loop, threaded pipe and mounting strap.
  10. Cut the redundant wires if necessary. Pull out the source wires from the outlet box. Make wire connections using wire nuts as follows:
    - Connect the smooth-coated wire (marked) from the fixture to the black wire from the power source.
    - Connect the ribbed-coated wire (unmarked) from the fixture to the white wire from the power source.
    - Attach the fixture grounding wire to the mounting strap with the green grounding screw, and then connect it to the house grounding wire with a wire nut.
 Carefully put the wires back into the outlet box.
  11. Attach the canopy to the mounting strap by inserting the top loop, and then secure it with the collar.
  12. Adjust the three arms and allow the angle between them is the same.
  13. Install three bulbs (not included). Check relamping label at socket area or packaging for maximum allowed wattage.
  14. Attach the threaded pipe into the coupling of socket, and secure it with the washer and hex nut.
 

**Note: Depth of the threaded pipe may need to be adjusted to properly fit glass shade, decorative cup and finial.**
  15. Attach the tube onto the tube cover above the coupling and another tube cover and cap onto the bottom of the tube. Then tighten them with the hex nut. Make sure the opening side of cap facing down.
  16. Slip the glass shade and metal pad through the threaded pipe and upward the socket base. Then tighten them with the hex nut.
- Caution: Do not over tighten, breakage of glass shade could be occurred.**
17. Slip the the decorative cup up through the threaded pipe, secure it with a finial.

Turn on the power at fuse or circuit box


## For Semi-Flush

### Hardware Package (included):

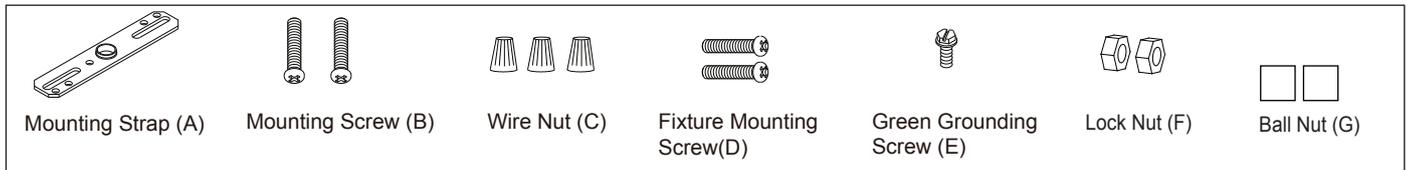

Turn off the power at fuse or circuit box



1. Remove contents of hardware package marked "For Semi-Flush".
2. Attach two fixture mounting screws to the mounting strap, and then secure it with two lock nuts. Adjust the length of the fixture mounting screws if necessary.
3. Attach the mounting strap to the outlet box using two mounting screws.
4. Cut the redundant wires if necessary. Pull out the source wires from the outlet box. Make wire connections using wire nuts as follows:
  - Connect the smooth-coated wire (marked) from the fixture to the black wire from the power source.
  - Connect the ribbed-coated wire (unmarked) from the fixture to the white wire from the power source.
  - Attach the fixture grounding wire to the mounting strap with the green grounding screw, and then connect it to the house grounding wire with a wire nut.
 Carefully put the wires back into the outlet box.
5. Unscrew the ball nut from the canopy. Attach the canopy to the mounting strap by inserting the fixture mounting screws, and then secure it with two ball nuts.
6. Follow steps 12~17 of instructions For Semi-Flush.

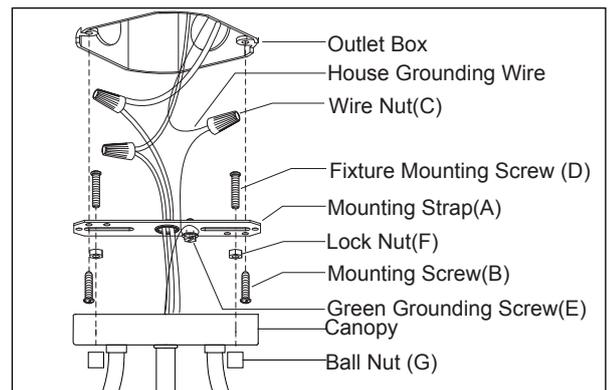



Turn on the power at fuse or circuit box


The following parts are available for re-order if damaged or missing.

**Spare Parts List:**

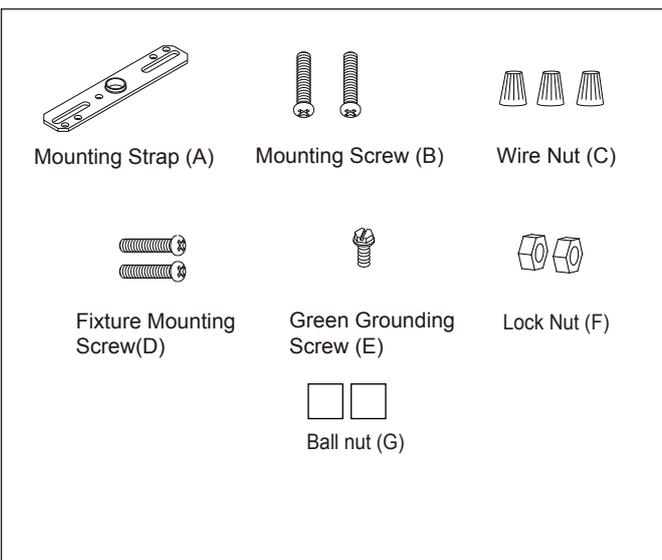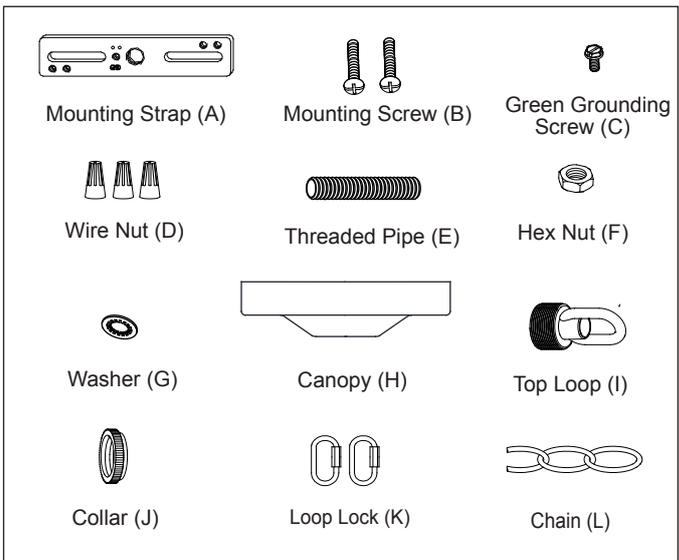 <p>Mounting Strap (A)    Mounting Screw (B)    Wire Nut (C)</p> <p>Fixture Mounting Screw (D)    Green Grounding Screw (E)    Lock Nut (F)</p> <p>Ball nut (G)</p>	 <p>Mounting Strap (A)    Mounting Screw (B)    Green Grounding Screw (C)</p> <p>Wire Nut (D)    Threaded Pipe (E)    Hex Nut (F)</p> <p>Washer (G)    Canopy (H)    Top Loop (I)</p> <p>Collar (J)    Loop Lock (K)    Chain (L)</p>	
<p>For Semi-Flush</p>	<p>Mounting Hardware 5610MM (1 SET)</p>	<p>For Pendant</p>

 <p>Threaded Pipe (H)    Tube (I)    Tube Cover (J)    Washer (K)    Metal Pad (L)</p> <p>Hex Nut (M)    Decorative Cup (N)    Finial (O)    Cap (P)</p>	 <p>Glass Shade 9845EW</p>
<p>Assembly Kit 5611AA (1 SET)</p>	

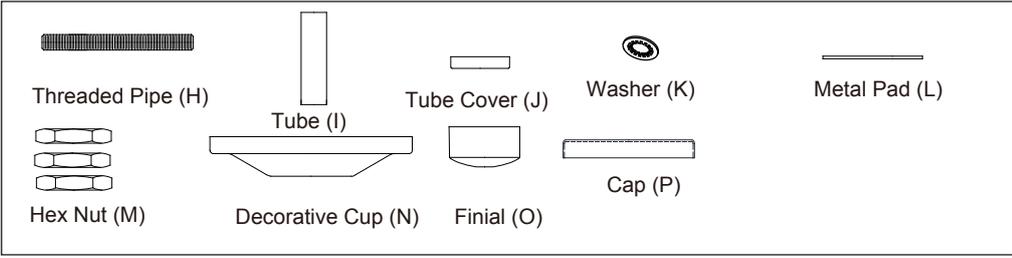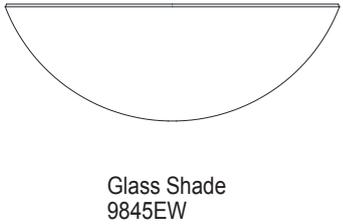

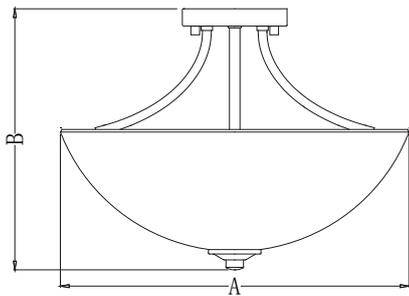A: 15-3/4"

B: 11-1/2"