



Features

- 3D LED Color Temperature Lights with Dimmable touch control
- Mirrored interior with 4 layers adjustable glass shelves
- Includes Digital Clock
- Includes Defogger with push button
- · Includes two outlets
- Includes an adjustable makeup mirror
- Includes installation hardware for recess mounting
- Can be recessed or surface mounted (surface mounting is included)
- · Interior Light with sensor switch
- Energy efficient LED lighting:

Kelvin	3000	6500	4500 mixed color
CRI	80+	80+	80+
Lumens*†	4628	4628	9256
R9 Value*	50+	50+	50+
Watts (AC)	150	150	150
Lumens per Watt	90	90	90

Construction

- Grey aluminum body and door frame
- 3 mirror design rear of cabinet and both sides of door
- Concealed finger pull-door edge
- Three pieces DTC solf-closing hinges for each door,
 both side door open 155°, middle door open 90°
- Adjustable shelving at 2 1/3" (60 mm) increments
- Single field wire into electrical shelf Front access serviceability

Codes/Standards Applicable

Electric Option Models are ETL certified to:

- UL 962
- CSA Standard C22.2 No. 68


Dimensions


Height: 36" (913 mm)

Width: 60" (1524 mm)

Depth: 5" (127 mm) When surface mounted

1" (25 mm) When recessed

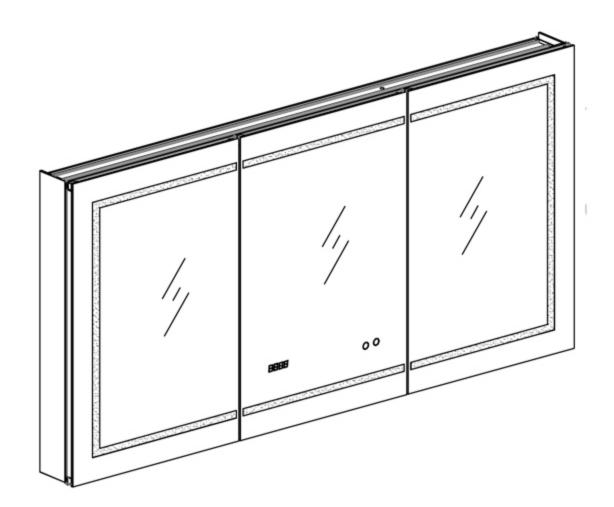

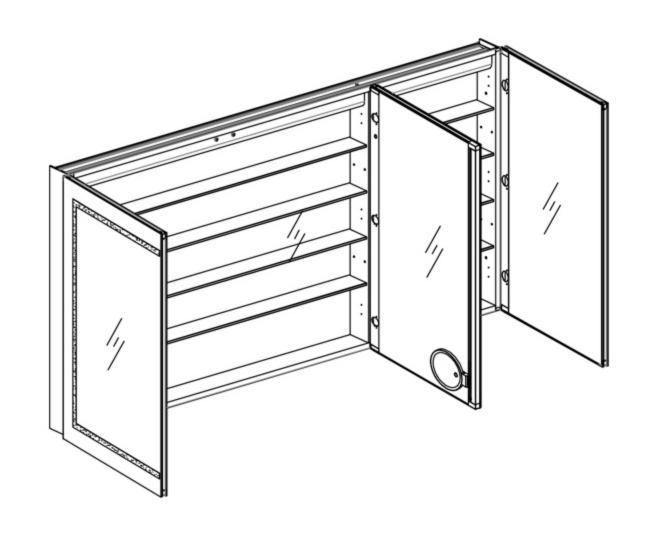


Installation Options


- Recessed Mount Rough Opening 35-1/2" H x 59-1/2" W x 4" D
 (901mm H x 1511mm W x 102mm D)
- Surface Mount Surface Mount Kit is included

Electrical System


- 150 Watts LED Driver
- INPUT: 120VAC 60HZ 3.0A
- OUTPUT : 12VAC 10A
- Field wire location as shown in drawing
- 1/2" conduit (Ø 7/8" actual) electrical knockout location shown below
- Included field wire cable clamp
- Circuit Diagram

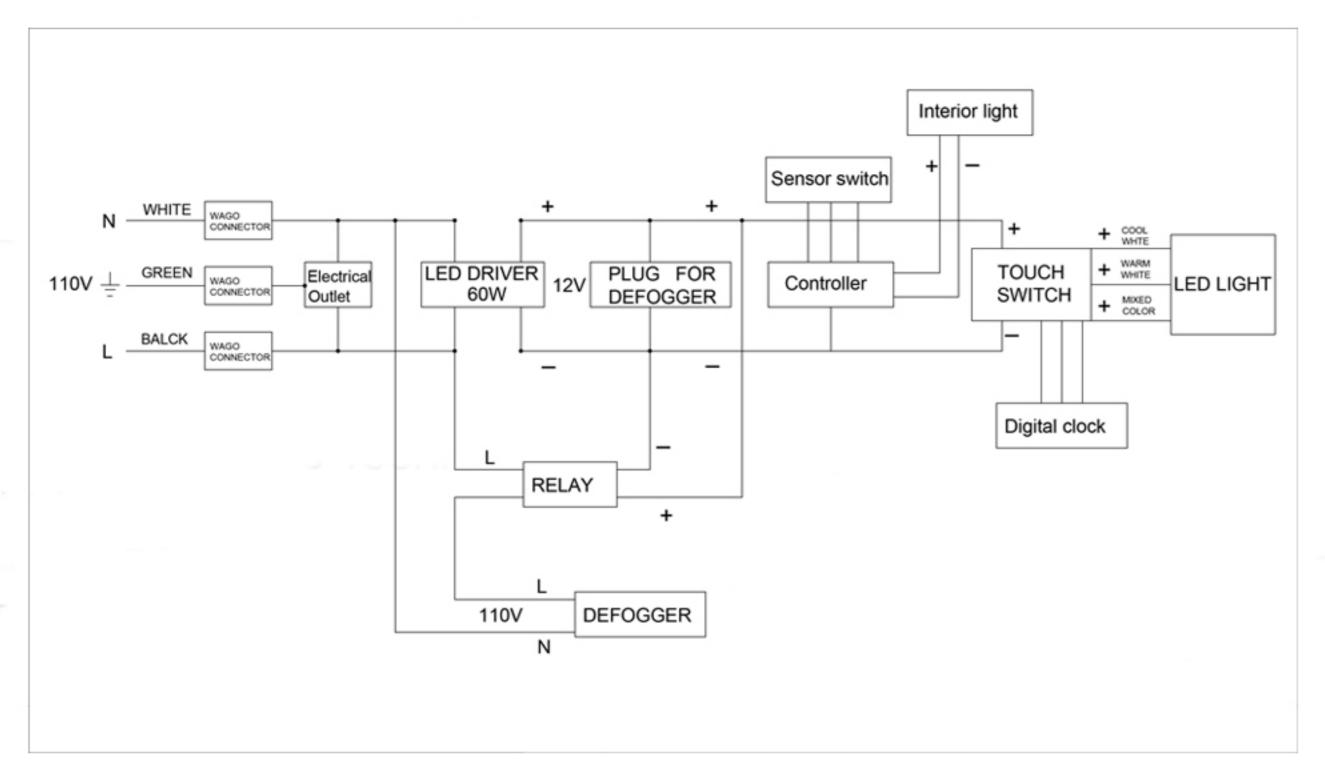


Circuit Diagram

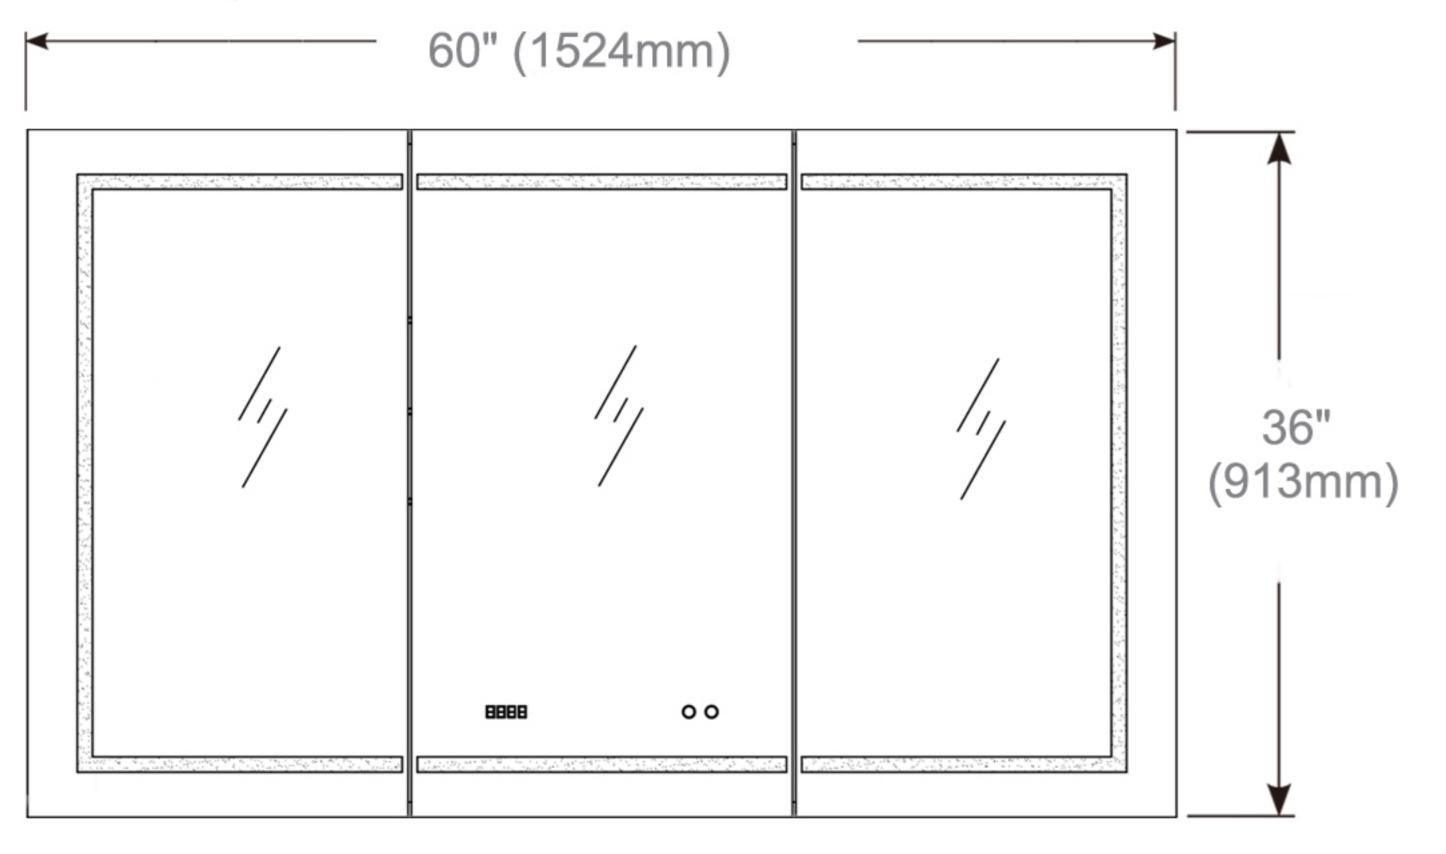


Cabinet Dimensions

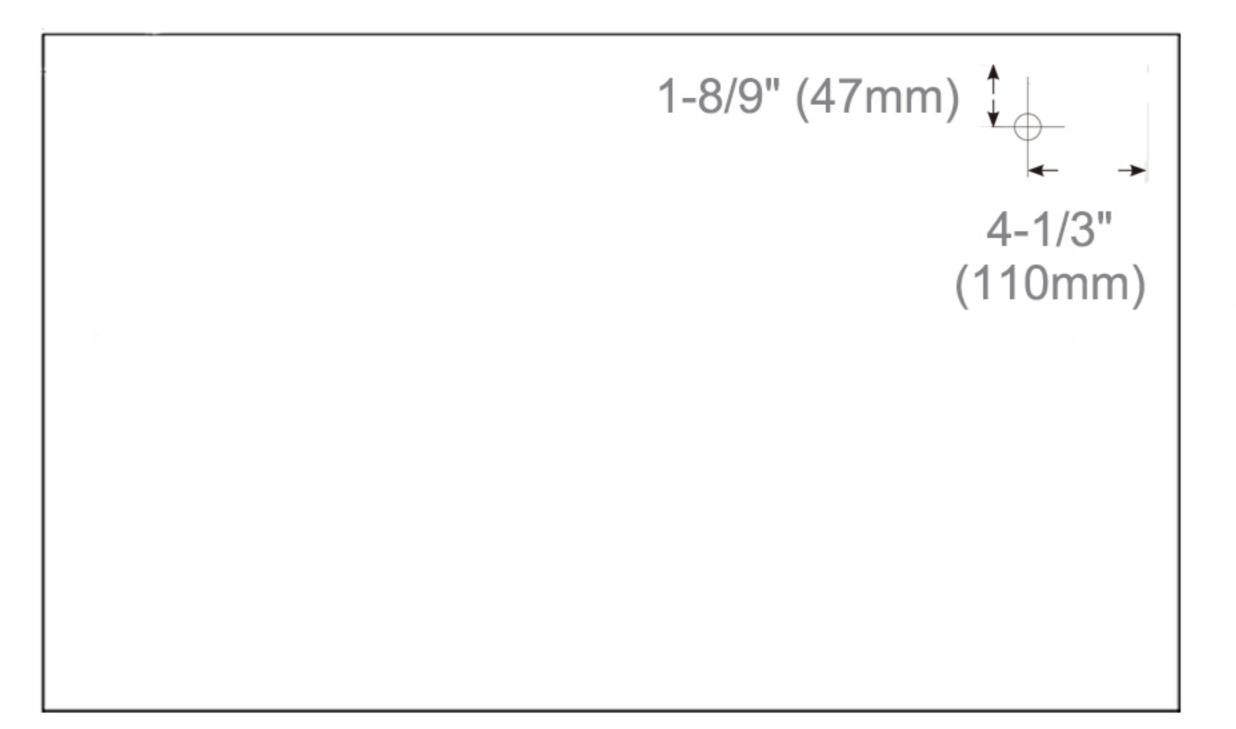

Back of Cabinet - Wire Access Location

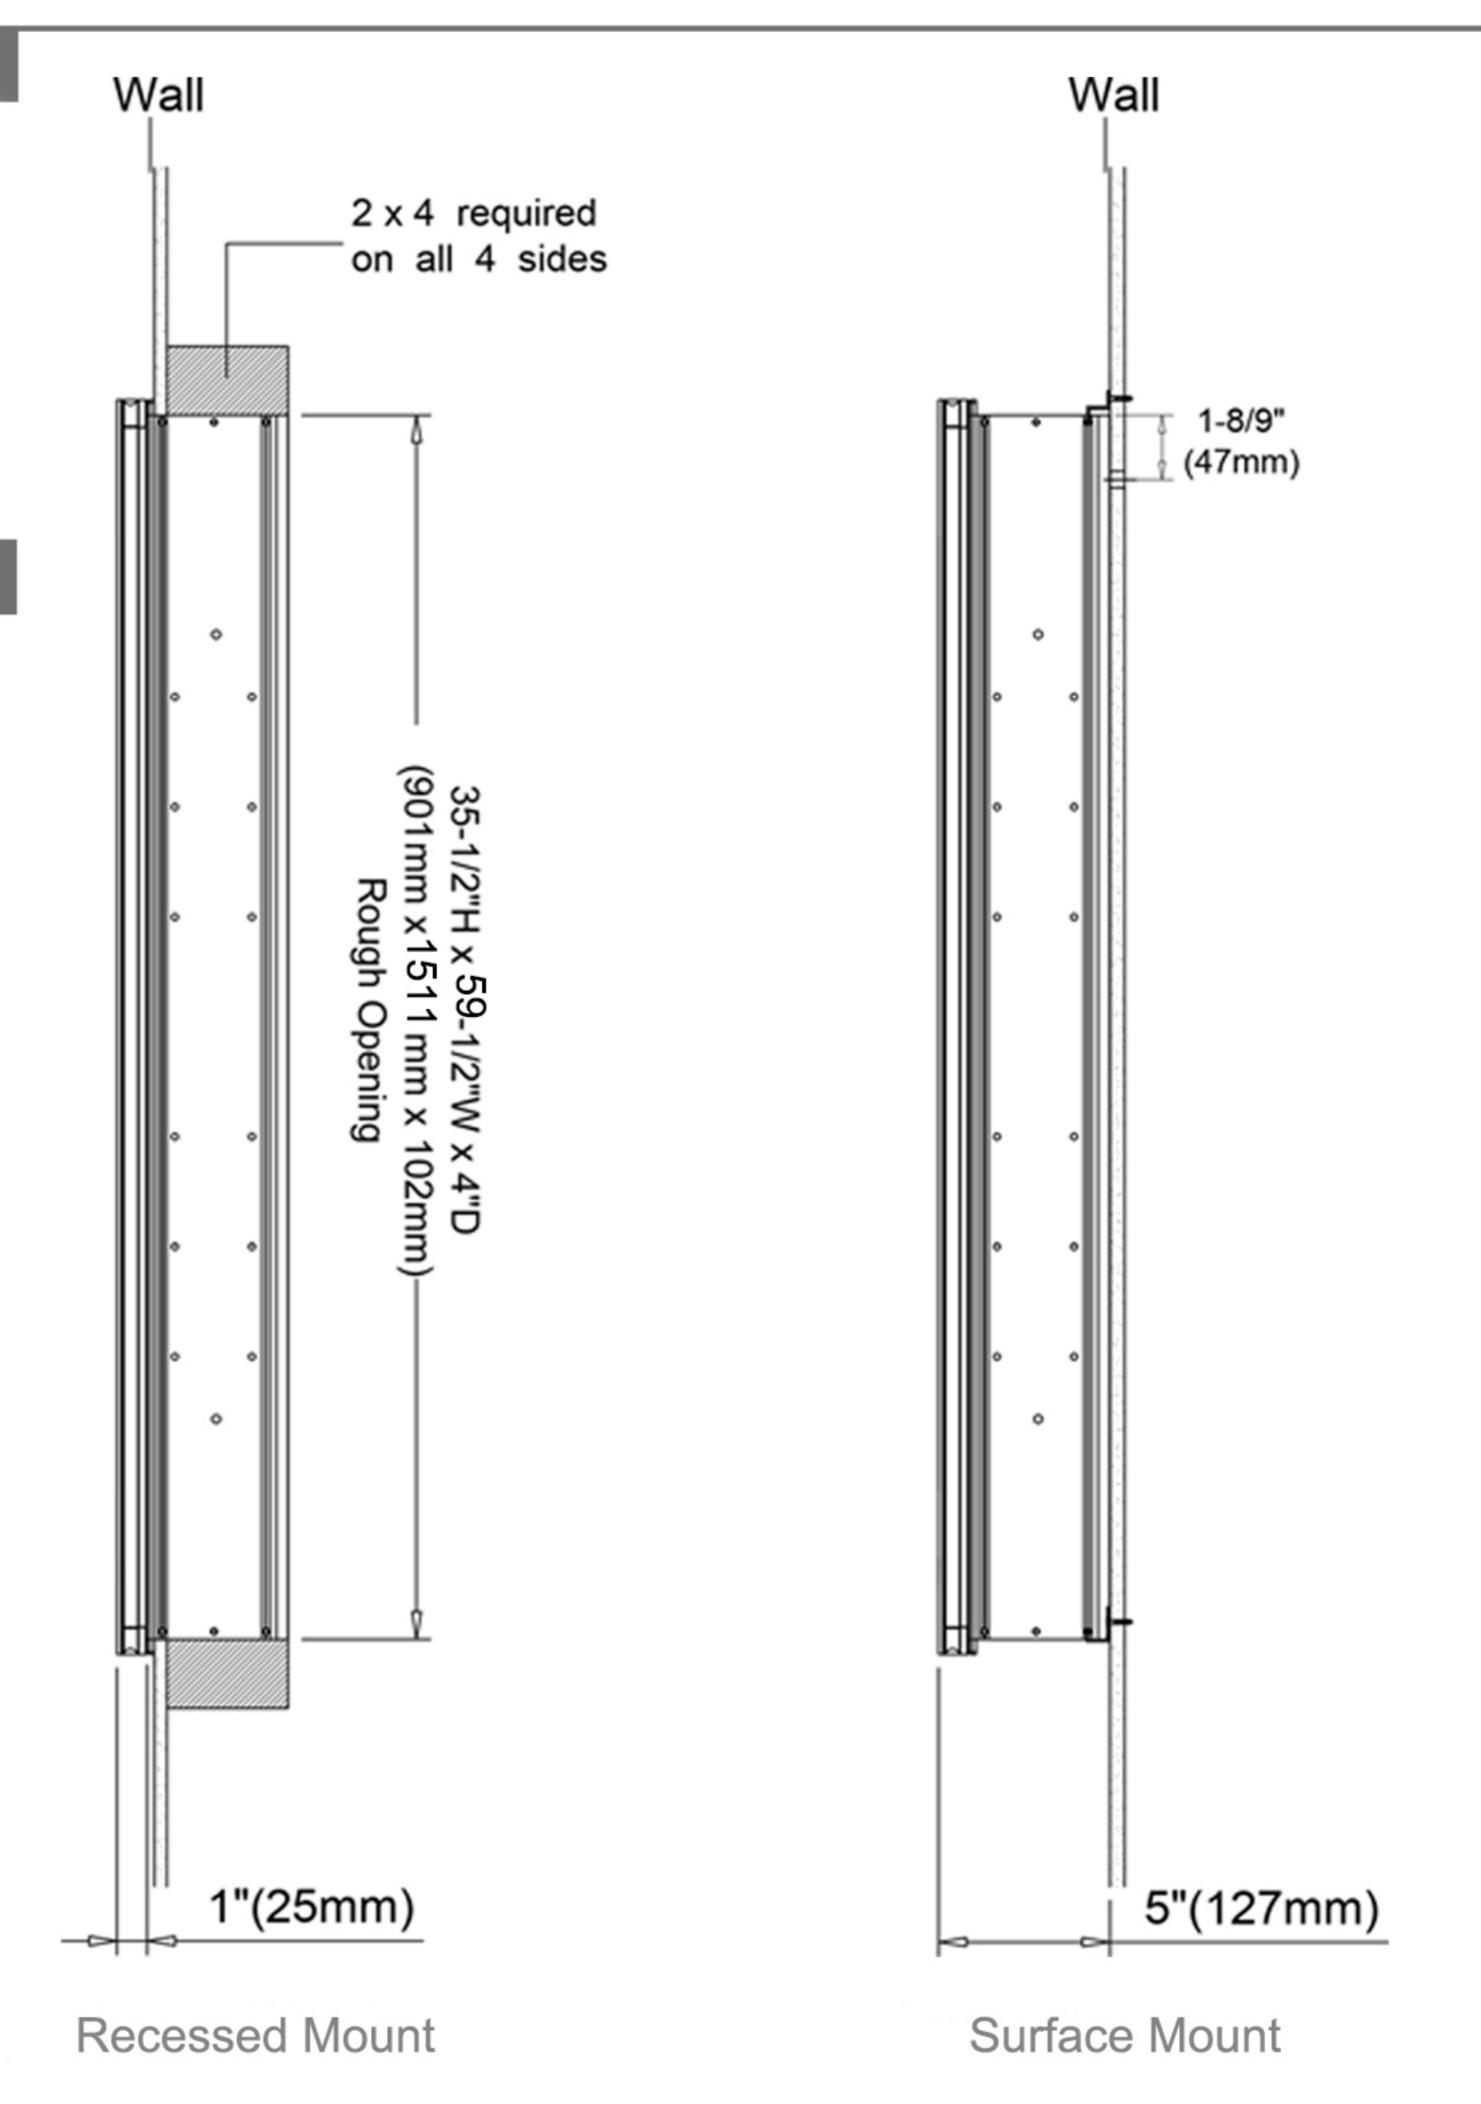

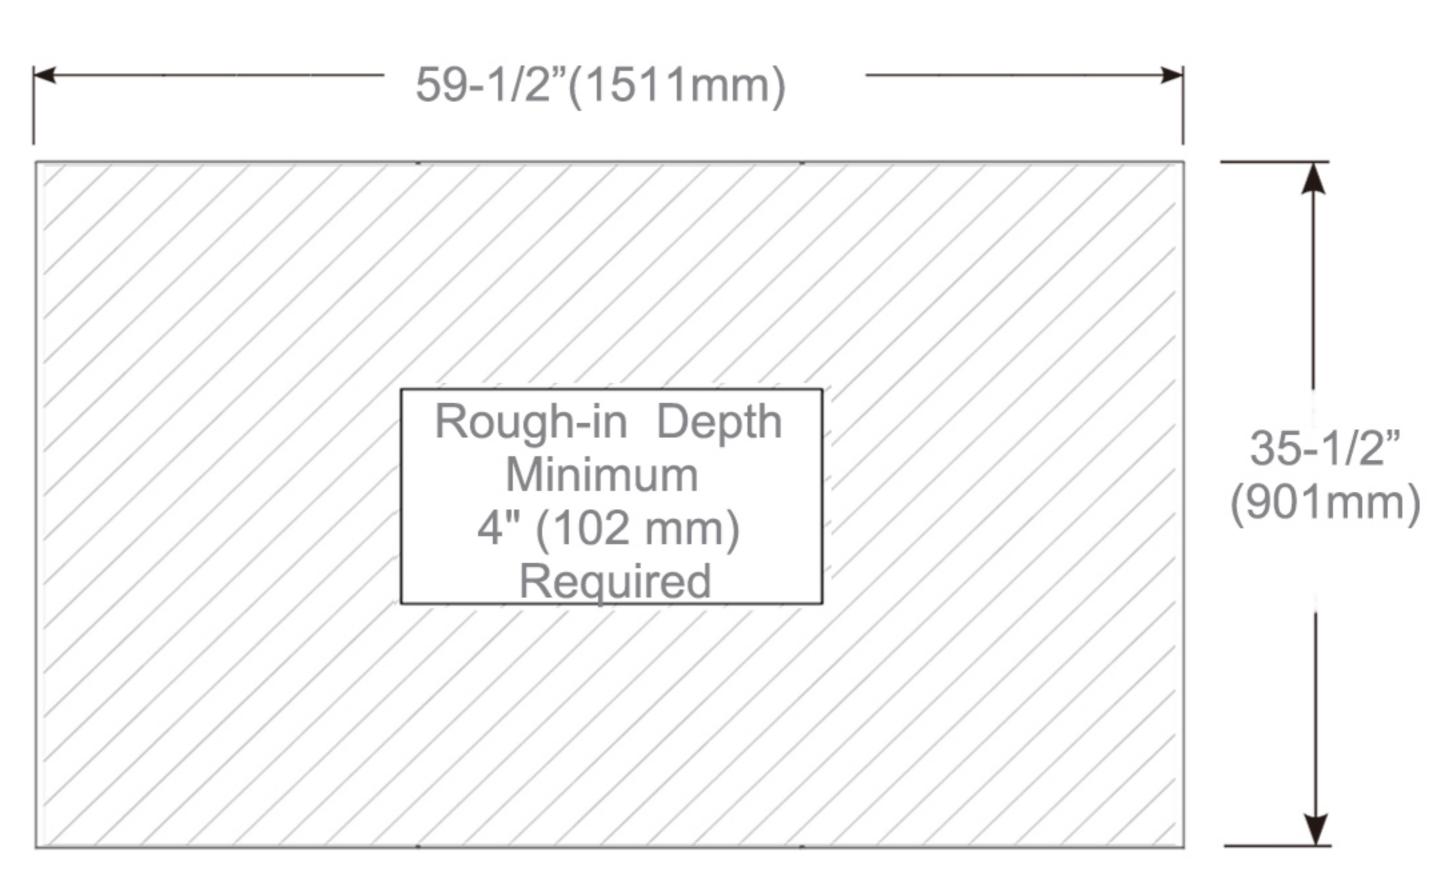

Rough-in Dimensions

www.aquadomusa.com