


INSTALLATION MANUAL

SHOWER ENCLOSURE

RECTANGULAR SLIDING
FRAMELESS

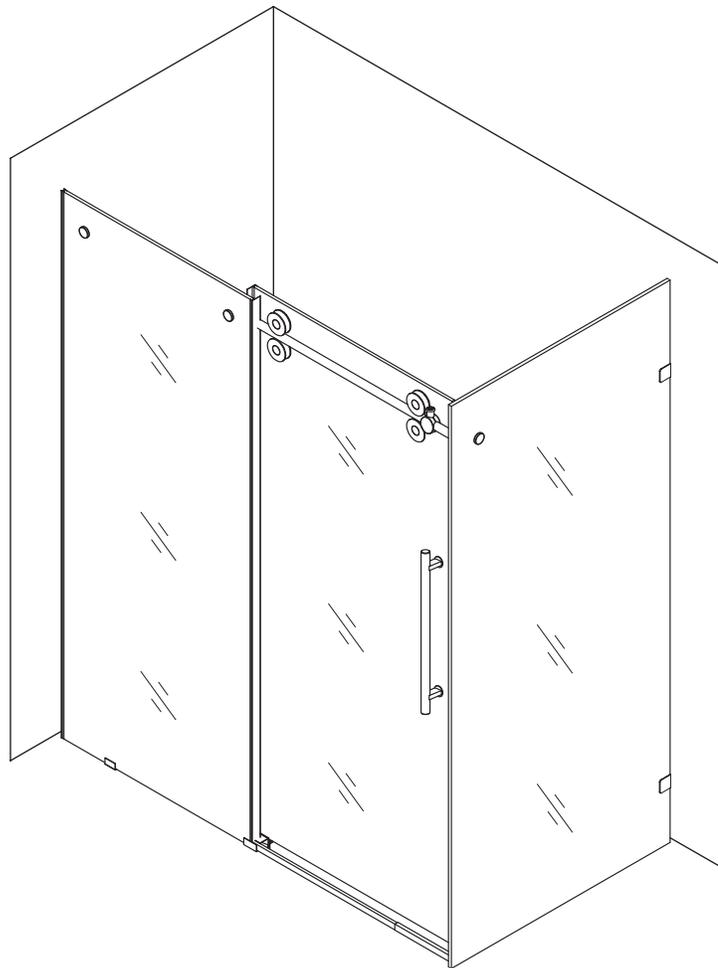

MODELS:

SER1 48

SER1 60

MODEL# SER1



READ ALL INSTRUCTIONS BEFORE UNPACKING THE PRODUCT



INSTRUCTIONS THAT, IF IGNORED, COULD RESULT IN DEATH OR SERIOUS INJURY CAUSED BY INCORRECT HANDLING OR INSTALLATION OF THE PRODUCT. THESE INSTRUCTIONS MUST BE OBSERVED FOR SAFE INSTALLATION.

ATTENTION!



2 PEOPLE ARE REQUIRED TO LIFT AND DURING ENTIRE INSTALLATION OF THIS PRODUCT



INSTALLATION OF THIS PRODUCT BY AN INEXPERIENCED INSTALLER MAY RESULT IN PERSONAL INJURY OR DEATH!



- We reserves the right to change, update, modify, alter, redesign this manual/product or its policies without prior notice!
- It is your responsibility to visit the website to download or contact customer service for the most updated version of the installation instructions.
- We shall not be liable for any injuries or property damages in connection with this product during installation or use of this product!

NOTES:


- Limited warranty is void on any commercial installation.
- We are not responsible for local code compliance for this product.
- Building and plumbing codes may vary from state-to-state in accordance to your location.
- We are not responsible for providing any compliance certifications.
- We are not responsible to provide any type of certifications for this product.
- Under no circumstances we shall not be liable for any and all incidental damages sustained in connection with this product Neither manufacture, nor distributor, nor retailer is responsible for water damage or flood caused due to use of this product.
- Under no circumstances We shall not be liable for any and all fees, cost defect. of installation/re-installation/removal, subsequent damage or transportation in case of the product defect.

ATTENTION:

- Always rest glass on a leveled surface.
- The glass panels are tempered and cannot be cut.
- Fiberglass, acrylic or sheetrock construction might not be sufficiently strong enough to support the shower door enclosure. You should use the wood framing from behind the face edge of the stall to provide a secure mounting to the door. Apply a bead of silicone between the walls and base of the stall.
- For optimum performance, you should install the shower door perfectly level on a level surface.
- By not leveling the unit during construction the unit may leak causing possible water damage.



PARTS

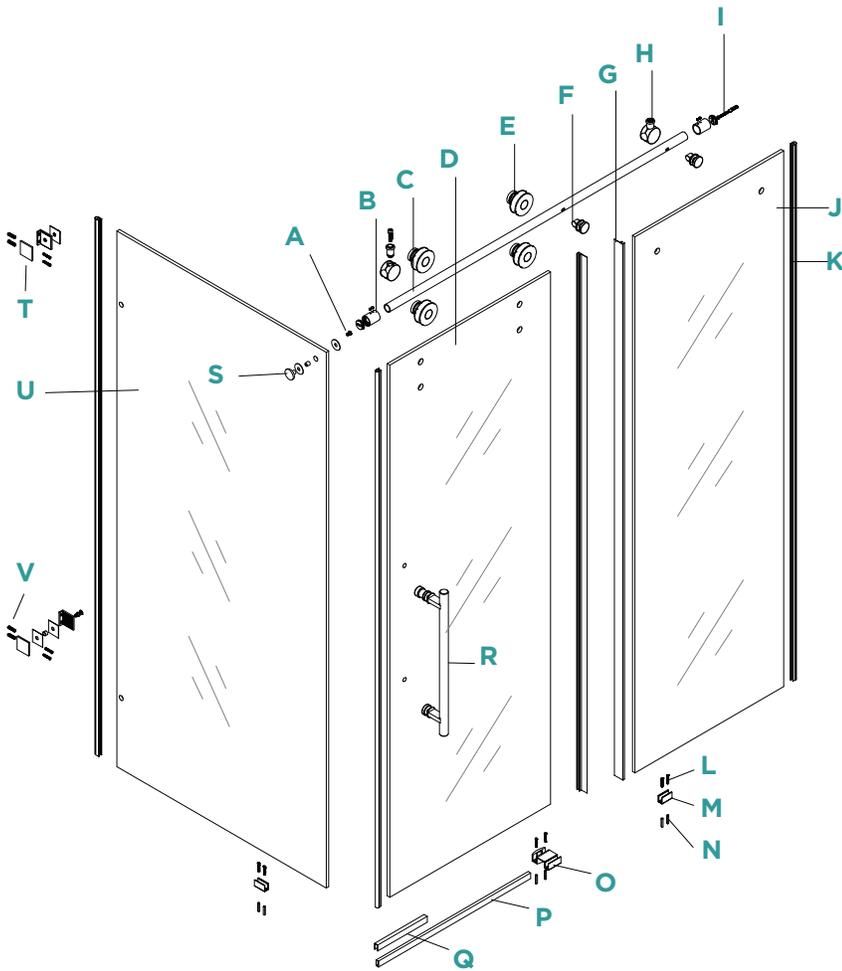


REQUIRED TOOLS



DRILL



LEVEL



SILICON GUN



MEASURE TAPE



FLAT SCREWDRIVER



Ø6 DRILL BIT



PENCIL



PHILLIPS SCREWDRIVER



Ø8 DRILL BIT



ALLEN KEY



UTILITY KNIFE

COMPONENTS AND HARDWARE

During unpacking the product and prior to installation inspect your new product for any damages or missing parts. Do not attempt to install or operate the product if the product is damaged.

Part A		1 Pieces	Allen Key Screw
Part B		2 Piece	Wall Bracket
Part C		1 Piece	Door Rail
Part D		1 Piece	Sliding Door
Part E		4 Piece	Door Roller
Part F		2 Pieces	Panel Holder
Part G		2 Piece	Seal Strip
Part H		2 Piece	Door Stopper
Part I		5 Pieces	ST5 Screw 40mm
Part J		1 Piece	Fixed Panel
Part K		3 Piece	Seal Strip
Part L		6 Pieces	ST4 Screw 20mm
Part M		2 Piece	Panel Clip
Part N		11 Piece	Plastic Anchor
Part O		1 Pieces	Guide Block
Part P		1 Pieces	Door Threshold
Part Q		1 Piece	Threshold Extension
Part R		1 Pieces	Door Handle
Part S		1 Piece	Rail Endcap
Part T		2 Pieces	Door Joint
Part U		1 Piece	Glass Panel
Part V		5 Pieces	Plastic Anchor




1

MEASURING THE FIXED GLASS PANEL


A
Use a measuring tape to measure the width of the fixed glass panel (J, U).

B
Select two points that are of equal distance from the wall and mark them on the floor (or shower base) with a pencil for both panels at 90 degree angle from each other. You will be inserting screws at these marked points.

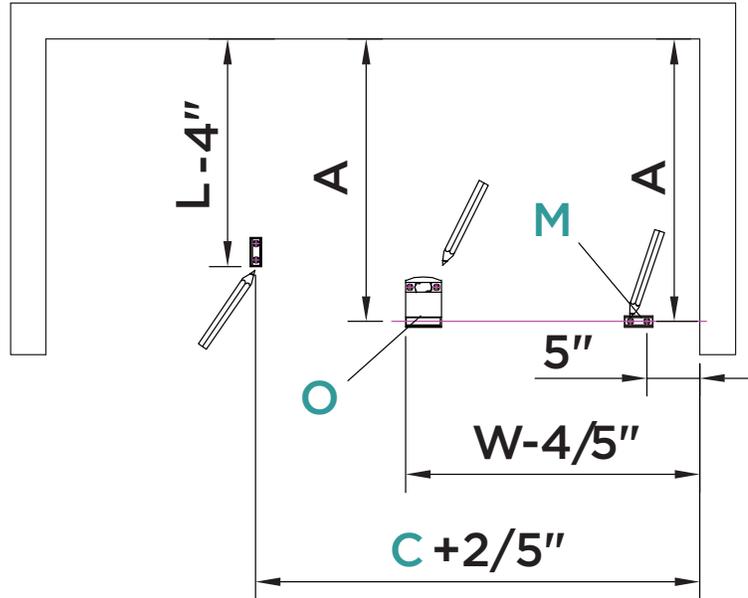

1.1

1.1
Use a pencil and the door bottom guide to mark your screw points on the floor.

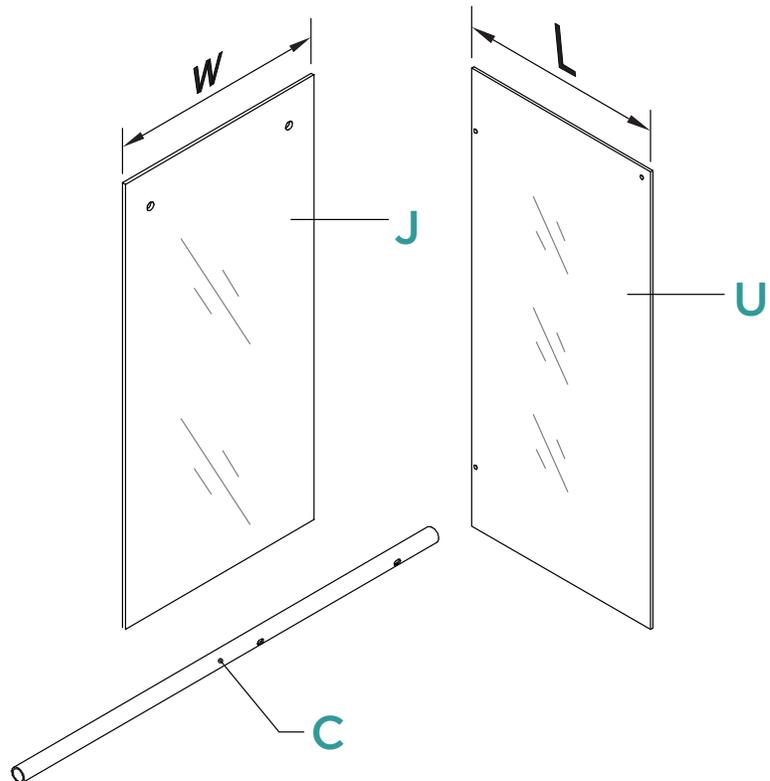



2

ATTACHING THE DOOR BOTTOM GUIDE TO THE FIXED GLASS PANEL

2.1


Use a size 6 drill bit to drill holes at the marked points on the floor.

2.2


Insert the anchors (N) into the drilled holes.

2.3


Holding the door bottom guide (O) and fixed panel clip (M x 2) on the floor, secure them to the floor with screws (L), using a screwdriver.

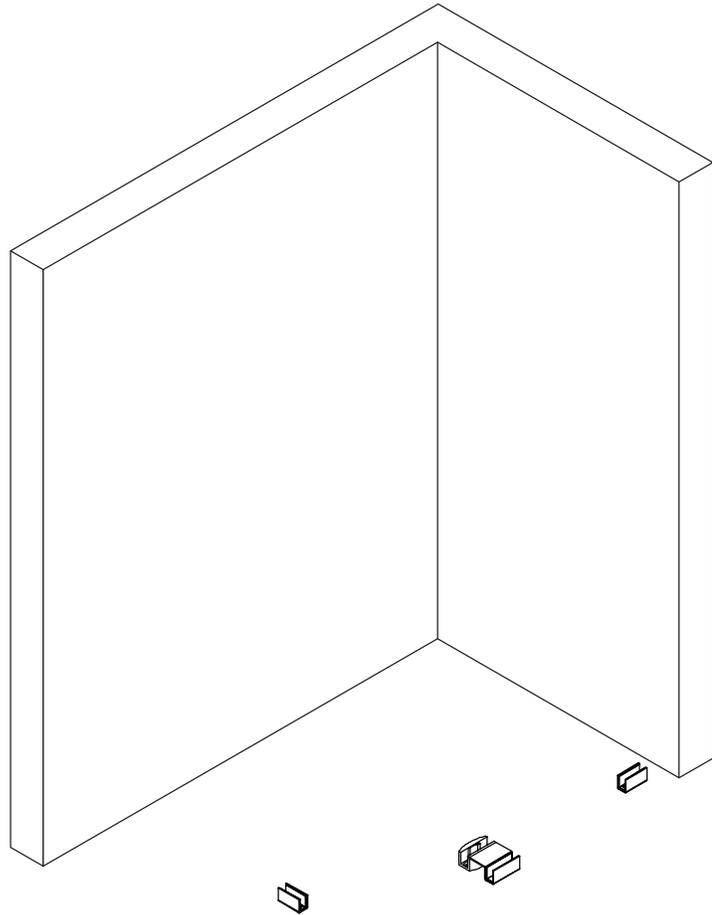


2.1

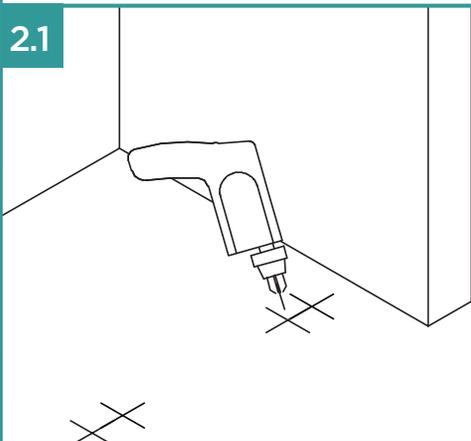

2.2

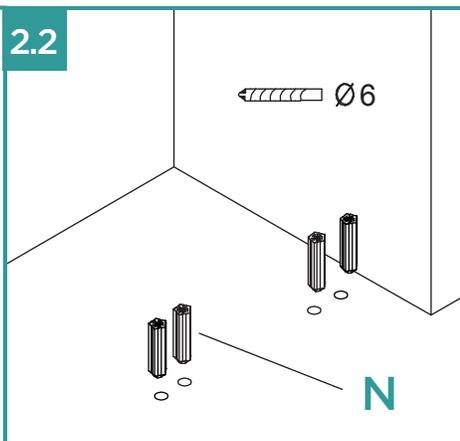

2.3

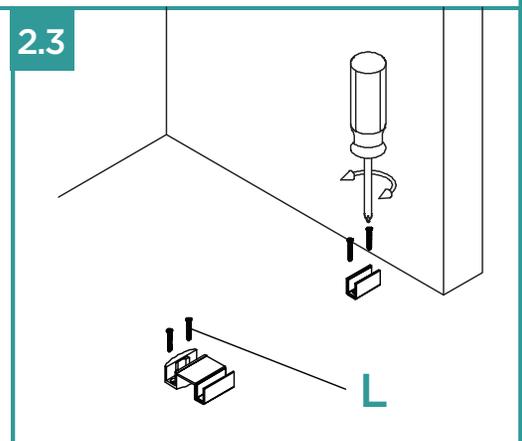



3

SECURING THE SIDE FIXED GLASS PANEL

3.1

Use a pencil to mark the points for the screws in the door joints. Use a size 8 drill bit to drill holes at these marked points.

3.2

Insert the wall anchors (V) into the drilled holes. (Light tapping with mallet may be necessary)

3.3

Attach the joints to the wall by inserting screws (I) into the wall anchors, as shown in the diagram below.

3.4


Attach the plastic seals (K) to the sides of the glass panel.

3.5


Attach the door joints (T) on one side of the panel to attach the panel to the wall.

3.6


Attach the endcap (S) to wall mount bracket (B) using Allen key screw (A) on top of open side of panel (U) attached to wall.

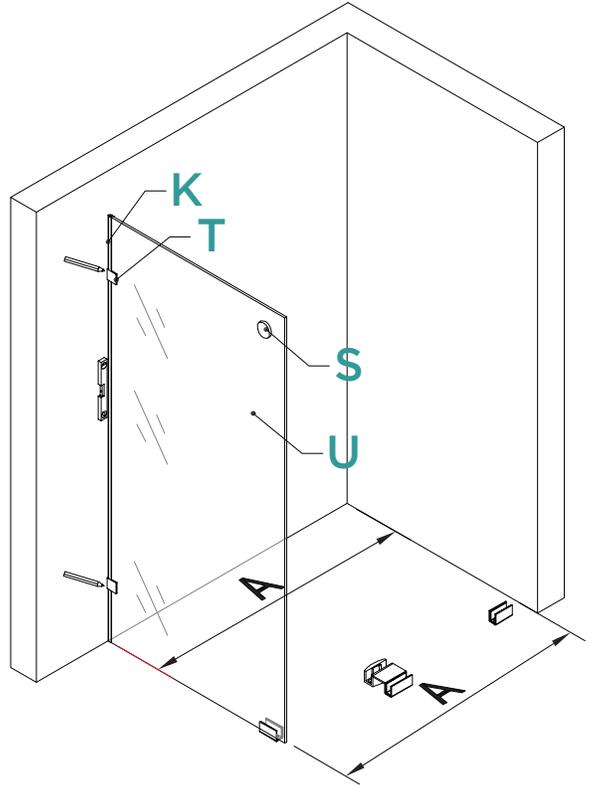


3.1

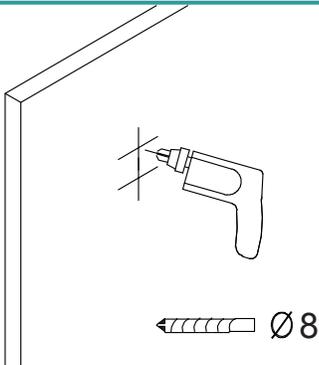


3.2

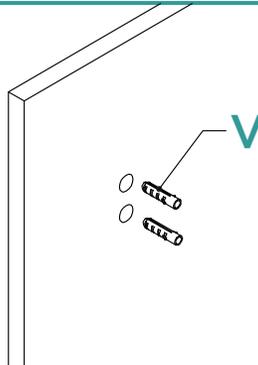


3.3

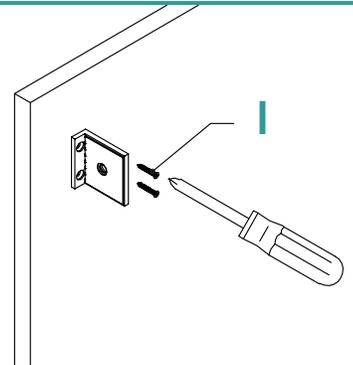


3.4

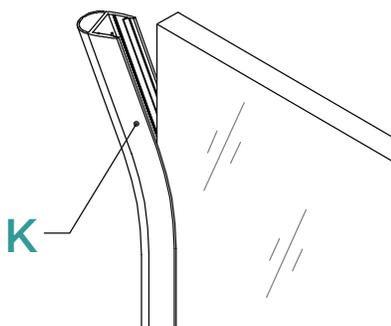

3.5



3.6

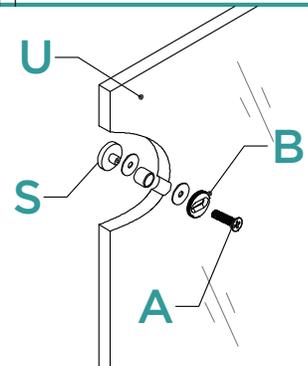



4

PREPARING THE SLIDE BAR

4.1
Insert holders (H) into the slide bar (C), using set screws and the Allen key. One holder should be at a distance of 4 cm (about 1 9/16" inches) from the edge, and the other at a distance of 3 cm (about 1 1/16" inches) from the edge.


4.2
Once the holders are attached, press the stoppers (F) onto the slide bar and remove screws, as shown in the diagram below.

4.3
Insert the wall mount brackets (B) to both ends of the slide bar.


4.4
Attach the slide bar to the fixed glass panel using screws into stoppers (F).

4.5
Attach the plastic seals (G, K) to the fixed glass panel on both sides. If the seal strip is longer than the side of the panel, cut off the extra length at the top.


4.1

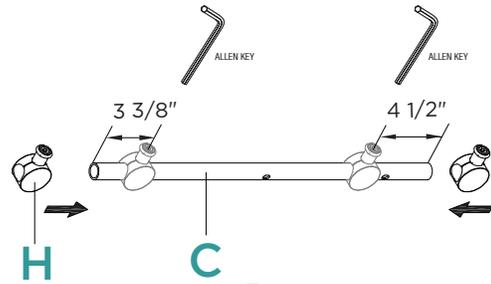


4.2

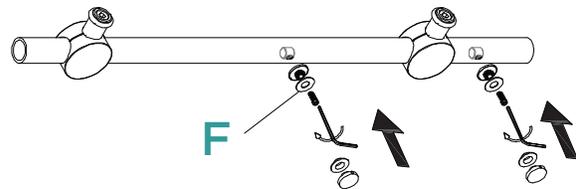


4.3

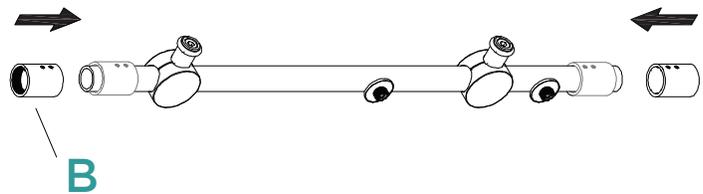

4.4

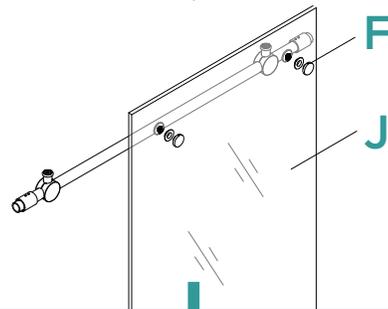

4.5

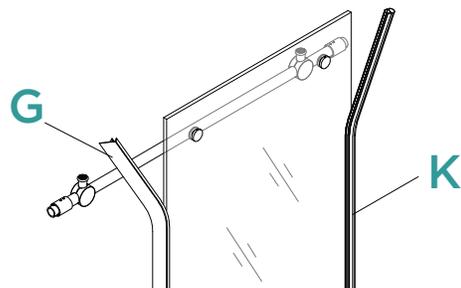



5

ATTACHING THE SLIDE BAR TO THE WALL

5.1

Use a pencil to mark the points on both sides where the slide bar will be attached to the wall.

5.2

Use a size 8 drill bit to drill holes at the marked points.

5.3


Insert wall anchors (V) into the drilled points in the wall. (Light tapping with mallet may be necessary)

5.4


Holding the fixed glass panel on the fixed bottom guide, insert screws (I) into the wall anchors (picture 3). Press the slide bar into the holes.

5.5


Secure it with the Allen key.

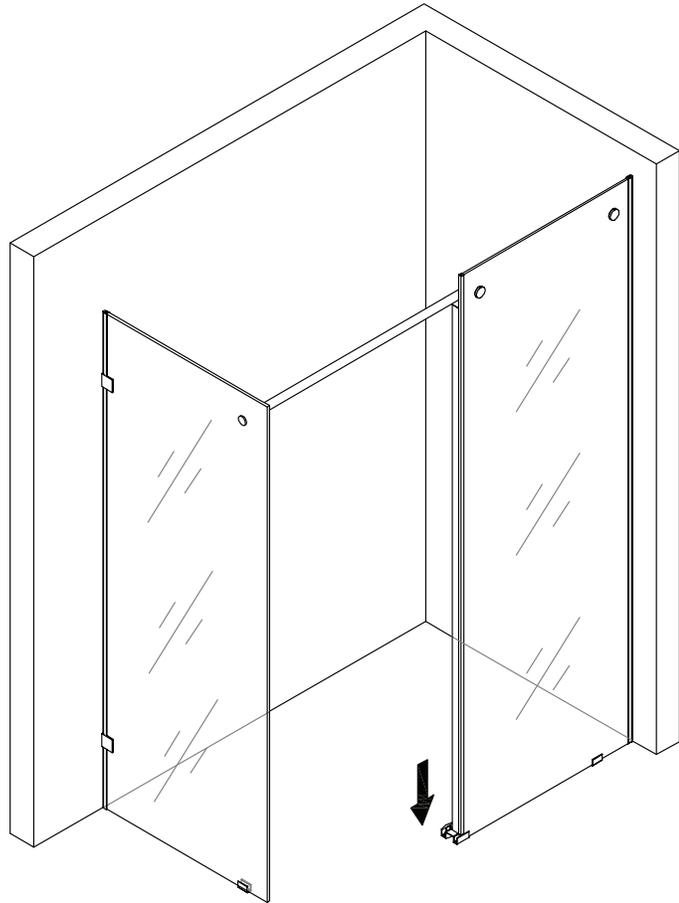


5.1




5.2




5.3



5.4



5.5






6

PREPARE THE SLIDING GLASS PANEL

A
Attach the rolling wheels (E) to the sliding glass panel at the pre-drilled points in the panel, using screws included on rolling wheels.

B
Attach the door handle (R) at the marked points, using screws included with the handle.

C
Attach the plastic seals (G,K) to both sides of the sliding panel.

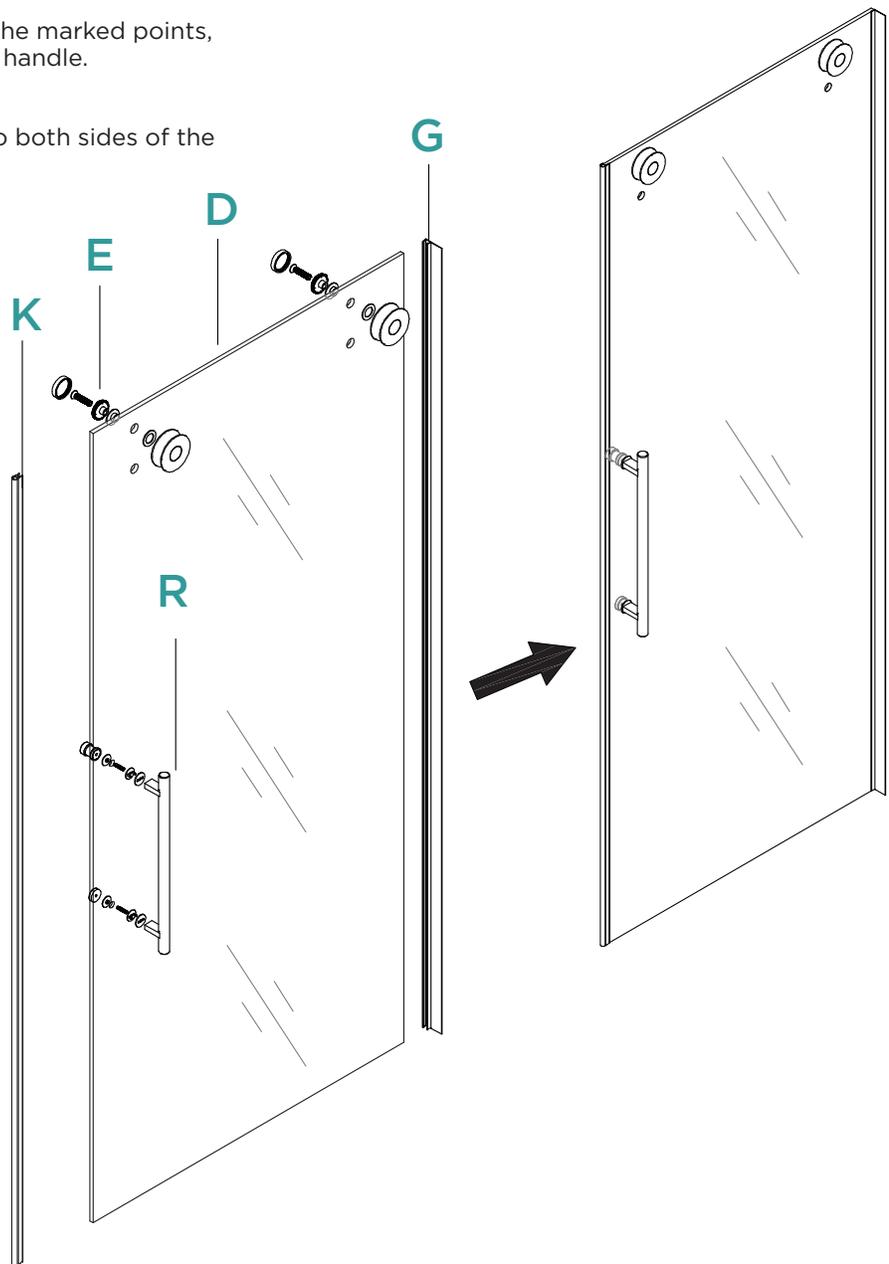



7

ATTACHING THE SLIDING GLASS PANEL

7.1

Attach the sliding glass door to the part of the door bottom guide that is not used by the fixed glass panel.

7.2


Mount the sliding glass door on the slide bar, using the upper rolling wheels.

7.3


Attach the lower rolling wheels to the sliding glass panel at the marked points, using screws included with the rolling wheels.

7.4


Tighten the screws with the Allen key.

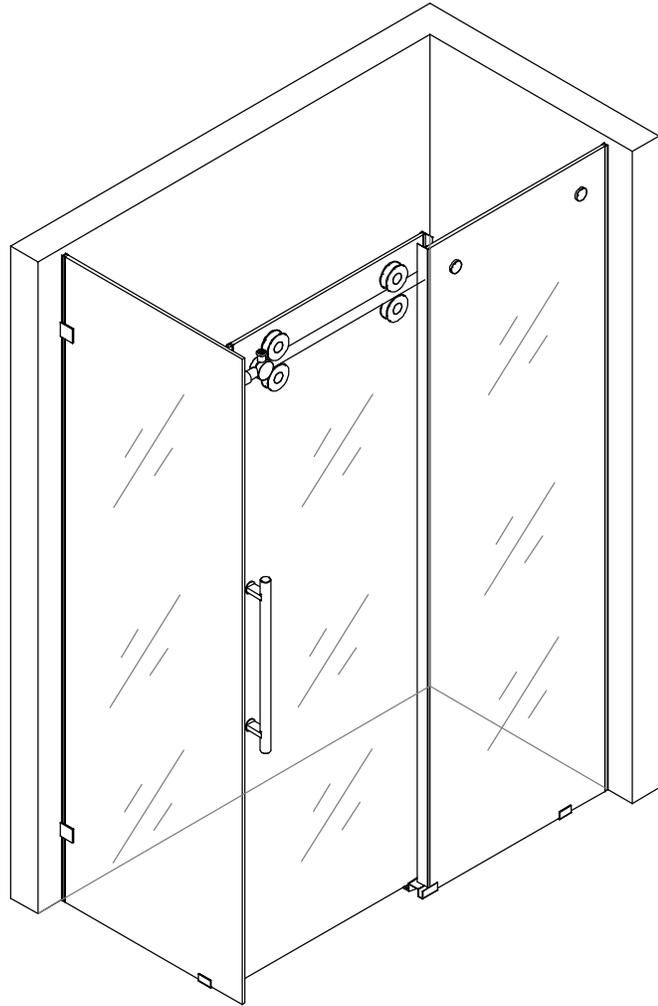


7.1



7.2



7.3



7.4







8

FITTING THE SLIDING PANEL


Attach the plastic seals (P, Q) to the bottom of the sliding glass panel.

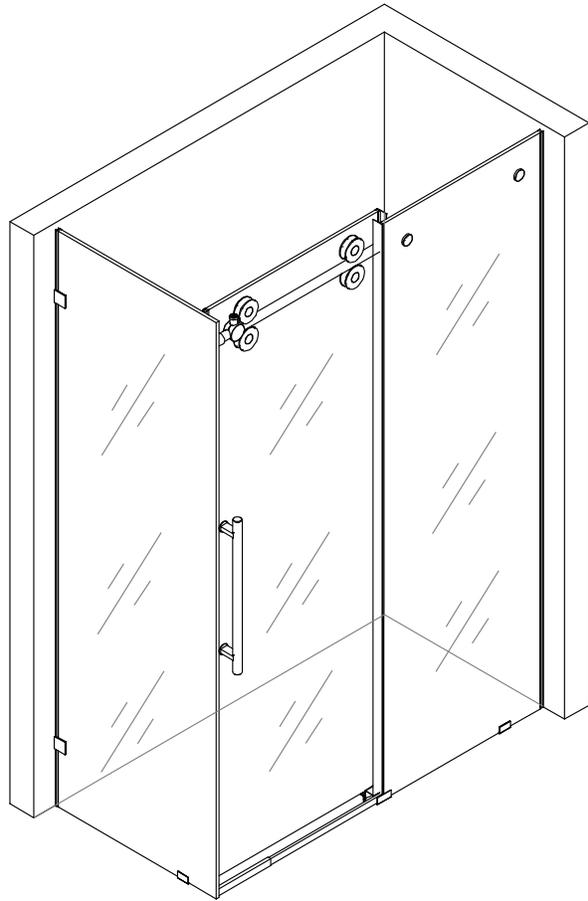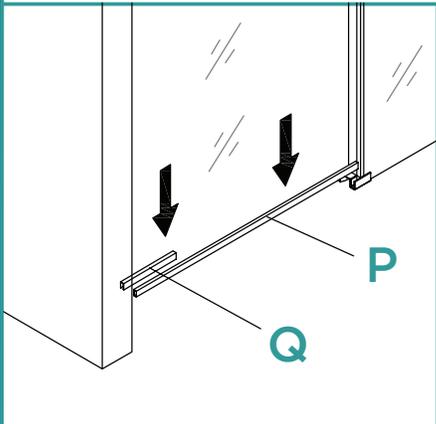

9

SECURING THE SLIDING GLASS DOOR


Secure the sliding glass door, using a caulking gun and high-quality clear silicone caulk.

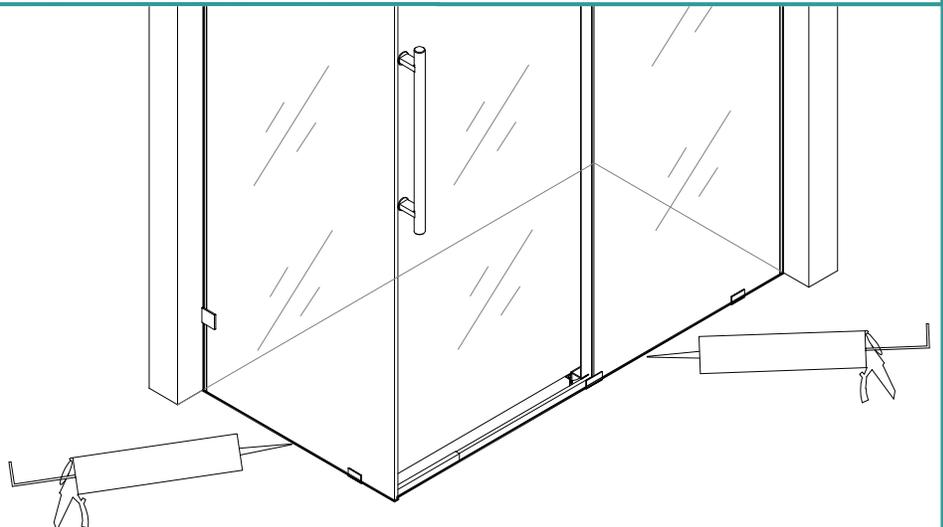



INSTALLTION COMPLETED

Let the glass dry for 24 hours.
Do not touch, move, or make
wet during these hours.

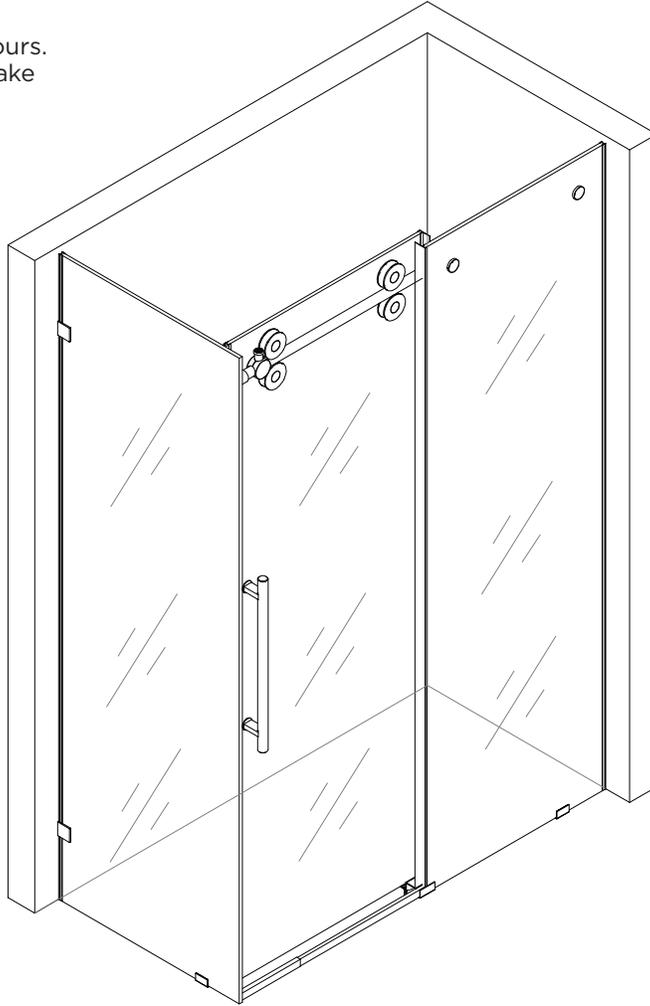

**AFTER
INSTALLATION**



**WAIT 24 HRS
BEFORE USE**



206 WEMBLY ROAD - NEW WINDSOR, NY 12553
P: 718.602.6060 F: 718.963.2082 - E: INFO@FINEFIXTURES.COM
TOLL FREE: 1.877.8FIXTURES

FINEFIXTURES.COM

