


GARDEN TUB FAUCET TRIM

- Classic Series
- Three Hole Installation

Submitted Model No.: _____

Specific Features: _____

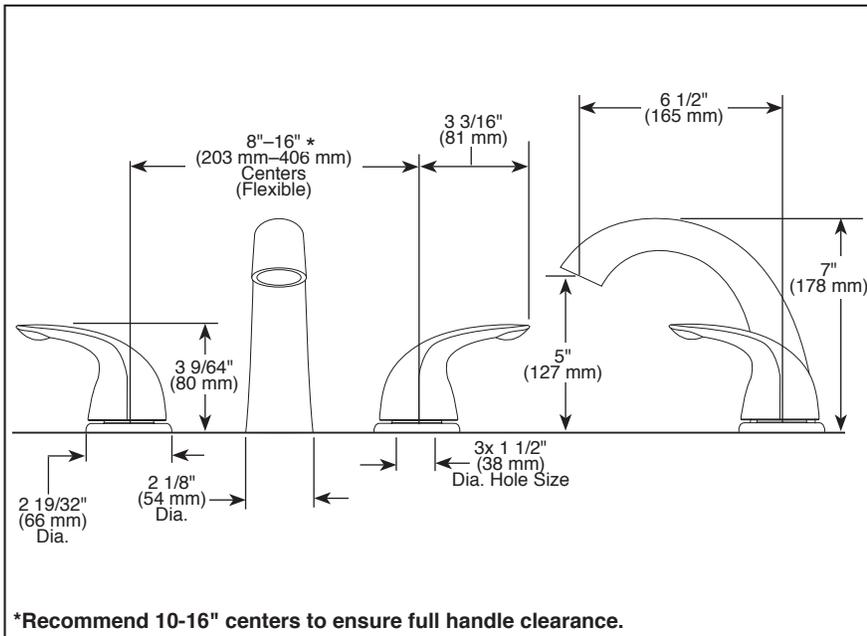

*Recommend 10-16" centers to ensure full handle clearance.

▲ Designate proper finish suffix

STANDARD SPECIFICATIONS:

- Two handle garden tub faucet for concealed mounting
 - Temperature and volume controlled with handles
 - Rough-In kit must also be ordered to complete installation
 - R2700 or R2707 for three hole
 - RP23601 for three hole 10" fixed installation
- There are separate specification sheets on each rough-in kit if more details are required

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1

 Indicates compliance to ICC/ANSI A117.1



Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

DSP-B-T5722 Rev. C

55 E. 111th Street, Indianapolis, Indiana 46280
 350 South Edgeware Road, St. Thomas, ON N5P 4L1
 © 2015 Masco Corporation of Indiana