
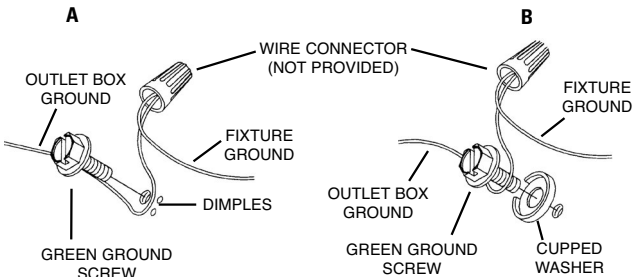


- 1) Take one loose arm, slip hook at end of arm through loop on fixture body.
- 2) Pass threaded pipe on top of arm through hole in top trim.
- 3) Slip lockwasher over end of threaded pipe protruding from inside top trim. Thread hexnut onto threaded pipe. Tighten hexnut to secure arm in place.
- 4) Repeat steps 1-4 for remaining loose arm.
- 5) Take arm with fixture wire, pass fixture wire from top of arm through hole in top trim.
- 6) Pass fixture wire through hole in lockwasher. Thread lockwasher onto end arm protruding from inside top trim. Pass fixture wire through hole in hexnut. Thread hexnut onto end of arm. Tighten hexnut to secure arm in place.
- 7) Pass fixture wire through hole in top plate. Lower top trim down. Pass threaded pipe in center of top trim through hole in top plate.
- 8) Pass fixture wire through hole in coupling. Thread coupling onto threaded pipe protruding from top plate.
- 9) Pass fixture wire through end of stem. Thread end of stem into coupling.
- 10) Pass fixture wire through remaining stems and screw stems together.
- 11) Thread small threaded pipe into end of small loop.
- 12) Pass fixture wire through end of threaded pipe on small loop. Thread small loop onto end of last stem.
- 13) **TURN OFF POWER.**

- NOTE:** Thread locking compound must be applied to all stem threads as noted with symbol (⌘) to prevent accidental rotation of fixture during cleaning, relamping, etc.
- a) Go to the main fuse, or circuit breaker, box in your home. Place the main power switch in the "OFF" position.
 - b) Unscrew the fuse(s), or switch "OFF" the circuit breaker switch(s), that control the power to the fixture or room that you are working on.
 - c) Place the wall switch in the "OFF" position. If the fixture to be replaced has a switch or pull chain, place those in the "OFF" position.
- 14) Take threaded pipe from parts bag and screw in screw collar loop a minimum of 6 mm (1/4"). Lock into place with hexnut.
 - 15) Run another hexnut down threaded pipe almost touching first hexnut. Now screw threaded pipe into mounting strap. Mounting strap must be positioned with extruded thread faced into outlet box. Threaded pipe must protrude out the back of mounting strap. Screw third hexnut onto end of threaded pipe protruding from back of mounting strap.
 - 16) Connect mounting strap to outlet box.
 - 17) Unscrew the threaded ring from screw collar loop. Take canopy and pass over screw collar loop. Approximately one half of the screw collar loop exterior threads should be exposed. Adjust screw collar loop by turning assembly up or down in mounting strap. Remove canopy.
 - 18) After desired position is found, tighten both top and bottom hexnuts up against the bottom and top of the mounting strap.
 - 19) Slip canopy over screw collar loop and thread on threaded ring. Attach chain (with fixture connected) to bottom of screw collar loop. Unscrew threaded ring, let canopy and threaded ring slip down.
 - 20) Weave electrical wire and ground wire through chain links no more than 3 inches apart. Pass wire through threaded ring, canopy, screw collar loop, threaded pipe and into outlet box.
 - 21) Grounding instructions: (See Illus. A or B).


- A) On fixtures where mounting strap is provided with a hole and two raised dimples. Wrap ground wire from outlet box around green ground screw, and thread into hole.
- B) On fixtures where a cupped washer is provided. Attach ground wire from outlet box under cupped washer and green ground screw, and thread into mounting strap.
- If fixture is provided with ground wire. Connect fixture ground wire to outlet box ground wire with wire connector (not provided.) after following the above steps. Never connect ground wire to black or white power supply wires.

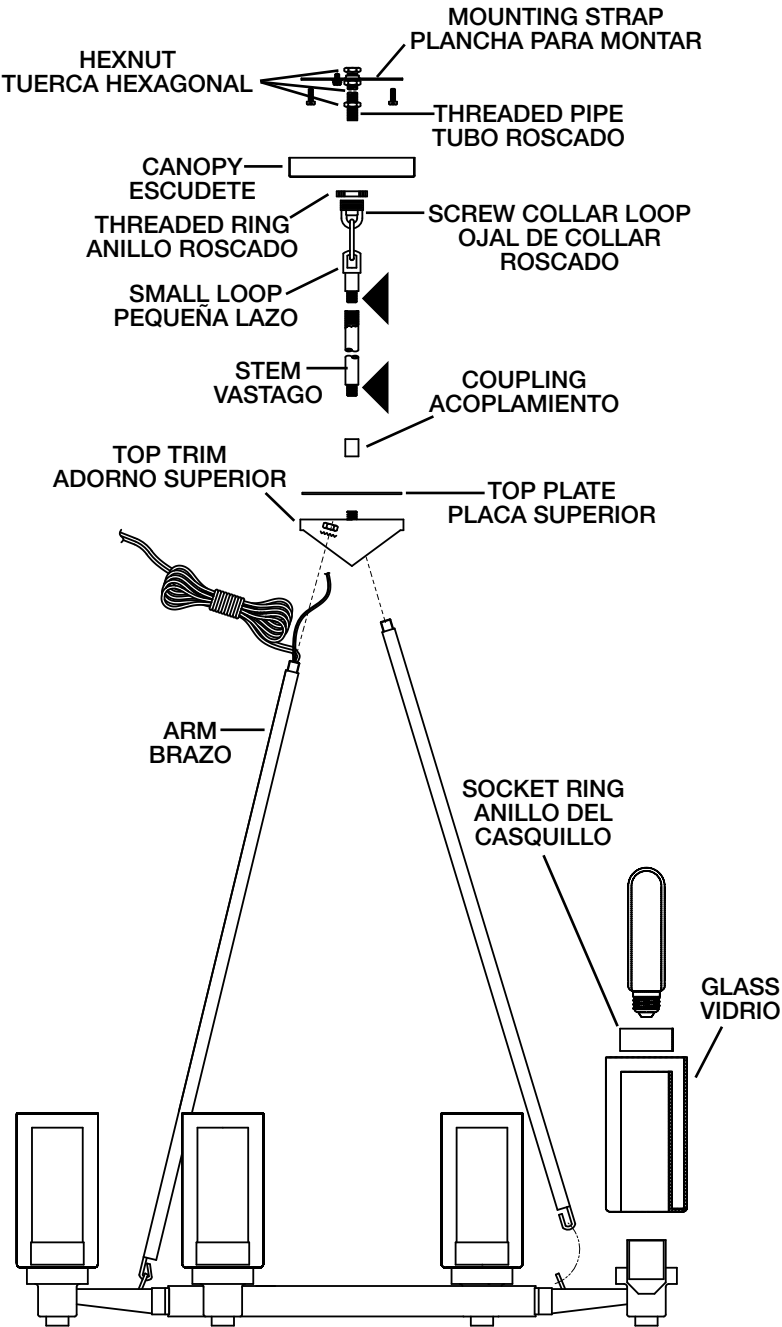

- 22) Make wire connections (connectors not provided). Reference chart below for correct connections and wire accordingly.

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor


*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)



- 23) Raise canopy to ceiling.
- 24) Secure canopy in place by tightening threaded ring onto screw collar loop.
- 25) Lower glass down over socket. Pass hole in glass over socket.
- 26) Thread socket ring onto socket. Tighten socket ring to secure glass in place. (DO NOT over tighten.)

SEE OTHER SIDE FOR SPANISH TRANSLATIONS.
VEA EL OTRO LADO DE TRADUCCIONES AL ESPAÑOL.

- SEE OTHER SIDE FOR ENGLISH TRANSLATIONS.
VEA EL OTRO LADO DE TRADUCCIONES AL INGLÉS**

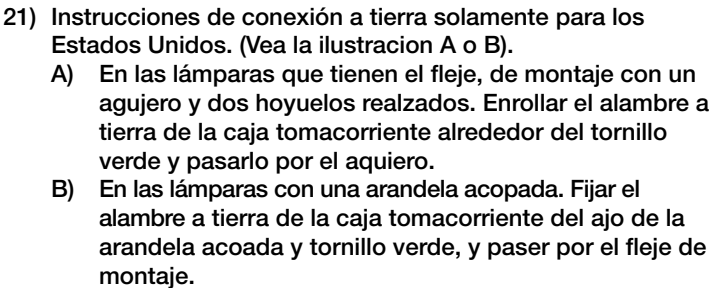

A

TIERRA DE LA CAJA DE SALIDA

CONECTOR DE ALAMBRE (NO SE PROVEE)

TIERRA ARTEFACTO

DEPRESIONES

TORNILLO DE TIERRA, VERDE

B

TIERRA DE LA CAJA DE SALIDA

CONECTOR DE ALAMBRE (NO SE PROVEE)

TIERRA ARTEFACTO

ARANDELA CONCAVA

TORNILLO DE TIERRA, VERDE

- | | |
|--|--|
| Conectar el alambre de suministro negro o rojo al | Conectar el alambre de suministro blanco al |
| Negro | Blanco |
| *Cordon paralelo (redondo y liso) | *Cordon paralelo (cuadrado y estriado) |
| Claro, marrón, amarillo o negro sin hebra identificadora | Claro, marrón, amarillo o negro con hebra identificadora |
| Alambre aislado (diferente del verde) con conductor de cobre | Alambre aislado (diferente del verde) con conductor de plata |

Hilo Neutral

- 23) Levante el escudete hasta el cielorraso.
- 24) Asegure en el escudete en el lugar apretando el anillo roscado en el ojal de collar roscado.
- 25) Ponga el vidrio sobre el casquillo. Pasando el agujero en el vidrio encima del casquillo.
- 26) Rosque el anillo del casquillo al casquillo. (NO apriete excesivamente.)