

ENGINEERING EXCELLENCE

Installation Guide


Two Handle Bar Faucet:

- 5DM100
- 5LG120
- 5LG220

This product meets the following standards:

- ASME A112.18.1
- ANSI A117.1
- ANSI / NSF 61, SECTION 9
- CUPC / IAPMO LISTED / ADA COMPLIANT
- CONTAINS NO MORE THAN 0.25% WEIGHTED
 AVERAGE LEAD CONTENT


(PIONEER)

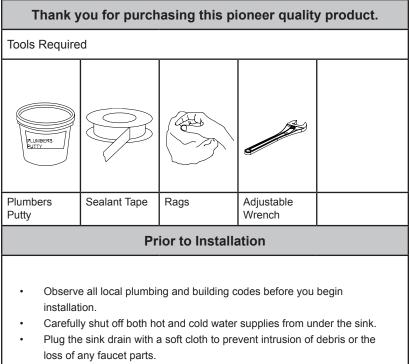

- For replacement installations, carefully remove the existing faucet and clean the entire surface of the sink mounting holes.
- Pioneer reserves the right to make changes in the design of faucets without notice as specified in the pricebook.

Faucet Installation

- Place base plate (A) underneath the faucet.
- Apply adequate amount of plumbers putty or sealant underneath of base plate (A) if necessary.
- Lead the faucet inlet (B) through faucet holes. Make sure 'Pioneer' logo face toward the front and ensure that handles turn in correct direction.
- Slide the mounting washers (C) through faucet inlet (B).
- Thread and hand tighten the mounting nut (D) through faucet inlet (B). Make sure both side of mounting nuts (D) are securely tightened.
- Connect the faucet inlet (B) to inlet supply lines (E). Then connect the supply stop (F) to the inlet supply lines (E) (left is hot water supply and right is cold water supply). Make sure inlet supply lines (E) are securely tighten. Do not over tighten.
- Turn on water. Check for any leaks. Make sure all the connections are secure.
- Remove aerator. Open the handle.
- Flush and allow water to run at full flow for at least one minute.
- Replace aerator.

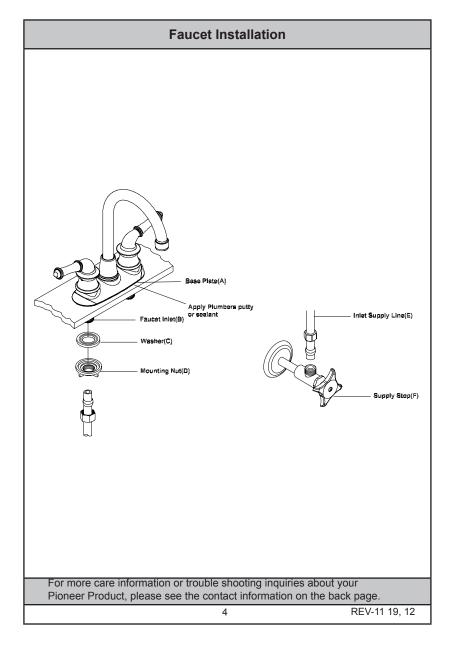



ENGINEERING EXCELLENCE

3325 S. Garfield Ave. | Commerce, CA 90040 Telephone: (800) 338-9468 | (323) 888-8873 | Fax: (323) 888-9515 Hours: M - F, 7:30am to 5:00pm PST www.pioneerind.com