




Family: Piccadilly | Item No. 4756 PL



**Drawing 1 - Fixture Assembly**



**Drawing 2 - Fixture Assembly**

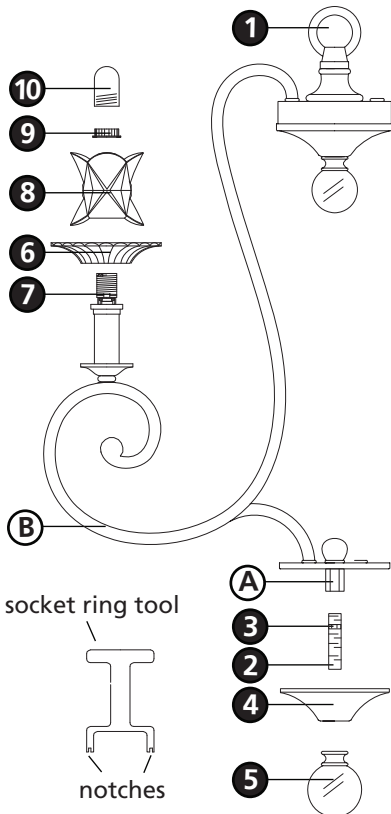

## ▼ start here

**1**

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

**\*\*\* The construction of this fixture will be accomplished by first assembling the main body of the fixture, making all necessary electrical connections, hanging the fixture from the ceiling, and then installing the glass.**

**SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.**

**2**

1. To assemble main body, spread arms (B) of the body assembly (1) until they are equally spaced 60 degrees apart - see **Drawing 1**.
2. Thread center stem (2) into coupler (A) at bottom of body assembly (1) approximately 1/4" - see **Drawing 2**.
3. Thread hex nut (3) up against coupler (A) to lock center stem (2) in place.
4. Slip cap (4) over center stem (2) and hold in place.
5. Thread crystal sphere (5) onto end of center stem (2) to secure cap (4).
6. Please refer to hanging instruction sheet (I.S. 19) provided to hang fixture. Then refer back to this sheet to continue installation of this fixture.

**3**

1. To install glass, slip bobesche (6) over socket (7) - see **Drawing 3**.
2. Place glass (8) over exposed section of socket (7).
3. Thread socket ring (9) onto socket (7) to secure glass (8).
4. Use socket ring tool to tighten socket ring (9). Notches in socket ring fit into notches on socket ring tool. Tighten socket ring until snug. Do not over tighten.
5. Fixture can now be lamped accordingly.
6. Thread glass bulb shield (10) onto socket (7).
7. Repeat steps 1-5 for remaining glass.

Note: Maximum wattage for 4756 fixture is 60 watts G9 Halogen per bulb.

2.7.08