


JOB NAME _____

CONTACT _____

ORDERING CODE _____

ORDERING CODE	
PART NUMBER	350440
DELIVERED LUMENS	13LM 1150 lm Calculated Delivered Lumens = [Delivered Lumen Value] x [CCT Multiplier]
CCT & LM MULTIPLIER	27K 2700K (0.98) 30K 3000K (1.00) 35K 3500K (1.02)
CRI	90 90 CRI
OPTICS	20 20° 38 38° 50 50°
VOLTAGE	120 120V
DIMMING	ELV leading and trailing edge (Triac/ELV) dimming to 5%
FINISH	WH white BK black
MOUNTING OPTION	SMBK surface mount, black SMWH surface mount, white PBK pendant, black PWH pendant, white MPBK monopoint with field cuttable stem, black MPWH monopoint with field cuttable stem, white ECOBK ECO/HALO black ECOWH ECO/HALO white ECOPWH ECO pendant, white ECOPBK ECO pendant, black JUNOBK JUNO, black JUNOWH JUNO, white LGTRBK LIGHTOLIER, black LGTRWH LIGHTOLIER, white GEOPWH GEO pendant, white GEOPBK GEO pendant, black Mounting finish must match fixture finish.
ACCESSORIES	See page 3 for details.

GX15 Cylinder Fixture Multi-Mount

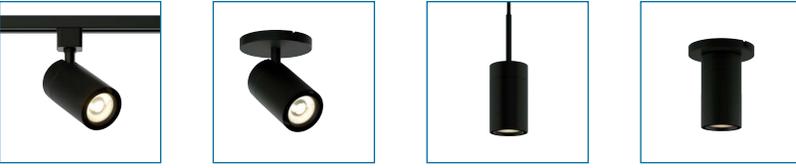

ORDERING CODE _____

Follow the steps to specify your fixture, example:
350440 - 13LM - 30K - 90 - 38 - 120 - ELV - WH - ECOWH

DESCRIPTION
 GX15 is a cylinder fixture with multiple mounting applications with 1150lm at 90+ CRI. The GX15 can be specified as a track spot, canopy spot, surface mount cylinder or a pendant. It features optional lens and glare reduction accessories. It is offered in black or white matte finish.

HOUSING
 Extruded aluminum housing with black or white finish.

MOUNTING

- ECO track / Halo® Power Trac Track, Juno® track, and Lightolier®
- Monopoint with field cuttable stem
- Surface mount or field adjustable flexible cord pendant mounting option
- ECO pendant or GEO pendant mounting option

ELECTRICAL/CONTROLS

- 120Vac, 50-60Hz input, 15W
- Phase dimmable
- Leading and trailing edge (Triac/ELV) dimming to 5%
- 350° rotation, 90° tilt


LED INFO

- LED: Cree Xlamp® CXA1512
- SDCM: 3-step MacAdam Ellipse
- Lumen Maintenance: L₇₀ > 60,500 hrs

LISTINGS


- ETLus Listed to UL1574 (track suitable for dry locations only)
- cETL Listed to CSA C22.2 #9.0

MOUNTING OPTIONS

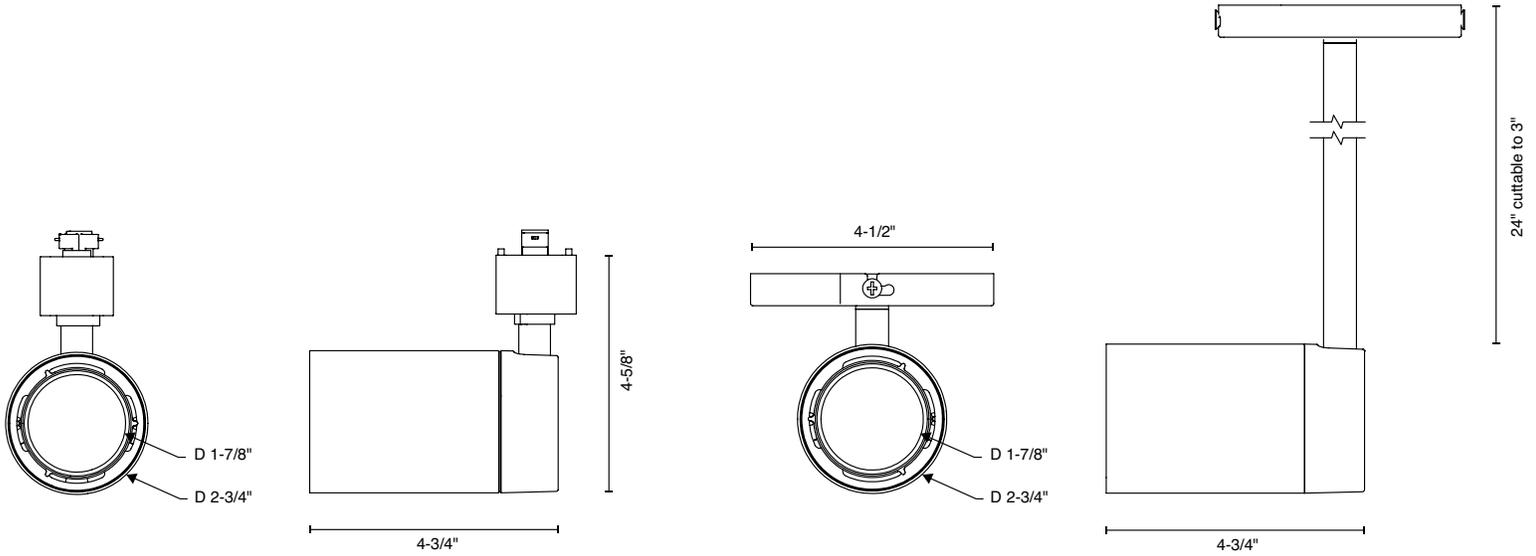

**ECO/HALO®/JUNO®/LIGHTOLIER®
MOUNT**

**MONOPOINT
MOUNT**

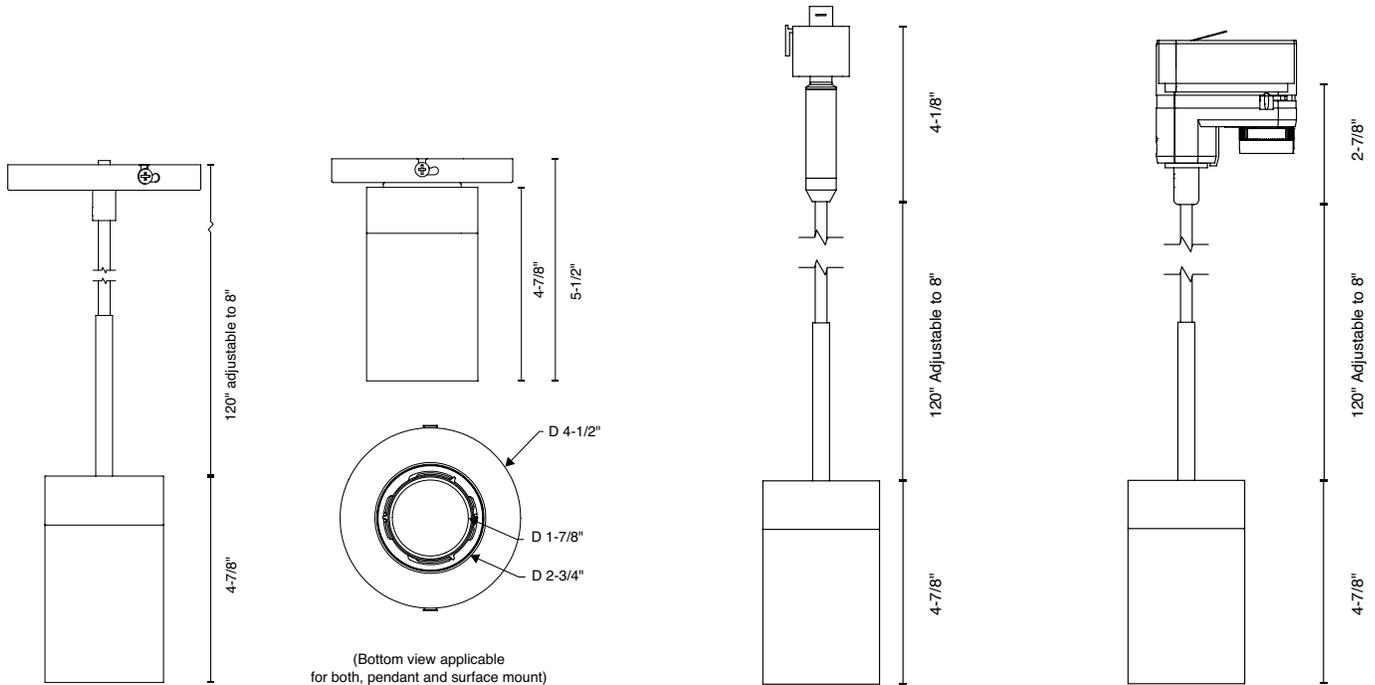

**PENDANT
MOUNT**

**SURFACE
MOUNT**

**ECO
PENDANT**

**GEO
PENDANT**


ACCESSORIES

Follow the steps to specify your fixture, example:
350440 - 13LM - 30K - 90 - 38 - 120 - ELV - WH - ECOWH - 350440/SNOOTBK



Accessories

- 350440/SNOOTBK snoot, black
- 350440/SNOOTWH snoot, white
- 350440/HCLBK honeycomb louver, black
- 350440/HCLWH honeycomb louver, white
- 350440/BDBK barn doors, black
- 350440/BDWH barn doors, white
- 350440/SHNTBK shroud snoot, black
- 350440/SHNTWH shroud snoot, white
- K20272/ECOMPBK ECO canopy, black
- K20272/ECOMPWH ECO canopy, white


ECO CANOPY ACCESSORIES

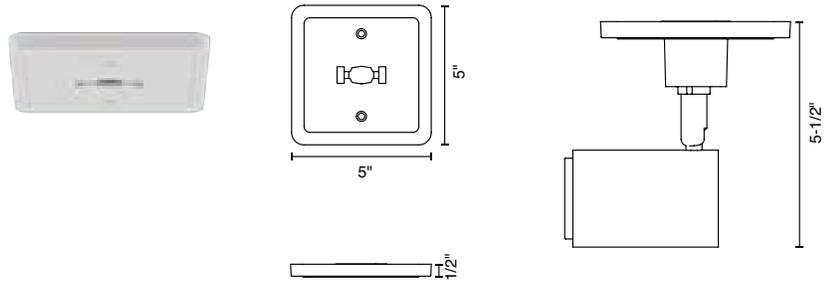


SHROUD SNOOT

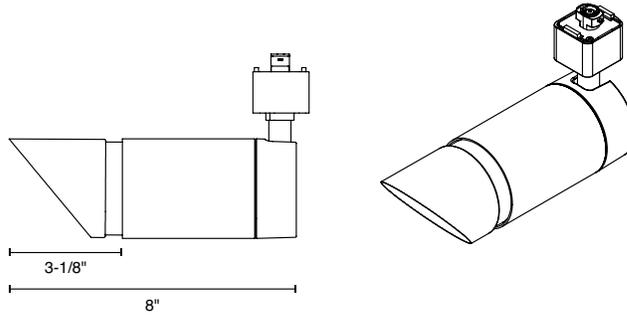

SNOOT

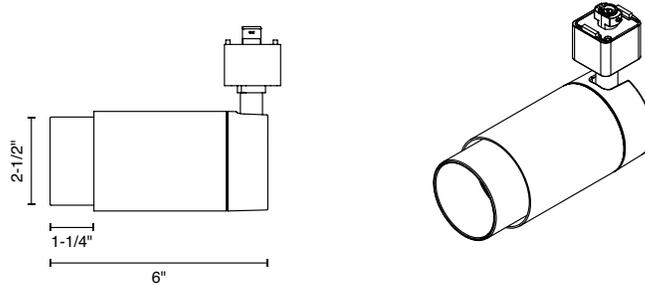

HONEYCOMB LOUVER

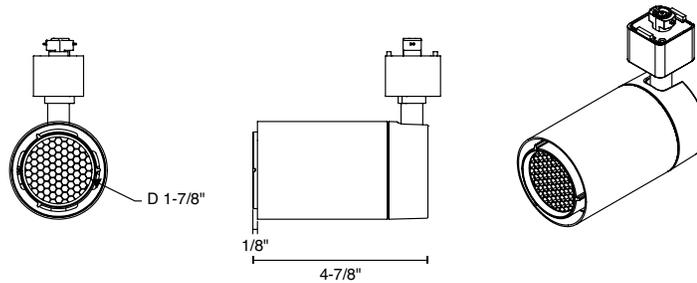

BARN DOORS

