


Carefully unpack all parts and identify them with parts list before attempting to assemble the chair.

IMPORTANT: DO NOT TIGHTEN BOLTS AND SCREWS FULLY UNTIL YOU HAVE COMPLETED THE FINAL ASSEMBLY.

1. Put 5 CASTERS (A) into the holes of 5 STAR BASE (B).
2. Insert GAS LIFT (C) to the center hole top of 5 STAR BASE (B).
3. Attach SEAT PLATE (F) to the Unit Seating(G) by using 4 SCREWS (E) with 4 FLAT WASHERS (E1).
4. Insert the pre-assembled seat unit onto the gas lift to finish the final assembly.
5. Be sure that all the screws are fully tightened before using.

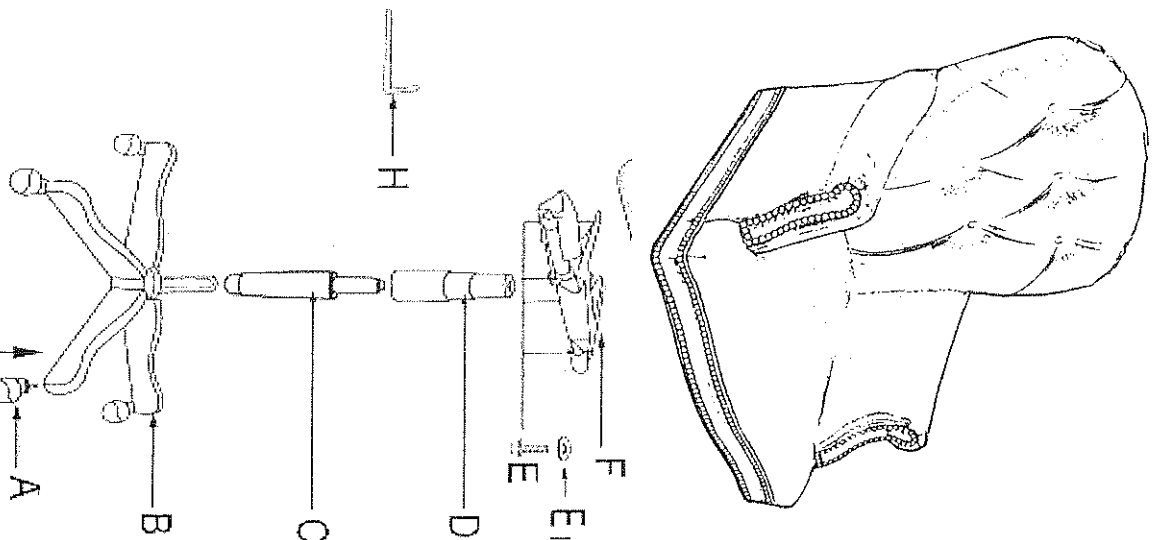

- | | | |
|-----|-----------------------|---|
| A. | CASTERS | 5 |
| B. | 5 STAR BASE | 1 |
| C. | GAS LIFT | 1 |
| D. | BELLOW | 1 |
| E. | SCREWS (5/16X 1-1/2) | 5 |
| E1. | FLAT WASHERS | 5 |
| F. | SEAT PLATE | 1 |
| G. | UNIT SEATING | 1 |
| H. | ALLEN KEY | 1 |