

WARNING

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.
WARNING *** SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.
INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL. ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

















CARE AND MAINTENANCE

To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.
To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean clorth (use clean water, never a solvent) to wipe the interior surface of the fixture.
Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

NOTICE& IMPORTANT SAFETY INSTRUCTIONS


- * Please make sure that you have all parts indicated before you begin assembly of this item
- * This item should be assembled on a soft surface to prevent scratching the finish during assembly
- * To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation
- *The external flexible cable or cord of this lamp cannot be replaced
- *If the cord is damaged, the lamp shall be destroyed

Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY				
A	Canopy		1X	G	Tapping screw		5X				
B	Lamp body		1X	H	Metal plate		2X	PIECE	DESCRIPTION	PICTURE	QUANTITY
C	Wire connector		3X	I	Machine screw		2X	M	Fixator-1		1X
D	Wall plug		5X	J	Mounting screw		2X	N	M3 hex screw		1X
E	Mounting bracket		1X	K	Fixed device		2X	P	M3 allen wrench		1X
F	Ground screw		1X	L	Nut		2X	Q	fixator-2		1X



Model#: JYL7142
Product Dimensions: 62-136"Lx7"Wx3-20"H

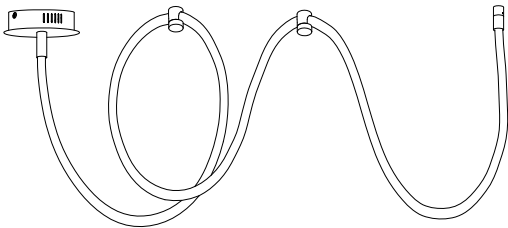


PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product.

Estimated Assembly Time: 30 minutes.

If there are any questions relating to defects, missing parts, assembly issues, replacements, or device connectivity issues, please send a detailed email to cs@jonathany.com

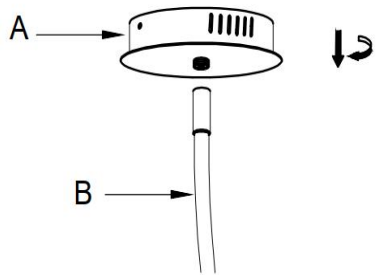


Step1: Assemble the canopy (A) clockwise onto the lamp body (B) until tight.

ENJOY YOUR LAMP

Compatible Dimmer Model:

Brand	Model No.
TP-LINK	HS220
LUTRON	MACL-153M
LUTRON	DVCL-153P
LUTRON	PD-6WCL
LUTRON	P-PKG1W-WH-R
LEVITON	R11-DSL06-1TW
LEVITON	R00-RNL06-0TW
LEVITON	R68-06674-POT
LEVITON	R02-DW6HD-2RW

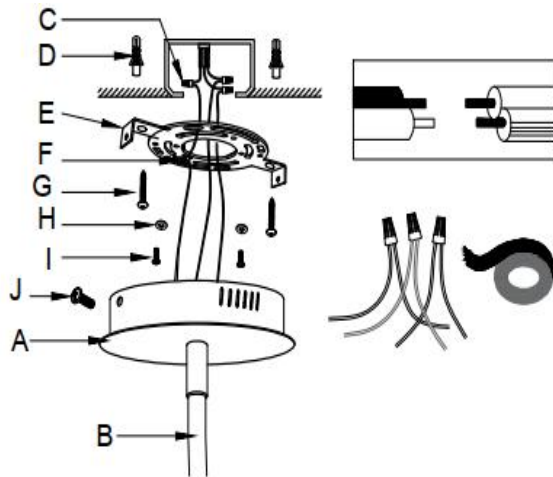

Step 2.1: Punch the hole and install the Wall plug (D) to the ceiling. Fix the mounting bracket (E) to the outlet box with tapping screw (G) and mounting screw (I).

Step 2.2: Wire connection(A) Connect fixture neutral wire (ribbed) to the outlet box neutral wire (usually white) using a wire nut.

Connect fixture hot wire (smooth with markings) to the outlet box hot wire (usually black) using a wire nut.


CAUTION: Do not reverse the hot and neutral connections.

Grounding Instructions:

Wrap ground wire from outlet box around green ground screw(F) on mounting bracket, no less than 2" from wire end.


Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.

Step 2.3: Carefully remove packaging from fixture, adjust wire length to desired mounting height, fix the canopy(A) to mounting bracket(E) using machine screw(J).

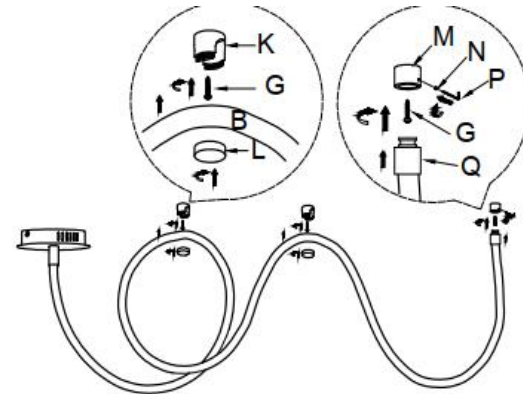

Step 3.1: Use tapping screw (G) to secure the fixed device (K) to the ceiling. put the lamp body (B) inside the fixed device (K), and rotate the nut (L) to hold the fixed device (K) in place.

Step 3.2: Use tapping screw (G) to secure the fixator-1 (M) to the ceiling. put the fixator-2 (Q) inside the fixator-1 (M), and rotate the hex screw (N) with the allen wrench (P) to hold the fixator-2 (Q) in place.

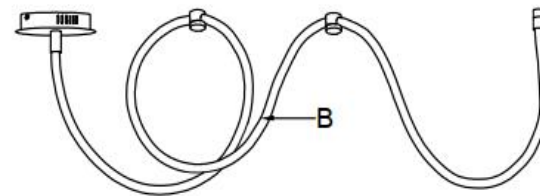

Step 4: Adjust the lamp body (B) to make it beautiful.