

Project:

Type:

Quantity:

Note:

SKU#: LIN - 24V - ____ - ____ - 30K - ____

Description

A tubular frosted glass diffuser paired with a stamped steel back plate. The Lino Vanity adds contemporary styling to any space.

Features

- Stamped Steel construction
- Frosted glass tube diffuser
- Rear-mounted driver fits inside standard 4" junction box
- Damp location rated
- JA8-2016 Listed




Specifications (Standard)

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K (standard)
- Fixture Wattage: 20W
- Input Voltage: 120VAC 50/60Hz
- Delivered Lumens: 1609 Lm (measured at 3000K)
- Fixture Weight: 2.8 lb. (1.4 kg)
- Standard Backplate: S4 - 4.6" x 4.6" x .5"
- Dimming: TRIAC dimmable
- For recommended dimmers, see <http://www.blackjacklighting.com>


Options

- Upgradable to 120-277V input driver with Universal Dimming
- Available in 2700K, 3000K, 3500K, and 4000K Color Temperatures
- Special Order Paint Finishes: BL - Matte Black, BZ - Bronze, or SG - Satin Gold
- Optional Deep Backplate (DB) - 4.6" x 4.6" x 1.3"

Dimensions

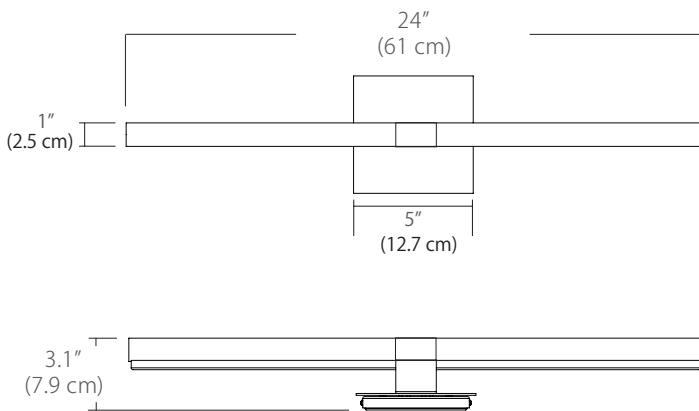

(Shown above with Standard S4 Backplate)

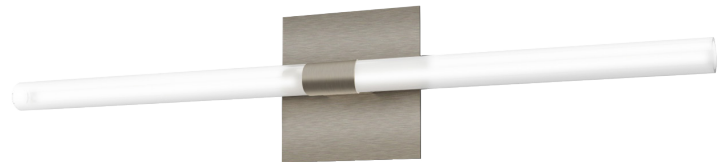

Shown Above:

LIN-24V-SN-12T-30K-S4

ORDERING GUIDE

Family	Size	Finish	Volts/Dimming	Color Temp.	Backplate
LIN	24V			30K	
LIN Lino	24V 24" Vanity	Standard SN Satin Nickel Special Order BL Matte Black BZ Bronze SG Satin Gold	12T 120VAC TRIAC Dimming 27U 120-277VAC Universal Dimming (12T Standard)	27K 2700K 30K 3000K 35K 3500K 40K 4000K (30K Standard)	DB Deep Backplate (Standard) (Driver located in backplate) S4 4.6" Shallow Backplate (Driver located inside junction box) (DB Standard)

Example: LIN-24V-PC-12T-30K-S4

Finishes

Finish	
SN	
BL	
BZ	
SG	

SN - Satin Nickel

BL - Matte Black

BZ - Bronze

SG - Satin Gold

Standard Finish

Special Order Powder Coat Finishes

Volts/Dimming

Volts/Dimming	
12T	
27U	

12T: Input: 120V , Dimming: TRIAC (Standard)

27U: Input: 120-277V , Dimming: TRIAC/ ELV/ 0-10V (Special Order)

Color Temperature

Color Temp.	
27K	
30K	
35K	
40K	

27K - 2700K

30K - 3000K (Standard)

35K - 3500K

40K - 4000K

Backplates

Backplates	
S4	
DB	

Front Plate

5" 12.7 cm

4.6" 11.7 cm

3.1" 7.9 cm

Driver

Standard Backplate

S4 - 4.6" Shallow Backplate (4.6" H, 4.6" W, .5" D) - Driver located inside junction box

Front Plate

5" 12.7 cm

4.6" 11.7 cm

1.3" 3.3 cm

3.9" 9.9 cm

Driver

Special Order Backplate

DB - Deep Backplate (4.6" H, 4.6" W, 1.3" D) - Driver located inside backplate