



WYNDHAM COLLECTION




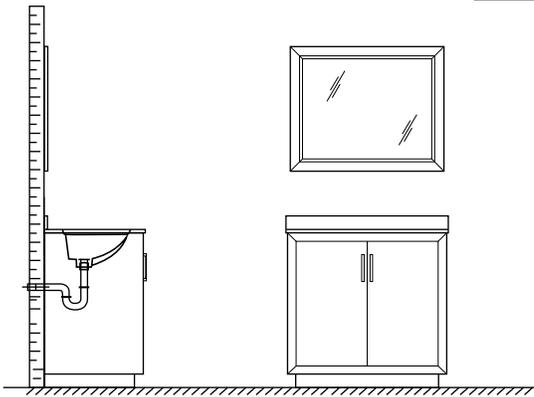


- Prior to installation please check received items against the "Packing List". Please report any missing items to your retailer immediately.
- Protect all surfaces from sharp objects, high heat sources, direct prolonged sunlight and chemical hazards.
- Professional installation recommended.
- Please install on a level surface. If minor door and drawer alignment is required, please follow the easy directions below.




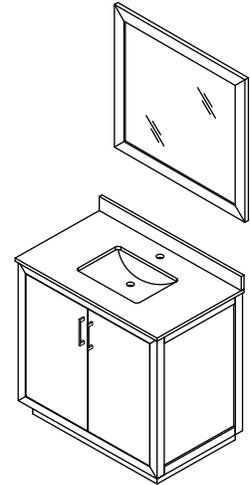


PACKING LIST



(Not all components may be included, depending upon your purchase)

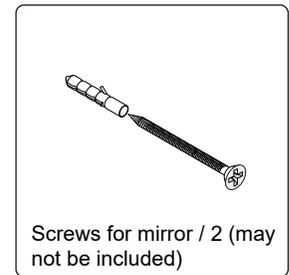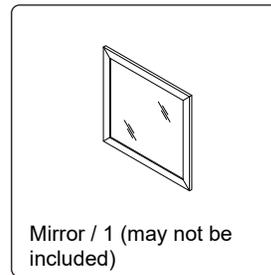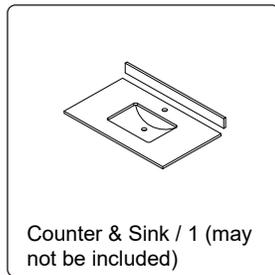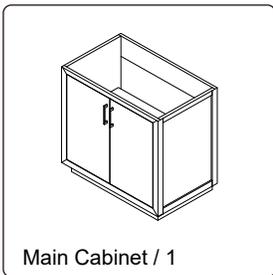

HOW TO ADJUST HINGES (if required)




REQUIRED TOOLS NOT IN BOX




WC-4141-36-SGL Installation Guide

WYNDHAM COLLECTION


INSTALLATION INSTRUCTIONS

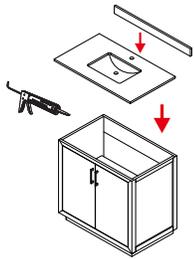


① Install the counter. Seal around the top of the cabinet with clear silicone sealant. Do not over apply. Allow to dry 24 hours for proper curing.

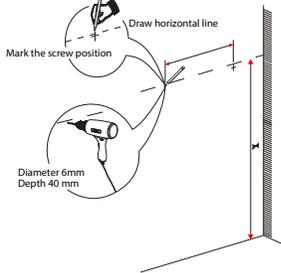

② Install the mirror: use a pencil to mark the placement of the screw holes on the wall, drill the holes and insert the plastic wall anchors.

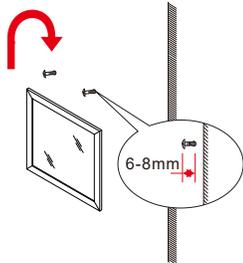


③ Install the screws into the wall anchors, leaving enough of the screw exposed to hang the mirror - approx 1/4" - 1/2".

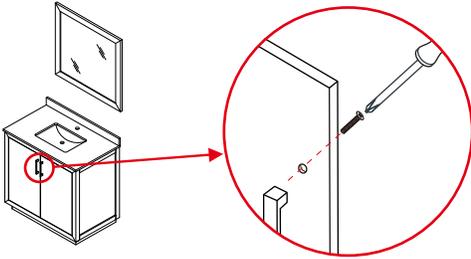

④ Remove the handles from inside the cabinet doors and drawers and reinstall on the outside. Do not over tighten when reattaching.

HOW TO ADJUST DRAWER SLIDES (if required)

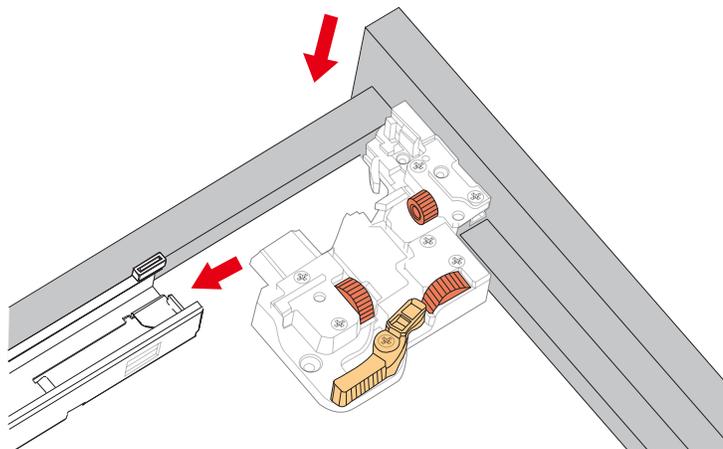

Up and Down Adjustment




Short, for door handles Long, for drawer handles


⑤ Short screws are for the door handles and long screws are for the drawer handles.

WC-4141-36-SGL Installation Guide


WYNDHAM COLLECTION

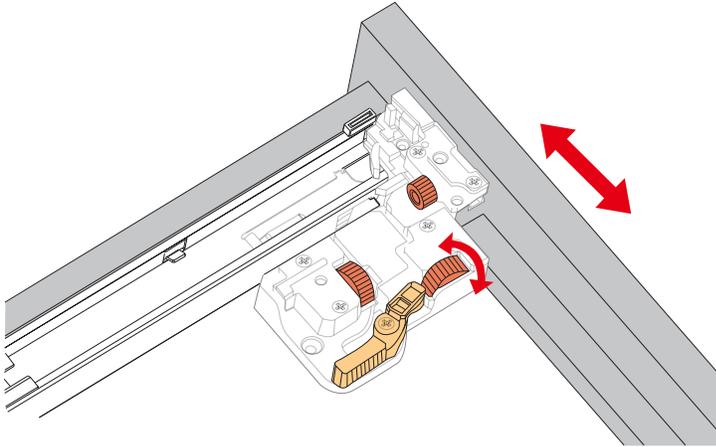

Side Adjustment

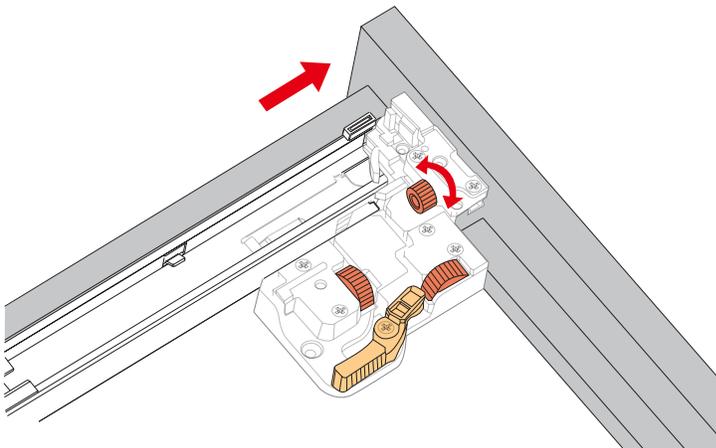

Depth Adjustment




Scan the QR code with your phone to watch detailed video instructions or visit www.wyndhamcollection.com/3dslides

WC-4141-36-SGL
Installation Guide

WYNDHAM COLLECTION


Backboard Cutouts

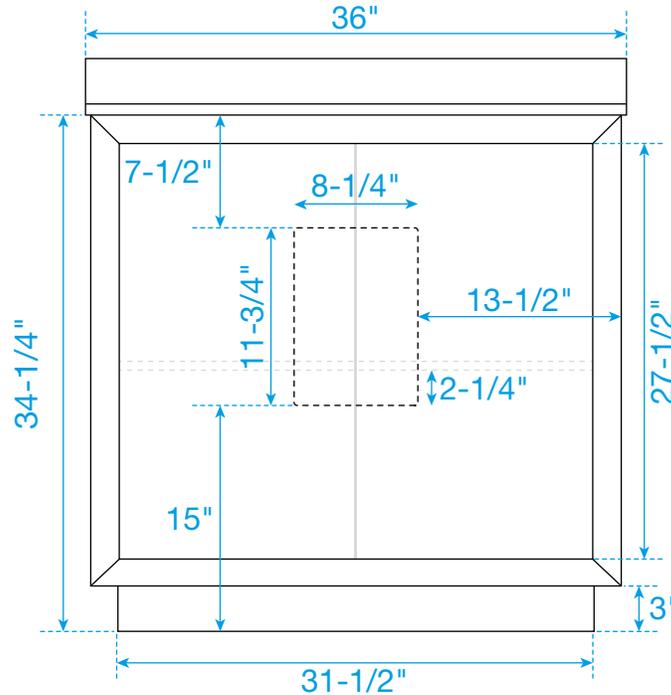

*Note: All measurements are $\pm 1/4$ ".

Electrical Outlets with Charging Hub

- Easy to install
- Long 5 foot plug in cord
- 2 electrical outlets, 125V 15A
- Tamper Resistant (TR) outlets
- Power reset switch
- 2 USB ports, 5V 2.1A Max
- Use with ground-fault circuit interrupter (GFCI) outlets only
- Residential use only
- Follow all applicable electrical codes
- ETL Listed
- Conforms to UL Standard 962A
- Certified to CAN/CSA Standard C22.2 No. 308

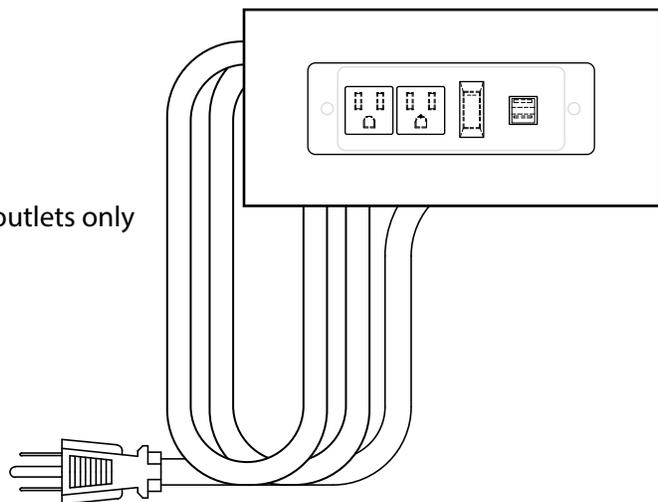

WC-4141-36-SGL Installation Guide