


# ASSEMBLY AND INSTALLATION INSTRUCTIONS

C0278 / C0279

**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

**NOTE:** 1. Before installing, consult local electrical codes for wiring and grounding requirements.  
2. READ AND SAVE THIS INSTRUCTIONS.

## Hardware Package (included):

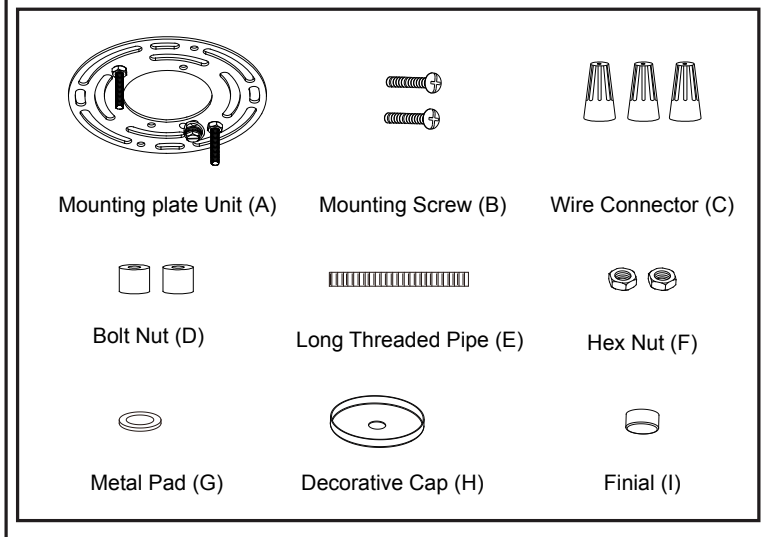


## Installation Steps

Turn off the power at fuse or circuit box

1. Attach the mounting plate unit (A) to the outlet box by using two mounting screws (B).
  2. Pull out the source wires from the outlet box. Make wire connections using wire connectors (C) as follows:
    - Connect the hot wire (black insulation) from the power source to the black wire from the fixture.
    - Connect the neutral wire (white insulation) from the power source to the white wire from the fixture.
    - Attach the fixture ground wire (bare wire) to the mounting plate with the green ground screw, or connect to the source ground wire if available.Carefully put the wires back into the outlet box.
  3. Attach the fixture onto the mounting strap unit (A) and tighten it with two bolt nuts (D).
  4. Install 2 x 60W Max. medium base bulbs (not included). See relamping label at socket area or packaging for maximum wattage allowed.
  5. Attach the long threaded pipe (E) to coupling, then secure the preinstalled hex nut (F).
  6. Attach the hex nut (F) and the metal pad (G) to the long threaded pipe (E), slip the acrylic diffuser and decorative cap (H) up through the long threaded pipe (E), then secure them with the finial (I).
- NOTE:** The depth of the lower hex nut (F) and the metal pad (G) in long threaded pipe may need to be adjusted to properly fit the acrylic diffuser. The acrylic diffuser should be flatly laid on three brackets, and the frosted side of the acrylic diffuser should be faced down.


Turn on the power at fuse or circuit box

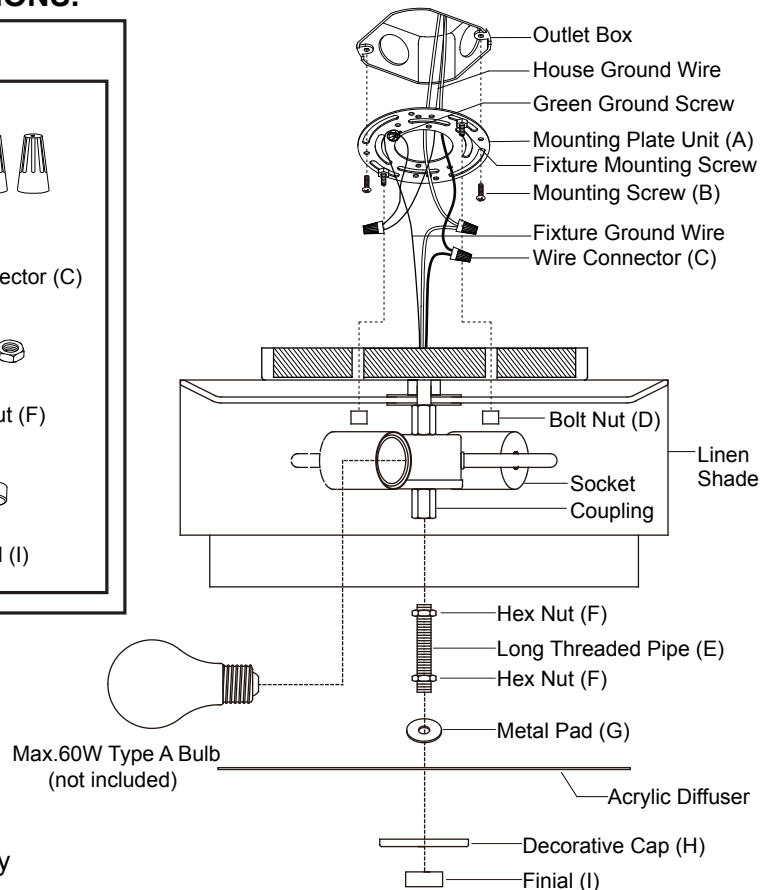


Max.60W Type A Bulb  
(not included)

The following parts are available for re-order if damaged or missing.


**Spare Parts List:**




Mounting plate Unit (A)



Mounting Screw (B)




Wire Connector (C)




Bolt Nut (J)


→ Mounting Hardware  
6578MM (1SET) for C0278  
6580MM (1SET) for C0279




Long Threaded Pipe (E)




Hex Nut (F)



Metal Pad (G)




Decorative Cap (H)




Finial (I)

→ Mounting Hardware  
6579MM (1SET) for C0278  
6581MM (1SET) for C0279



Acrylic Diffuser  
10328AC

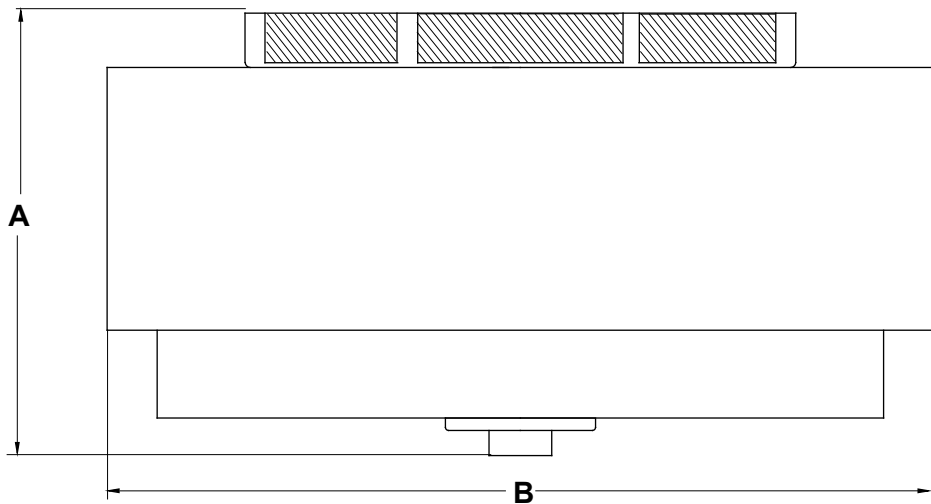


The diagram shows a side view of the acrylic diffuser. It is a rectangular block with a smaller rectangular section at the bottom center. On top of the main block, there are three shaded rectangular sections. Dimension A is indicated by a vertical arrow on the left, spanning the height of the main block. Dimension B is indicated by a horizontal arrow at the bottom, spanning the width of the main block.

**A: 6-3/4"**

**B: 13"**

Page 2 / 2



VAXCEL  
221102