

Three-light Bath

 Wall mounted • Damp location listed **PROGRESS LED**


P300291-009-30

Description:

Fall in love with this innovative bath light. Classy, etched glass shades are aligned in a linear fashion. Each shade features a diffuser at its bottom constructed from glass. The shades are held in place by a sleek modern frame that is ready to help turn your home into the perfect environment for a relaxing staycation.

Specifications:

- Brushed Nickel (-009) (Plated)
- Steel Construction
- Etched Glass Sheet
- Classy, etched glass shades are aligned in a linear fashion.
- Each shade features a diffuser at its bottom constructed from glass.
- The shades are held in place by a sleek modern frame that is ready to help turn your home into the perfect environment for a relaxing staycation.
- Ideal for any bathroom.
- Perfect for transitional, modern, or contemporary settings.
- Measures 20-1/2-inch width by 5-inch height.
- Uses three LED bulbs that are included (10w max).
- Able to be fully dimmable with dimmable bulbs.
- Includes installation instructions and mounting hardware.
- Progress Lighting products are designed for exceptional quality, reliability, and functionality.
- Canopy covers a standard 4" octagonal recessed outlet box
- Mounting Backplate for outlet box included
- 6" of wire supplied
- Complies with "Americans with Disabilities Act" - ADA
- ENERGY STAR® qualified
- Meets California Title 24 JA8-2016

Performance:

Number of Modules	3
Input Power	10w per module
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	per module
Lumens/LPW (Delivered)	1508/50 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	50,000 (L70/TM-21)
FCC	FCC Title 47, Part 15, Class B
Min. Start Temp	-30 °C
Warranty	5-year limited warranty
Labels	cETLus Damp location listed
	ENERGY STAR® qualified
	Meets California Title 24 JA8-2016

Images:



Dimensions:

Width: Depth: 3-7/16"
 Height: 5"
 H/CTR: 2-1/2" (glass facing up)

Width: 5-5/16"
 Height: 0-1/8"

Photometrics:


P300291-009-30

ELECTRICAL DATA	P300291-009-30
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	
Input Power	10
Power Factor	
THD	<20%
FCC	FCC Title 47, Part 15, Class B
Operating Temperature	-30 °C to
Dimming	Yes*

*See Dimming Notes for more information

P300291-009-30

LED Light Engine: 3000 K 90 CRI
System Wattage: 10
Fixture delivered lumens: 1488
Fixture Efficacy: 48.9
Spacing Criteria: 3.89 | 2.04 | 1.20

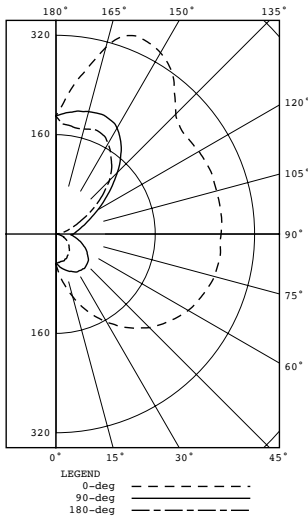

Test 19.01182 Test Date 06/25/19

CANDELA DISTRIBUTION

CANDELA	DISTRIBUTION					FLUX
	0.0	45.0	90.0	135.0	180.0	
0	48	48	48	48	48	
5	65	60	51	47	46	5
15	104	88	60	47	45	19
25	145	116	67	44	42	37
35	182	142	71	40	37	57
45	213	162	70	33	30	75
55	236	178	63	26	24	90
65	253	189	52	19	16	100
75	264	195	38	11	8	104
85	266	195	27	3	2	102
90	266	193	28	1	0	
95	268	194	32	5	3	103
105	268	196	43	18	15	108
115	268	197	63	40	37	114
125	263	201	96	73	76	122
135	273	225	140	113	122	131
145	323	267	182	146	154	130
155	343	292	204	166	177	106
165	311	271	204	174	175	63
175	226	216	196	181	177	19
180	190	190	190	190	190	

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	62	4.1
0-40	118	8.0
0-60	283	19.0
0-90	589	39.6
90-120	326	21.9
90-130	448	30.1
90-150	709	47.7
90-180	898	60.4
0-180	1488	100.0

P300291-009-30

Dimming Notes:

P300291 is designed to be compatible with many Triac/ELV controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls

Leviton 6672

Leviton 6674

Lutron NTEVL-300

Lutron DVELV-300P

Lutron DVCL-253P

Lutron TGCL-153-PH-WH

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation.

Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.