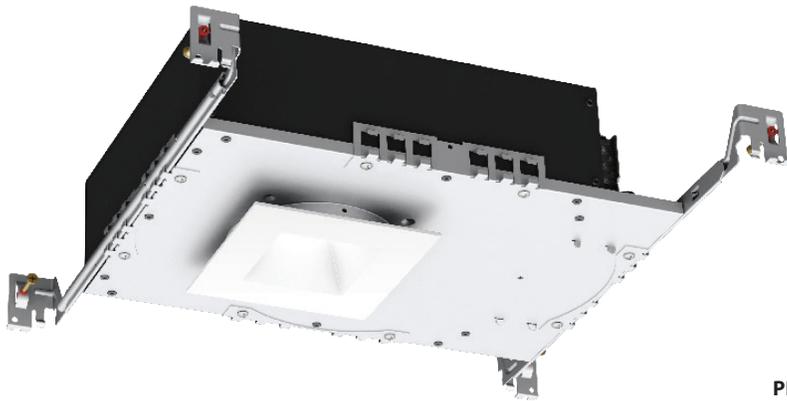


# AETHER

## 3.5" LED Shallow Housing

# WAC LIGHTING

Responsible Lighting®



Fixture Type:

Catalog Number:




Project: \_\_\_\_\_

Location: \_\_\_\_\_

### PRODUCT DESCRIPTION

Designed to fit in tight plenum

### TRIMS (ORDER HOUSING SEPARATELY)

		<b>HR-3LED-T120-WT</b> <i>Round</i>
		<b>HR-3LED-T720-WT</b> <i>Square</i>
		<b>HR-3LED-TL220-WT</b> <i>Round Trimless</i>
		<b>HR-3LED-TL820-WT</b> <i>Square Trimless</i>

### FEATURES

- Energy Star® rated
- Wet location listed for trims
- 3.5" trim aperture, 3.5" housing height
- 35° cut-off angle
- Universal input voltage (120V-277V)

### SPECIFICATIONS

**Construction:** Powder coated finish on die-cast aluminum.

**Dimming:** 100% - 10% with 0 - 10V dimmer (120V - 277V)

100% - 15% with Electronic Low Voltage (ELV) dimmer (120V only)

**Input:** 120V-277V AC

**Light Source:** Bridgelux Vero 10

Total power consumption of 22.5W with included driver


**Mounting:** Retention clips firmly hold trim to housing.

**Finish:** White (WT) powder coat paint.

**Standards:** ETL & cETL Listed, Airtight, Wet location.

**Ceiling thickness:** 1/2" - 1 1/2"

### HOUSINGS

	Beam	Max CBCP	Max Lumen	Color Temp	CRI
 	<b>HR-3LED-H20A</b> <i>New Construction</i> <i>IC-Rated, Airtight</i>				
	N 25°	4480	1375	<b>27</b> 2700K	85
	F 40°	2555	1315	<b>927</b> 2700K	90
<b>HR-3LED-H20AC</b> <i>New Construction</i> <i>IC-Rated, Airtight</i> <i>Chicago Plenum</i>					
				<b>30</b> 3000K	85
				<b>930</b> 3000K	90
				<b>35</b> 3500K	85
				<b>40</b> 4000K	85



Example: **HR-3LED-H20AC-F-930**

wacighting.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122

Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91760

# AETHER

## 3.5" LED Shallow Housing

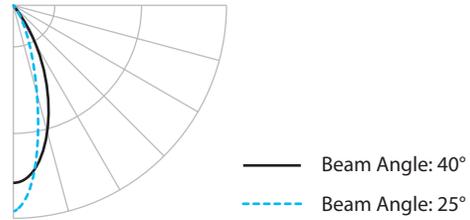
# WAC LIGHTING

Responsible Lighting®

### FIXTURE PERFORMANCE

Beam Angle	Color Temp	CRI	Lumens	CBCP
25°	2700K	85	1190	4405
	2700K	90	1000	3910
	3000K	85	1200	4465
	3000K	90	1005	3600
	3500K	85	1185	4260
	4000K	85	1335	4775
40°	2700K	85	1140	2360
	2700K	90	1025	2080
	3000K	85	1185	2465
	3000K	90	950	1910
	3500K	85	1175	2345
	4000K	85	1265	2520

### PHOTOMETRY



waclighting.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122

Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91760