


CELANO V2™

FP8062B
52" Ceiling Fan**

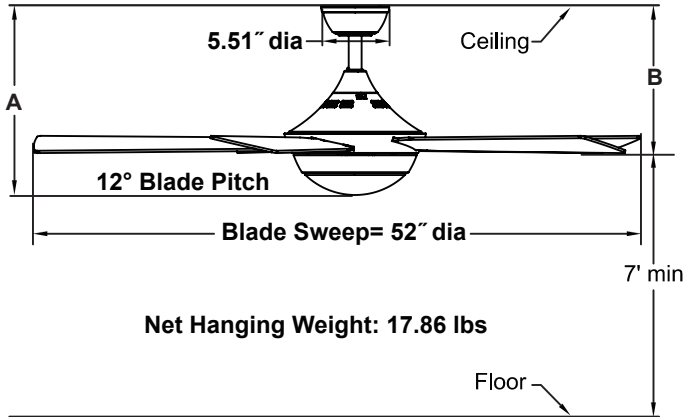

	A	B
Fan w/4.5" downrod	14.71"	11.10"
Fan w/12" downrod	22.21"	18.60"
Fan w/18" downrod	28.21"	24.60"
Fan w/24" downrod	34.21"	30.60"
Fan w/36" downrod	46.21"	42.60"
Fan w/48" downrod	58.21"	54.60"
Fan w/60" downrod	70.21"	66.60"
Fan w/72" downrod	82.21"	78.60"

Available Finish	
BN	Brushed Nickel with reversible Cherry/Dark Walnut Blade and Opal Frosted glass
DZ	Dark Bronze with reversible Cherry/Dark Walnut Blade and Opal Frosted glass
MW	Matte White with Matte White Blade and Opal Frosted glass

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

172 x 17 AC motor is designed for optimal performance with this fan.

BLADES:

A set of five 22.5" plywood blades is included.

LIGHTING OPTIONS:

One 18-watt dimmable LED included.

CONTROL OPTIONS:

TR500 hand-held remote control is included. Push button remote control with variable fan speeds, infinite light levels and off button. Optional CWRL4**, WC2WH and WR501WH wall controls, BTCR9, CRL4WH hand held remote controls and BTR9 and WFR50 receiver are available —sold separately. Instructions are provided with each control.

DOWNROD OPTIONS:

Fan comes with 1" dia. x 4.5" long downrod (DR1-45). Optional downrods available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan must use 12" or longer downrod, and can be mounted on a sloped ceiling up to 19°. Most sloped ceiling installations require a downrod longer than the standard 4.5" downrod. Optional close-to-ceiling kit is available as well—sold separately. Optional sloped ceiling kits (SCK1-52) are available for up to 42°. Call technical support for more information.

LOCATION USE:

Fan is rated for dry location only.

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	174	5596	93	0.51	60
Med	106	3525	139	0.33	25
Low	53	1896	203	0.20	9

Light Bulb Information (120V)					
Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
LED	18	1	1400	3000	90%

Energy Guide FTC			
Power (W _{ave})	Total Air Delivery (CFM _{ave})	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
38	3402	11	90%