
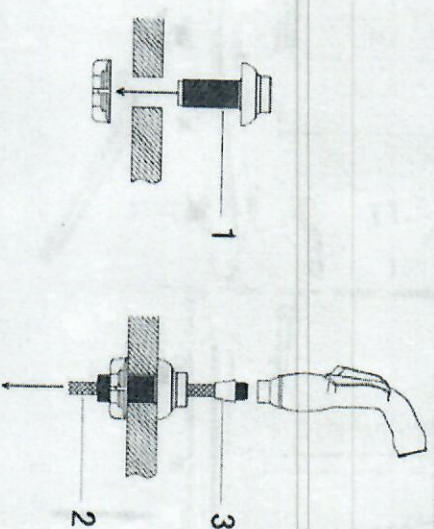
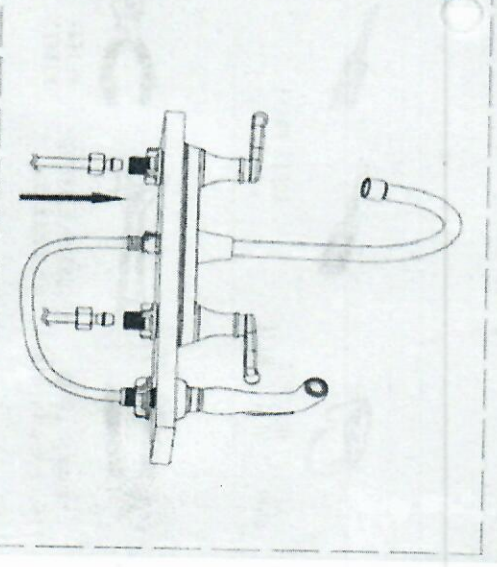
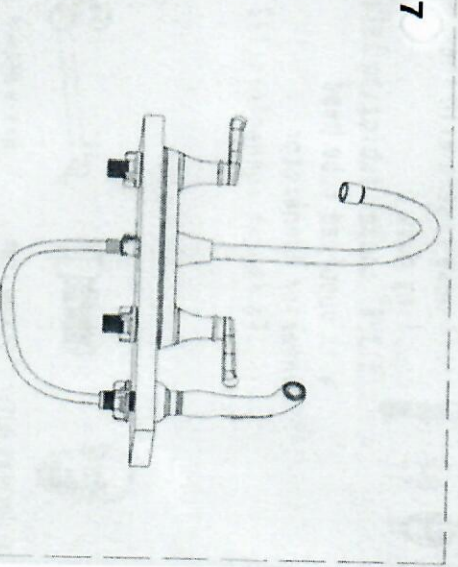



ADDECOR

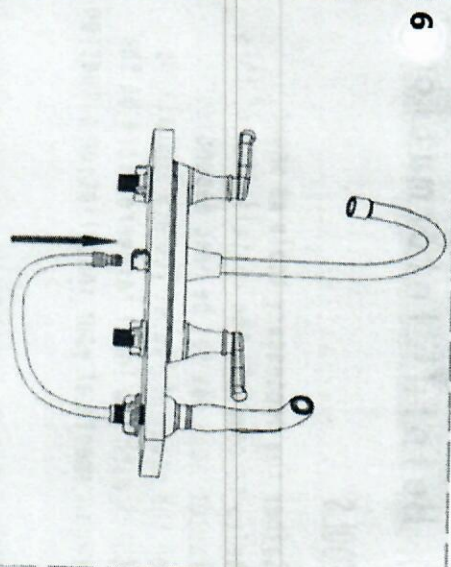


Spray Hole Installation

- Insert spray hose assembly (1) to far right hole on sink. Hand tighten with nut from underneath.
- Insert spray hose (2) down hose assembly.
- Connect male end (3) with spray and hand tighten.

Assembly



Mounting



- Clean installation site, remove any debris from the area.
- Remove mounting nuts (4) and nut gaskets (5) while keeping deck gasket (6) attached.
- Pull spray hose (1) through sink center hole and connect with faucet diverter (8).

- Place faucet onto sink and attach nut gasket (3) then mount nuts (5) tightly to secure.

Test system for LEAKS



Maintenance:.....
Simply rinse the surface with clear water or mild liquid detergents (if necessary). Dry the faucet with a clean soft cotton cloth. Do not use any cleaning agents containing acids, polish abrasives, or harsh cleaners.