

WARNING

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.
WARNING *** SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.
INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL. ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.














CARE AND MAINTENANCE

To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.
To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.
Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

NOTICE& IMPORTANT SAFETY INSTRUCTIONS


- * Please make sure that you have all parts indicated before you begin assembly of this item
 - * This item should be assembled on a soft surface to prevent scratching the finish during assembly
 - * To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation
 - *The external flexible cable or cord of this luminaire cannot be replaced
- If the cord is damaged, the luminaire shall be destroyed

Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Mounting Plate		1X	H	Mounting Screw		2X
B	Canopy		1X	I	Wire Nut		3X
C	Hanging Loop		1X	J	Lamp Body		1X
D	Canopy Nut		1X	K	Loop		1X
E	Chain		1X	L	Lamp Shade		1X
F	Closable Link / cap		2X	M	bulb		1X
G	Nut		3X				



Model#: JYL9930
Product Dimensions: Ø12.5”X19”H

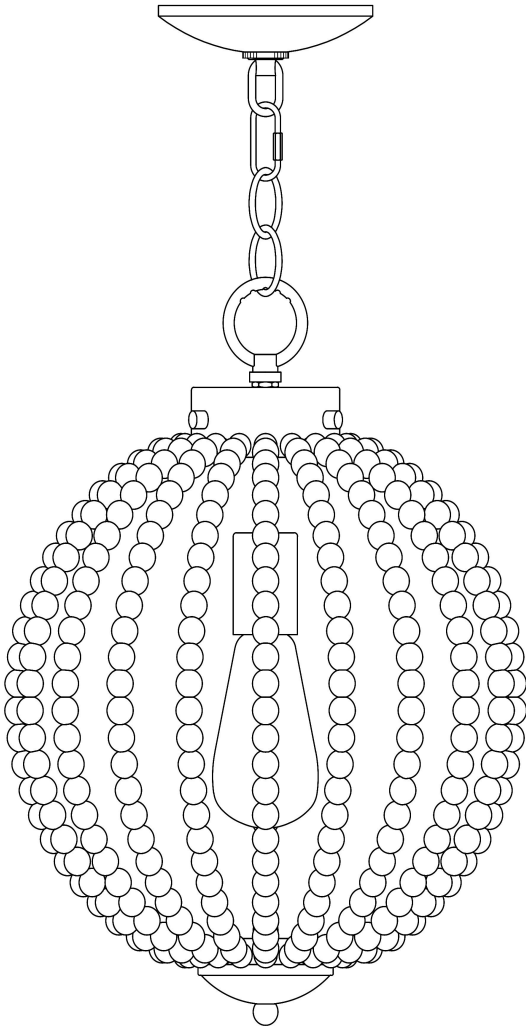


PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product.
Estimated Assembly Time: 20 minutes.

- 1. Fix the Mounting Plate(A) to the junction box with Mounting Screw (H).
- 2. Carefully remove the Lamp Body (J) from the Lamp Shade (L) by turning the Nut (G) counter clockwise
- 3. Turn clockwise to fix the lifting Loop (K) to the Lamp Body (J),
- 4. Chain (E) Through special Canopy (B) and Canopy Nut (D), Closable Link (F) is used to connect one Chain (E) to the Hanging Loop (C) and the other end to the Loop (K).
- 5. Connect the main line and ground wire on the lamp body with the main line and ground wire in the with the Wire Nut (I)

Connect, Hot, Black or Red Outlet Supply Wire to:	Connect, Neutral, White Outlet Supply Wire to:
Black	White
* Parallel Cord (round & smooth)	* Parallel Cord (square & ridged)
Clear, Brown, Gold or Black without Tracer (colored stripes)	Clear, Brown, Gold or Black with Tracer (colored stripes)
Insulated Wire (not green) with copper metal conductor	Insulated Wire (not green) with Silver metal conductor.



- Grounding Instructions:
- a) For installation in the United States: Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.
 - b) For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.

- 6. Push the Canopy(B) up to the ceiling and turn the Canopy Nut (D) clockwise to secure it
- 7. Insert the bulb (M) into the Sockets. Be sure to use light bulb(M) with wattage no greater than specified fixture. Always make sure that electrical current is turned off before changing bulb.
- 8. Carefully place the Lamp Body (J) into the Lamp Shade (L) and turn the Nut (G) clockwise to secure it

PLEASE USE TYPE "A" BULB MAX 40-WATT OR CFL BULB MAX 13-WATT OR LED MAX 9-WATT
THERE ARE 1 X 4W LED BULBS IN THE BOX.

ENJOY YOUR LAMP

