

identify them with parts list before



IMPORTANT: DO NOT TIGHTEN BOLTS AND SCREWS FULLY UNTIL YOU HAVE COMPLETED THE FINAL ASSEMBLY.

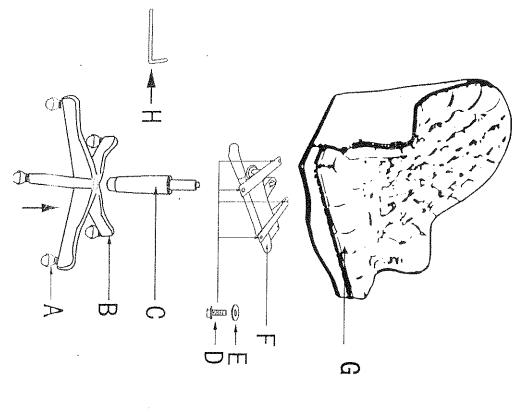

77
ĭ
nt 2
CASTERS (
3
STERS
S
$\widehat{\mathbb{E}}$
into
the
A) into the holes of 5 STA
앜
Ŋ
STAR
$\bar{\omega}$
TAR BASE (
®

- Insert GAS LIFT (C) to the center hole top of 5 STAR BASE (B)
- 3. Attach SEAT PLATE (F) to the Unit Seating(G) by using 4 SCREWS (D) with 4 FLAT WASHERS (E).
- Insert the gas lift into the pre-assembled seat unit to finish the final assembly.
 Resure that all the sorows are fully tightened before unit.
- Be sure that all the screws are fully tightened before using.

CASTERS 5

- B. 5 STAR BASE
 C. GAS LIFT
 D. SCREWS (5/1
-). SCREWS (5/16X1-1/2"
- E. FLATWASHERS
 SEAT PLATE
- 3. UNIT SEATING
- T. ALLEN KEY