



# Wall-Hung Elongated Toilet Bowl K-6918

#### **Features**

- One-piece wall-hung toilet.
- Compact elongated bowl offers added comfort while occupying the same space as a round-front bowl.
- Mounting hardware is completely concealed, allowing the design lines to remain intact when installed.
- Includes wall-hung bowl with Memoirs seat.

### Installation

- See installation guide and installation video for more detailed information.
- Pairs with the K-18829 in-wall tank and carrier system, and K-77271 Memoirs<sup>®</sup>, K-8857 Bevel<sup>®</sup>, K-4177 Droplet<sup>®</sup>, K-5413 Cue<sup>™</sup>, K-75890 Lynk<sup>™</sup>, and K-75891 Note<sup>™</sup> flush actuator plates.
- Also pairs with K-6284 in-wall tank and carrier system, and K-6298 Veil® flush actuator plate.

#### **Recommended Products/Accessories**

K-18829 2x4 In-Wall Tank & Carrier System K-77271 Flush actuator plate K-23726 Drain treatment





### Codes/Standards

ASME A112.19.2/CSA B45.1 ASME A112.19.14 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC)

## **KOHLER® Toilets and Seats Limited Warranty**

See website for detailed warranty information.

#### Available Colors/Finishes

Color tiles intended for reference only.


Color	Code	Description
	0	White
45	7	Black Black™





### **Memoirs®**

# Wall-Hung Elongated Toilet Bowl K-6918

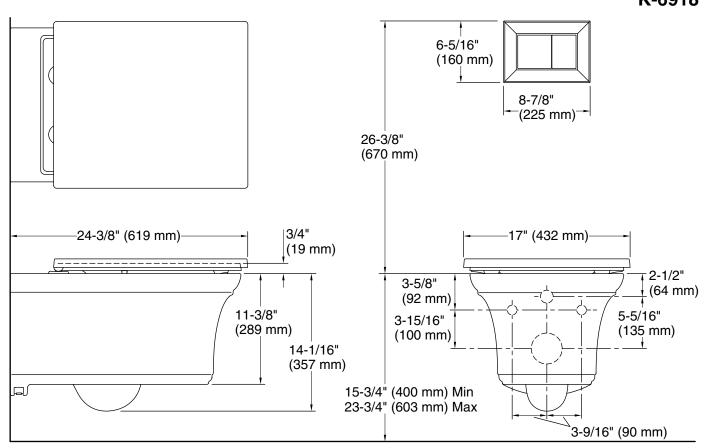

#### **Technical Information**

All product dimensions are nominal.

Trap passageway: 2-9/16" (65 mm)

Water Consumption

Full: 1.6 gpf (6 lpf)
Reduced: 0.8 gpf (3 lpf)

Water surface size: 5-1/4" x 4-1/8" (133 mm x 105 mm)

Rim to water surface: 8-1/2" (216 mm) Seat-mounting holes: 6-1/8" (155 mm) **Fixture Supply Requirements** 

Min static pressure: 20 psi (137.9 kPa) Max static pressure: 80 psi (551.6 kPa)

#### **Notes**

Install this product according to the installation instructions.

Toilet height is dependent on carrier settings.

