


ITEM#:223136 233188 233197

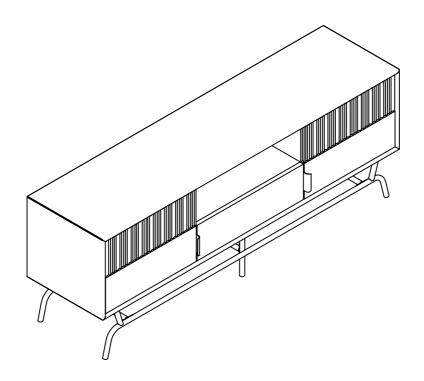


ASSEMBLY RATING

The Assembly Rating is a 5-point system that shows the degree of effort needed in assembling a specific product (with 1 being easy and 5 being difficult). For most products, two persons are recommended.

EASY OOOOODIFFICULT

Tools Required for Assembly:

Phillips Screwdriver



Phillips Screwdriver 11/2"L



Hammer





2 PERSONS RECOMMENDED

Page 1 of 17 VERSION: 20200313



Thank you for your purchase!

We hope you will enjoy your new product for many years to come. Our commitment to providing quality products does not simply end when a purchase is made. We stand behind our products and will provide any support needed in order for you to fully enjoy your purchase. Your satisfaction is the greatest recognition we could have.

Because we value your trust in our company,we will do our best to meet your service expectations. Should you have any assembly related questions, parts replacement requests, comments or suggestions, please feel free to contact us any time. To help expedite the service, please have the assembly instructions available, along with your order receipt.



www.foagroup.com



cs.ec@foagroup.com



Toll-Free 1-888-980-5122 or 1-626-363-9311



1-626-270-4451



Monday to Friday 8:30 a.m to 5:30 p.m.(PST)



https://twitter.com/foagroup

http://instagram.com/foagroup#

http://www.pinterest.com/foagroup/

https://www.youtube.com/user/FurnitureOfAmerica






ASSEMBLY & CAREADVICE

FOR YOUR FURNITURE TO LAST, CORRECT ASSEMBLY AND PROPER MAINTENANCE ARE NECESSARY PLEASE FOLLOW THE INFORMATION PROVIDED BELOW TO FULLY ENJOY YOUR FURNITURE.


BASIC ASSEMBLY TECHNIQUES




It is highly recommended that the assembly should be done near the area of its intended location. Make sure you have enough space to move around during the assembly.




Position each part correctly and insert screws or bolts into their respective holes by hand tighten or using the proper hand tool. Only tighten when step is completed or when instructed to do so.



Use cardboard or carpet area when assembling furniture to prevent scratches. Make sure the furniture rests on a flat and level surface with each leg evenly touching the floor.



ALWAYS have at least two people to help with transporting and assembling the product to avoid any potential injury and/or damage.



Make sure all parts are properly aligned, then use the appropriate hand tool to completely tighten the bolts or screws. Do not use power tools and do not overtighten.



Save the instructions and store any supplied tool for later maintenance. After two weeks, check and tighten any loose hardware and repeat again every six months thereafter.

IT IS THE USER'S RESPONSIBILITY TO MAINTAIN THE FURNITURE. THE HARDWARE MAY LOOSEN OVER TIME AND MAY CAUSE THE FURNITURE TO BE WOBBLY AND UNABLE TO SUPPORT ITS INTENDED WEIGHT CAPACITY. THIS MAY LEAD TO COLLAPSE AND MAY CAUSE SERIOUS INJURY.



FAILURE TO FOLLOW THE GUIDELINES ABOVE MAY RESULT IN INJURY AND/OR PROPERTY DAMAGE.

FURNITURE OF AMERICA.ALL RIGHTS RESERVED.


PRE-ASSEMBLY INTRODUCTION

Unless you are particularly adept at assembling flat-pack/knock-down furniture, we understand building ready-to-assemble furniture can be a frustrating experience for some. To help avoid confusion and to make the assembly process quicker and smoother, we have provided some helpful tips. Before you begin the assembly, please read the following:

- 1. Due to the size and/or weight on most of the ready-to-assemble furniture, it is highly recommended that the assembly should be done near the area of its intended location. Make sure you have enough space to move around during the assembly. ALWAYS have at least two people to help with transporting and assembling of the product to avoid any potential injury and/or damage.
- 2. To protect from damage, assemble the item on a clean, protective surface, such as on a carpet or cardboard.
- 3. Make sure you have taken all the parts and hardware out of their packaging. Do not throw away packaging material until assembly is completed.
- 4. Make sure all parts and hardware are accounted for by comparing the actual parts and hardware to the list provided in the assembly instructions. Also check for any irregularity such as crack, flaw or improperly drilled hole. If there is any problem or missing piece, please contact the manufacturer or the supplier. Please have the model number, part number and a brief description of the problem ready will help expedite the replacement process.
- 5. Read the entire instruction manual and view the diagrams first before assembling. Arrange your parts in order of use and group the identical hardware together to make it easier to grab each piece as you begin to assemble.
- 6. During the assembly process, make sure parts are properly aligned before tightening with the tool provided or required for the assembly. Do not use power tools and do not over tighten.
- 7. When applying glue to the wood dowels to bond the parts together, please be ABSOLUTELY certain that the parts are correct and lined up with each other (refer to diagrams and take notice of the various pre-drilled hole locations). When in doubt, assemble the parts together first and if the parts fit right, then apply glue to the wood dowels.




CAMLOCK FASTENER ASSEMBLY INSTRUCTIONS

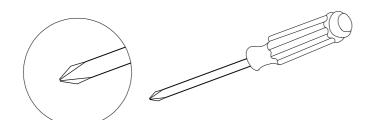

Note: Every cam lock bolt must have a cam lock connector in order to fasten the parts together.


(1) Secure the threded end of the cam bolt by using a screwdriver.



Align the cam connector with its side opening (or arrow) pointing to the small drilled hole.




(2)










(4)




Turn the cam connector with a screwdriver until it will not turn any more with light to moderate force.




Turn right(clockwise) to tighten.

PARTS LIST

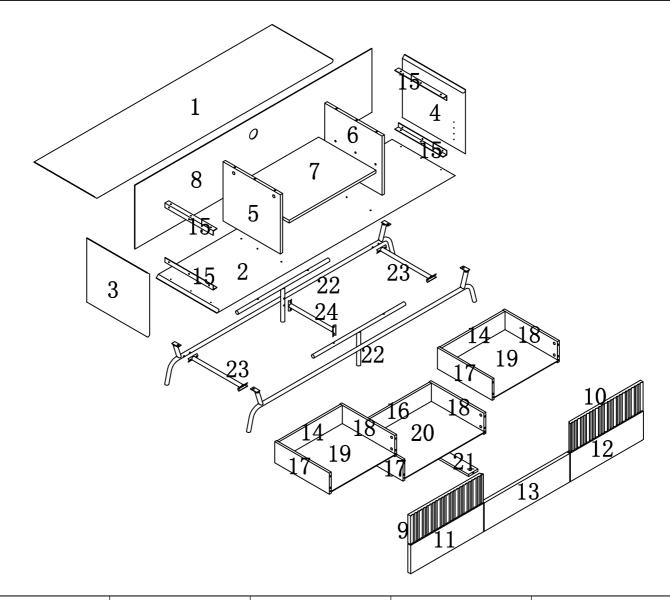


(1)	1pc	(7)	1pc	(13)	1pc (19)	2pcs
(2)	1pc	(8)	1pc	(14)	2pcs (20)	1pc
(3)	1pc	(9)	1pc	(15)	4pcs (21)	1pc
(4)	1pc	(10)	1pc	(16)	1pc (22)	2pcs
					3pcs (23)	
(6)	1pc	(12)	1pc	(18)	3pcs (24)	1pc



Before you begin, please read "Assembly and Care Advice", "Pre-Assembly Introduction" and "Cam Lock Fastener Assembly Instructions".


HARDWARELIST

A		L29	8pcs
В		ø 15	8pcs
\overline{C}		Ø 8x25	6pcs
D	(%) (%) (%)	φ 4x40	4pcs
E		φ 6x12	16pcs
F	(3) 222222222	\$\phi 4x30\$	14pcs
G^{G}		Ø6x30	4pcs
H H		64#	2pcs
I		\$\phi_3. 5x12	4pcs
J	0		26pcs
K K		L20	13pcs
L		Ф12	13pcs
M		\$\phi_3. 5x12	24pcs
N		197x5x1	lpcs
0		Ф8х40	1pcs
P		12x12x1	2pcs
Q	()	Ф 5х40	1pc
R	())))))))	Φ4x25	1pc
S		Ø 3.5x14	24pcs
T			4pcs
$oxed{U}_{-}$	-	M4	1pc





Due to the size and/or weight of this product, it is highly recommended that the assembly should be done near the area of its intended location. Make sure you have enough space to move around during the assembly. ALWAYS have at least two people to help with transporting and assembling the product to avoid any potential injury and/or damage









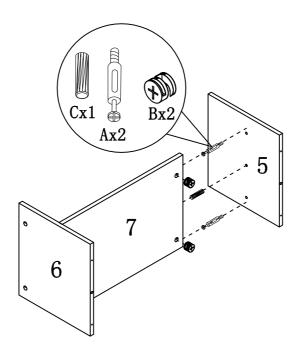


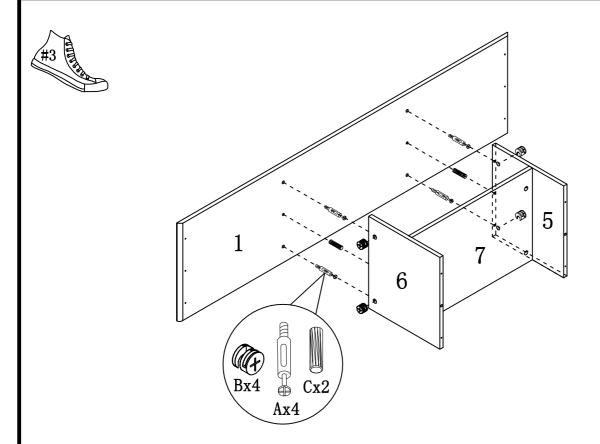

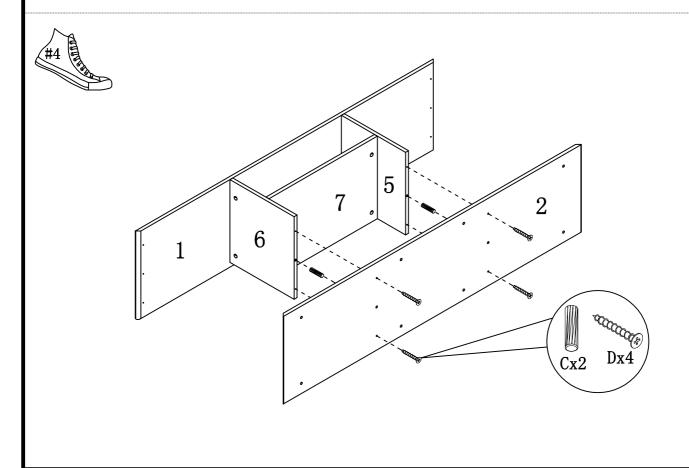


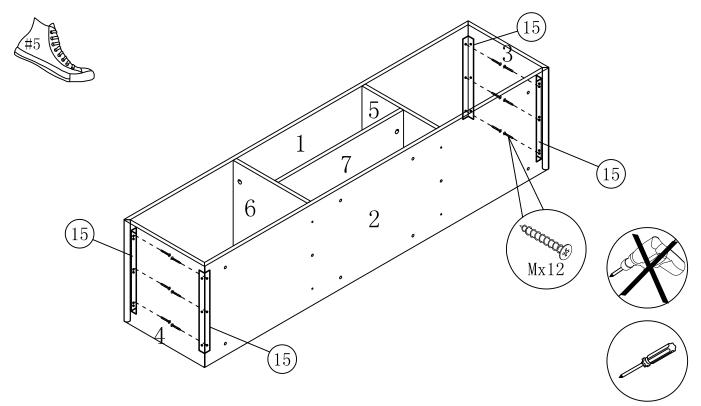


Note: Align the L-Bracket (#15) to the pre-drilled holes on panels #1 and #2. Then secure in place by using Screw (#M).

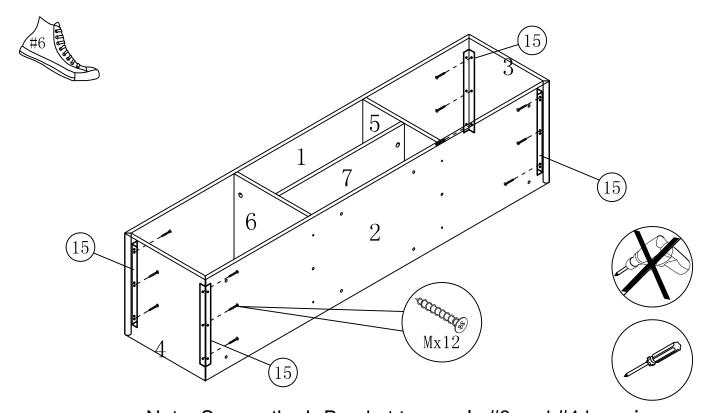



Note: Secure the L-Bracket to panels #3 and #4 by using Screws (#M). Please note there are no pre-drilled holes.

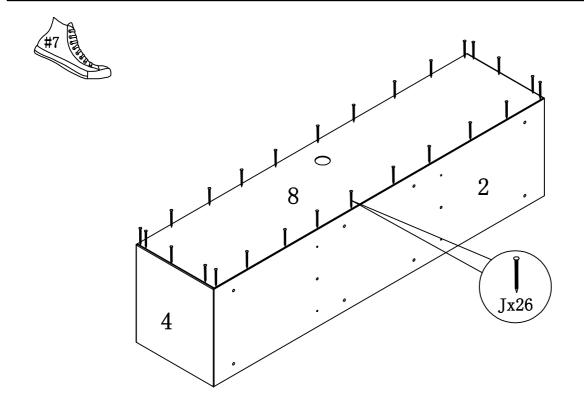

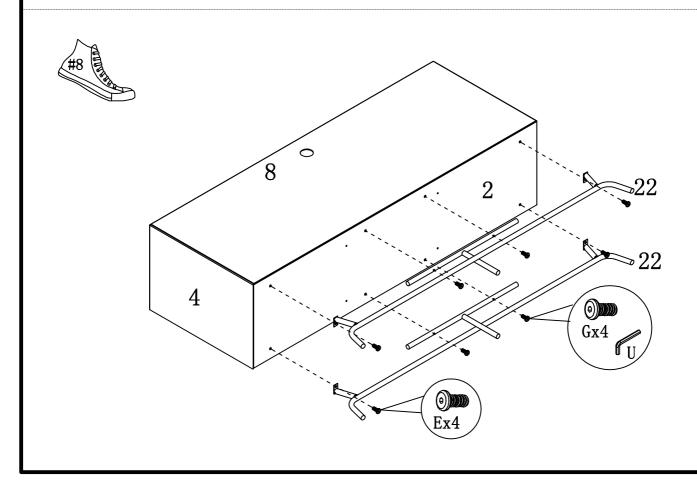




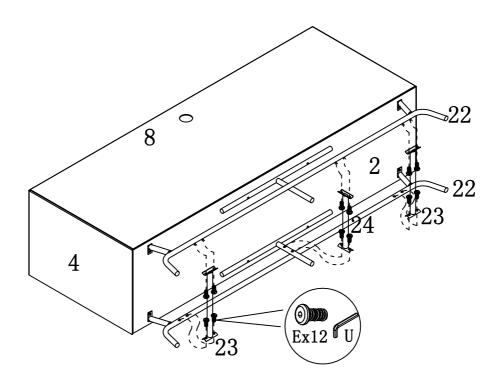


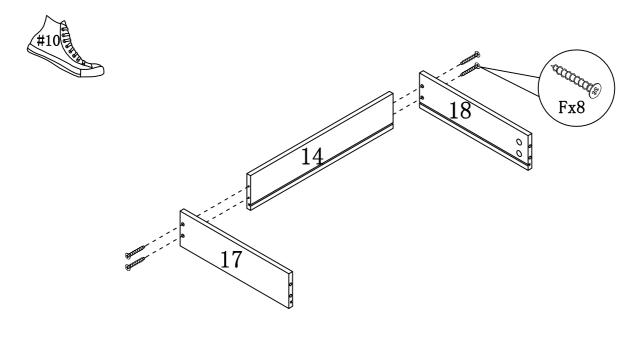


x2



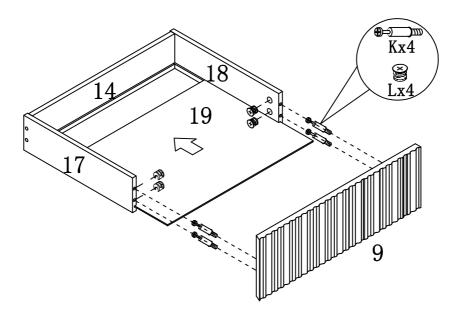


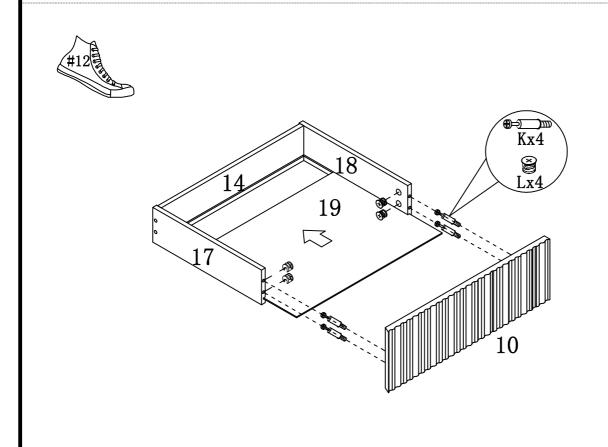




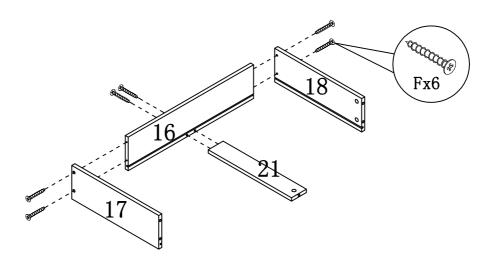




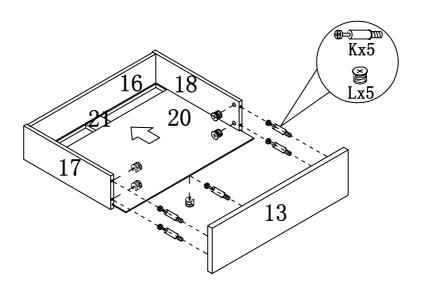




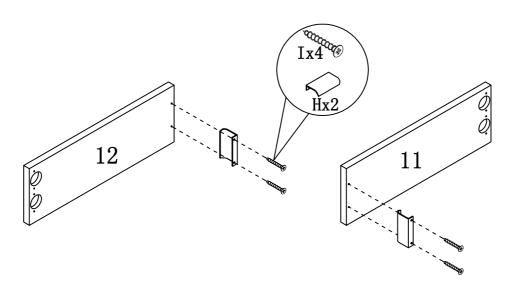

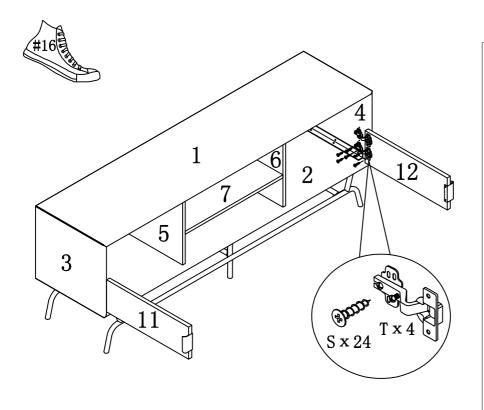

To adjust the door in or out,loosen this screw and push the door further in or push further out then retighten screws.



To adjust the door vertically, loosen the top and bottom screws, push the door up or down as necessary, then retighten screws.



To adjust the door left/right, turn this screw clockwise to move this corner of the door toward the frame, or counterclockwise to move door away from the frame.

Page 16 of 17




SAFETY STRAP TO PREVENT TIP-OVER

SAFETY STRAP TO PREVENT TIP-OVER

Drywall: Select a location where you want the table to be mounted. Place the assembled table against the wall and, on the wall, mark the location where the anchor will be placed. Drill a hole slightly smaller then the size of the screw . Push the anchor as far as it will go with your finger. Tap gently with a hammer until the anchor is flush with the wall surface. Secure the strap using a Phillips screwdriver to tighten the screw through the strap and into the anchor. On the other end of the strap, secure it using a Phillips screwdriver to tighten the screw through the strap and into the back of the table.

If the location happens to be a wood stud, do the following:

No anchor will be needed if securing to a wood stud. Drill a hole slightly smaller then the size of the screw . Secure the strap using a Phillips screwdriver to tighten the screw through the strap and into in the wall (wood stud). On the other end of the strap, secure it using a Phillips screwdriver to tighten the screw through the strap and into the back of the table.

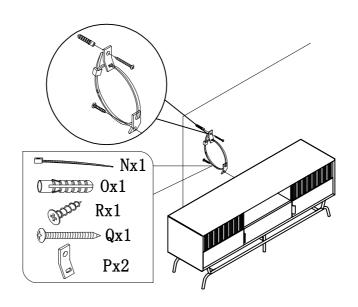

Before strapping, make sure the table is rested on a flat surface and does not feel loose or wobbly. If it does, double check that the bolts/screws are secured and properly tightened.

ASSEMBLY IS COMPLETED

