

Reeds triple floor IP67

T087708

SPECIFICATIONS



Design By

Klaus Begasse

Collection

Outdoor



Specifications

Delivered lumens	237lm
Light output ratio	8.78lm/W
Power consumption	27W
Led type	21X26W Array*
CCT (Correlated Color Temperature)	3000K
CRI (Color Rendering Index)	>80
Life expectancy	50000Hrs
Control type	On/Off
Input Voltage	120V
Driver	TCI - 3 x DCC-15W-350MA/US
BUG Rating	B0-U3-G0

Colors & Finishes

- ☐ Transparent (Rods)
- ☒ Anthracite grey (Base)


Materials

- Technopolymer aesthetic cover
- Base made up of a polycarbonate casing installed between 2 AISI316 stainless steel plates by AISI316 stainless steel screws
- Gasket made in silicone

Features & Accessories

- Water sealing is assured by a gasket
- Fixture can be fastened to floor by means of holes in the lower plate
- Supplied with a 4'11"-long H05RN-F 2x1 cable
- Standard non dimmable
- Electronic driver integrated

Dimensions

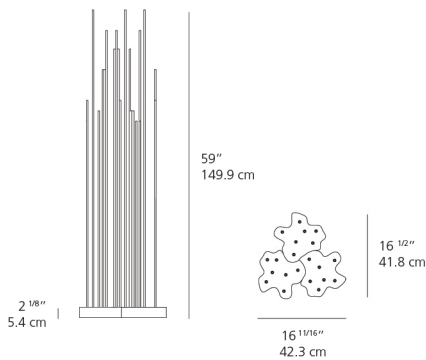

Packaging

2 Boxes

1 x 20-9/16" x 20-9/16" x 11-5/16" / 15.98 lbs - 52 cm x 52 cm x 28.5 cm / 7.25 kg

1 x 61-1/8" x 3-7/16" x 3-7/16" / 6.39 lbs - 155 cm x 8.5 cm x 8.5 cm / 2.9 kg

Light distribution


Indirect

Luminaire weight

16.27 lbs / 7.38 kg

Warranty

5 year limited warranty



Red = Max Cd. Through Vertical plane

Blue = Max Cd. Through Horizontal plane