

## Features

- Two-handle widespread lavatory faucet for 8" - 16" centers.
- UltraGlide engineered ceramic disc valves exceed industry longevity standards two times for a lifetime of durable performance.
- Premium metal construction.
- Handles pre-assembled on valves to simplify installation.
- Red/blue indexing.
- Quick-connect hose connectors make installation a snap.
- KOHLER finishes resist corrosion and tarnishing, exceeding industry standards two times.
- Pop-up drain with lift rod and metal tailpiece.
- 1.2 gal/min (4.5 l/min) maximum flow rate.
- Project pack six per case.



**ADA**

**CSA B651**

**OBC**

## Codes/Standards

ASME A112.18.1/CSA B125.1

NSF/ANSI 61

NSF/ANSI 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992

EPA WaterSense®

California Energy Commission (CEC)

ADA

ICC/ANSI A117.1

CSA B651

OBC

## KOHLER® One-Year Limited Warranty

See website for detailed warranty information.


## Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
-------	------	-------------



CP	Polished Chrome
----	-----------------

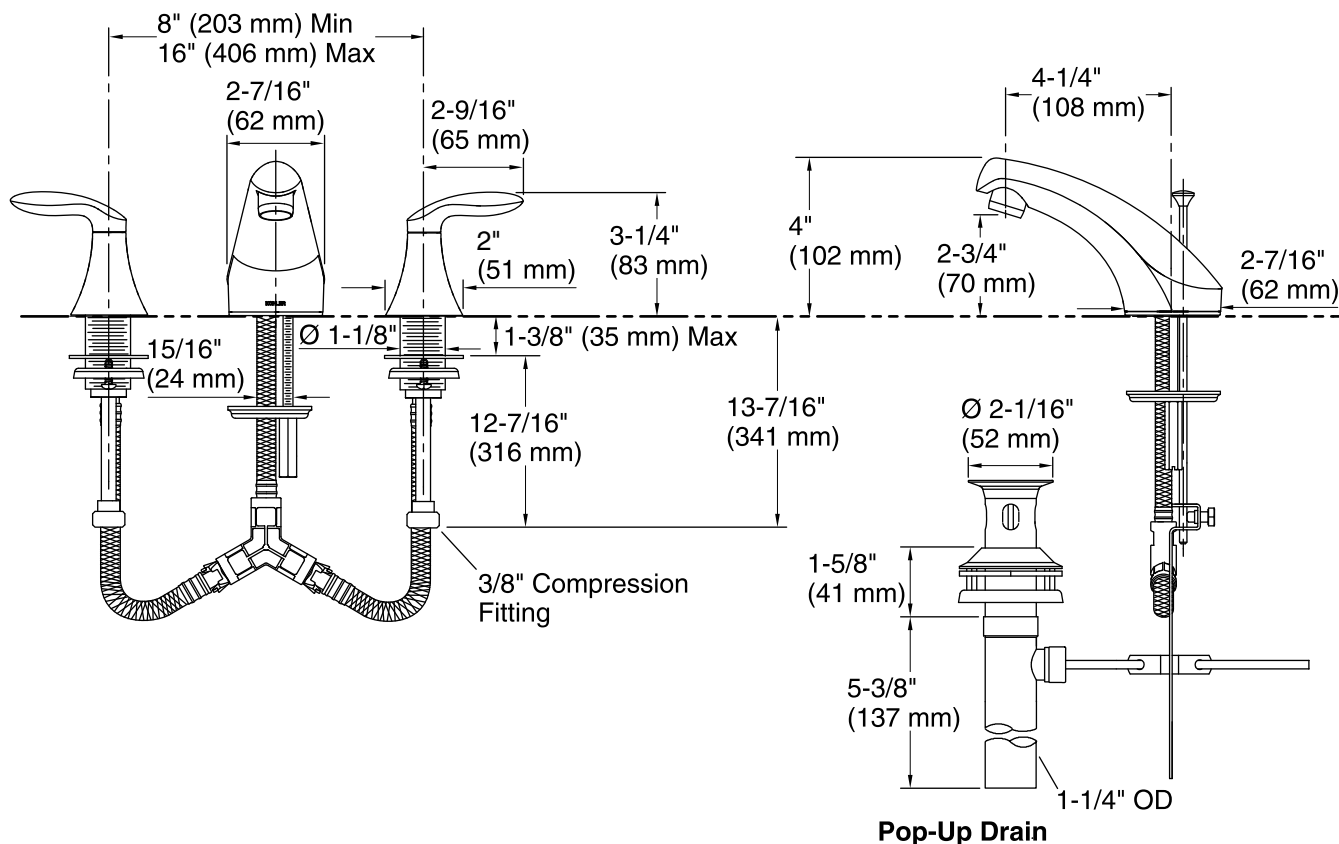

## Technical Information

All product dimensions are nominal.

### Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)  
Pressure: 60 psi (4.1 bar)  
Valve body: Machined-brass  
Drain with overflow: Yes  
Drain tailpiece included: Yes

### Spout:

Spout reach: 4-11/16" (119 mm)  
Handle clearance: 2-9/16" (65 mm)

## Notes

Install this product according to the installation guide.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.