

# **ASSEMBLY INSTRUCTIONS**

**Description: Lionel Bar Cart** 

## Important safety instructions:

- Please read carefully all instructions before assembly.
- For your safety and ease, assembly by two or more adults is recommended.
- Keep instructions for future use.

## Pre-assembly:

- Do not discard any content until assembly is complete to avoid accidentally discarding small parts or hardware.
- Take out all parts and hardware from box.

#### Parts List

Item	Description		QTY
P1	Top Frame		1
P2	Bottom Frame		1
P3	Left Side Frame		1
P4	Right Side Frame		1
P5	Back Rails		2
P6	Top Glass		1
P7	Ceramic		1
P8	Casters	₫	4



#### Hardware List

Item	Description		
H1	Short Bolts Ø1/4" *1/2"	<b>9</b>	8
H2	Long Bolts Ø1/4" *3/4"	<b>92</b>	4
Н3	Countersunk Bolts Ø1/4" *3/4"	(I)	4
H4	Lock Washers Ø5/16"	0	4
H5	Clear Plastic Pad	0	6
H6	Open Wrench		1
H7	Allen Wrench 4mm		1


#### **DISCLAIMER:**

WHEN PROPERLY ASSEMBLED, THIS ITEM IS SAFE FOR INTENDED USE. SELLER IS NOT LIABLE FOR ANY DAMAGES RESULTING FROM ITEM BEING IMPROPERLY ASSEMBLED AFTER PURCHASE.

## **Assembly Procedures:**


Step 1. Assemble the bar cart on a flat, soft surface such as a carpet or cloth to prevent scratching the finish.

- 1) Insert the inserted bar on side frame (P3, P4) to back rails (P5).
- 2) Attach top frame (P1) to two side frames (P3 & P4) using long bolts (H2). The arrow sign on the end of top frame (P1) should point to the floor..
- 3) Attach bottom frame (P2) to two side frames (P3 & P4) using countersunk bolts (H3). The arrow sign on the end of the bottom frame (P2) should point to the floor.

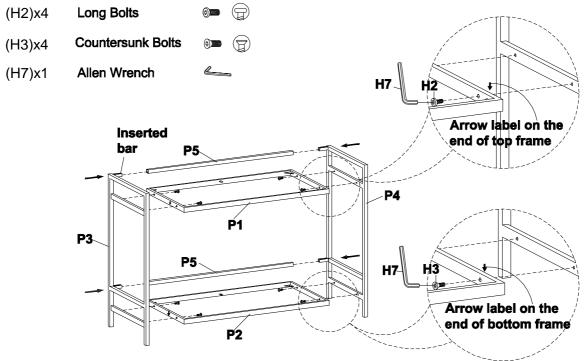

Step 2.


- 1) Use Allen wrench (H7) and short bolts (H1) to secure the back rails (P5) to two side frames (P3 & P4).
- 2) Securely tighten the casters (P8) to the side frames (P3/P4) through the lock washers (H4) with open wrench (H6) as shown below.

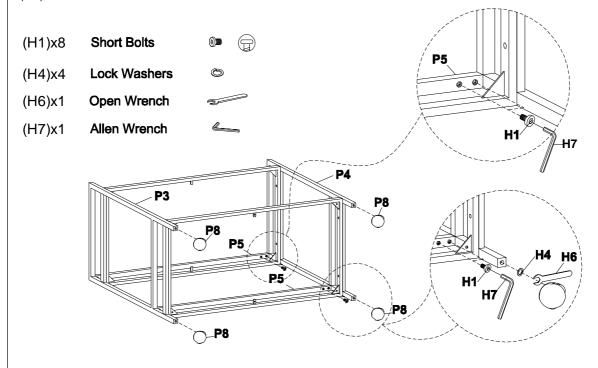

### Step 3.


- 1) Turn the assembled bar cart to an upright position.
- 2) Make sure the assembled bar cart is level and securely tighten all bolts with Allen wrench (H5).
- 3) Place the clear plastic pad (H5) on the assembly top frame as shown below.
- 4) Gently lay the glass (P6) on the table top.

(H5)x6 Clear Plastic Pad

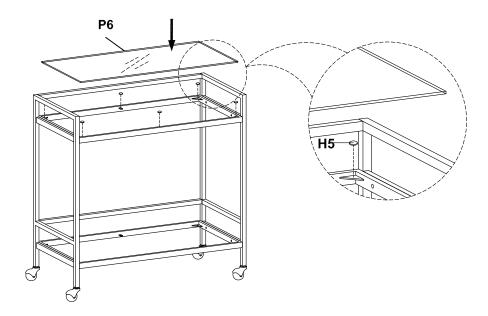

### Step 4.

1) Gently lay the ceramic (P7) on the bottom frame of bar cart. Assembly is complete.



Caution: Failure to follow these instructions may cause the bolts to misalign during assembly.

#### ADDITIONAL NOTE ABOUT SAFETY:

**BOLTS MAY LOOSEN DURING NORMAL EVERYDAY USE.** 

THEY SHOULD BE INSPECTED AT LEAST EVERY 3 MONTHS AND RE-TIGHTENED AS NEEDED TO PREVENT DAMAGE OR INJURY, AND ENSURE STABILITY.

Thank you for your purchase