VOVO STYLEMENT Install Guide



Easily install the WATERJET bidet by yourself!

Note: Before the installation, please check the size of your toilet using the template first.


Separate water supply hose

- Turn the water supply valve clockwise to lock, and separate the toilet hose using a spanner


Water supply valve

Connect the T-valve to the toilet and toilet hose


- Place the T-valve between the toilet and the toilet hose



- Remove the existing toilet seat.
 - Unfasten the nut and remove the toilet seat.
 - Save the old toilet seat lid and nuts for reinstallation later.
 - Place the template on the toilet after removing the toilet seat cover.




- Install the bidet and secure the remote control holder
 - Slide the bidet and install it.



 Secure the remote control holder to the wall with screws or peel off the double-sided tape sticker on the back of the remote


Install the base bracket.

- Place the fixing bolt on the base bracket.
- Align the front of the bidet body and the front of the toilet before fastening the nuts.



6 Connect the hose and turn on the water


- Connect the hose to the T-valve and the bidet.
- Turn the water supply valve counterclockwise to allow water flow.
- Connect the outlet.



How to use



VB-3000SE VB-3100SR VB-2500W VB-2600W

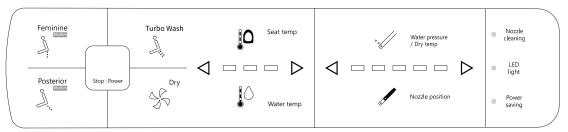

STOP:POWER

- Press the Stop button when you want to stop the function.

Dry

Use this after using wash function

- Wipe off the water with toilet paper before using dry function for pleasant using.

Water Pressure. Nozzle Position

- Can control in 5 levels of water pressure and nozzle position.

Water Pressure and Nozzle Position Adjustment

 Water pressure and nozzle position can be adjusted in 5 levels.



Auto Deodorization

(Except VB-3000SE, VB-3100SR)

- The default product setting is always ON on automatic deodorization.
- While someone sits on the seat (detects by the seat sensor) auto deodorization turns on and activates.


If a person stands up after using the bidet (if it is not detected by the seat sensor), it will be turned off after 1 minute of operation.


Auto Deodorization on/off

(Except VB-3000SE, VB-3100SR)

Without a person seating on the seat, the side panel has a feature of turning on/off using the dry button.

VB-4000SE VB-4100SR

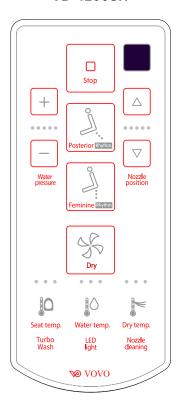



Power Saving

Press the STOP button once on the side control panel of the product without seating to operate power save mode. Press the STOP button once more without seating to turn off the power save mode.

Posterior/Rhythm

- Press Posterior/Rhythm button, to operate washing function.
- Press Posterior/Rhythm button again during using this function. Rhythm(Pulsating) function will work.

Feminine/Rhythm

- Press Feminine/Rhythm button. to operate Feminine function.
- Press Feminine/Rhythm button again when during using this function, Rhythm(Pulsating) function will work.

Turbo Wash

- Press Turbo button, Turbo wash will operate.
- It starts from the lowest water pressure.

Water Temperature, Seat Temperature **Dry Temperature**

- 3 levels of Water Temperature / Seat Temperature / Dry Temperature





Low Mid High 97°F 100°F 104°F

Nozzle Cleaning

- You can clean the nozzle by pressing the Nozzle cleaning button.

LED Light

The LED lamps illuminate the toilet bowl with a warm glow.

