


### Step 4 Cleaning and care


Daily cleaning and care are required in order to keep the product shining and properly working.

- 1 Clean it with water and dry it with soft cloth.
- 2 Clean the product with gentle liquid or glass cleaner.
- 3 Don't use acid cleaner.
- 4 Don't clean with abrasive material, abrasive paper or knife.

### Step 5 Parts list

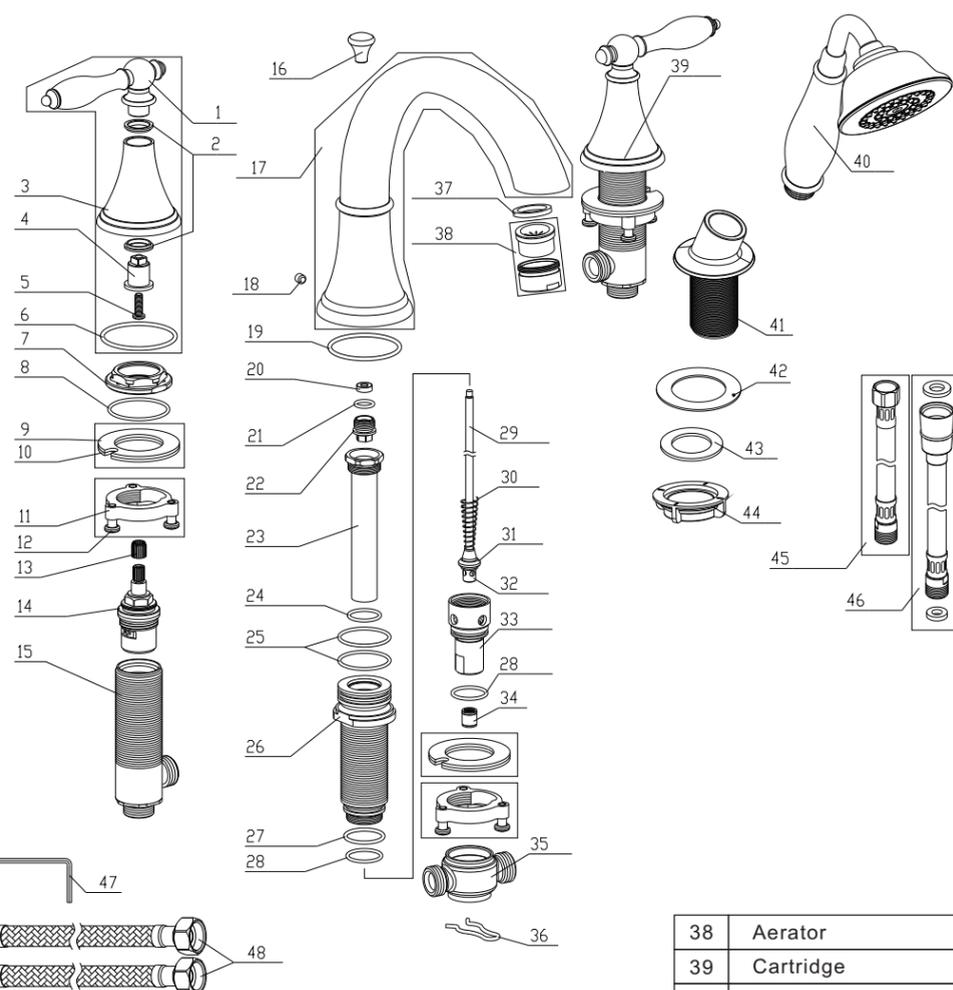

NO.	PART NAME
1	Handle Bar
2	Wearing ring
3	Handle Body
4	Cartridge locknut
5	Screw
6	O-Ring
7	Lock Nut
8	O-Ring
9	Washer
10	Metal Washer
11	Lock Nut
12	Screw
13	Handle Adapter
14	Cartridge
15	Valve Body
16	Knob
17	Spout
18	Screw
19	O-ring
20	Sealing Ring
21	O-ring
22	Adapter
23	Diverter Tube
24	O-ring
25	O-ring
26	Shank
27	O-ring
28	O-ring
29	Lift Rod
30	Diverter Spring
31	Washer
32	Diverter Core
33	Diverter Core Cover
34	Check Valve
35	Connector
36	Clip
37	Aerator Washer
38	Aerator
39	Cartridge
40	Shower
41	Shower Holder
42	Washer
43	Washer
44	Plastic Nut
45	Connect Hose
46	Pull-out hose
47	Allen Key
48	Connect Hose

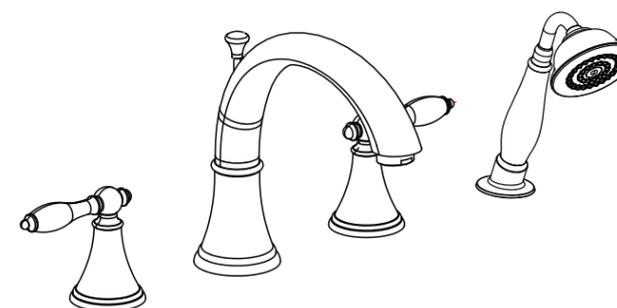


### ROMAN TUB FAUCET

The product is CUPC certified.

Original certification model code: 2B323CW1

ASME A112.18.1/CSA B125.1

### RECOMMENDED TOOLS OUTILS RECOMMANDÉS

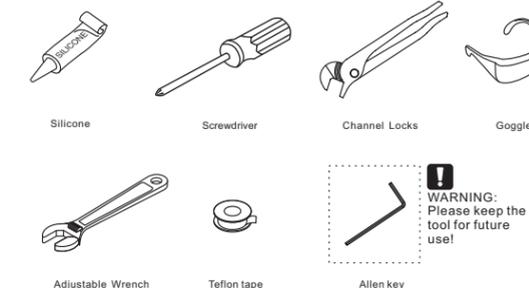


**! WARNING:**  
Please keep the tool for future use!




**Attention:**  
for easy installation, you will need:  
1. To read all the installation instruction completely before beginning.  
2. To read all the warning, attention and maintenance information.  
3. To purchase the proper supply lines.


### The tools might be applied to the following places:

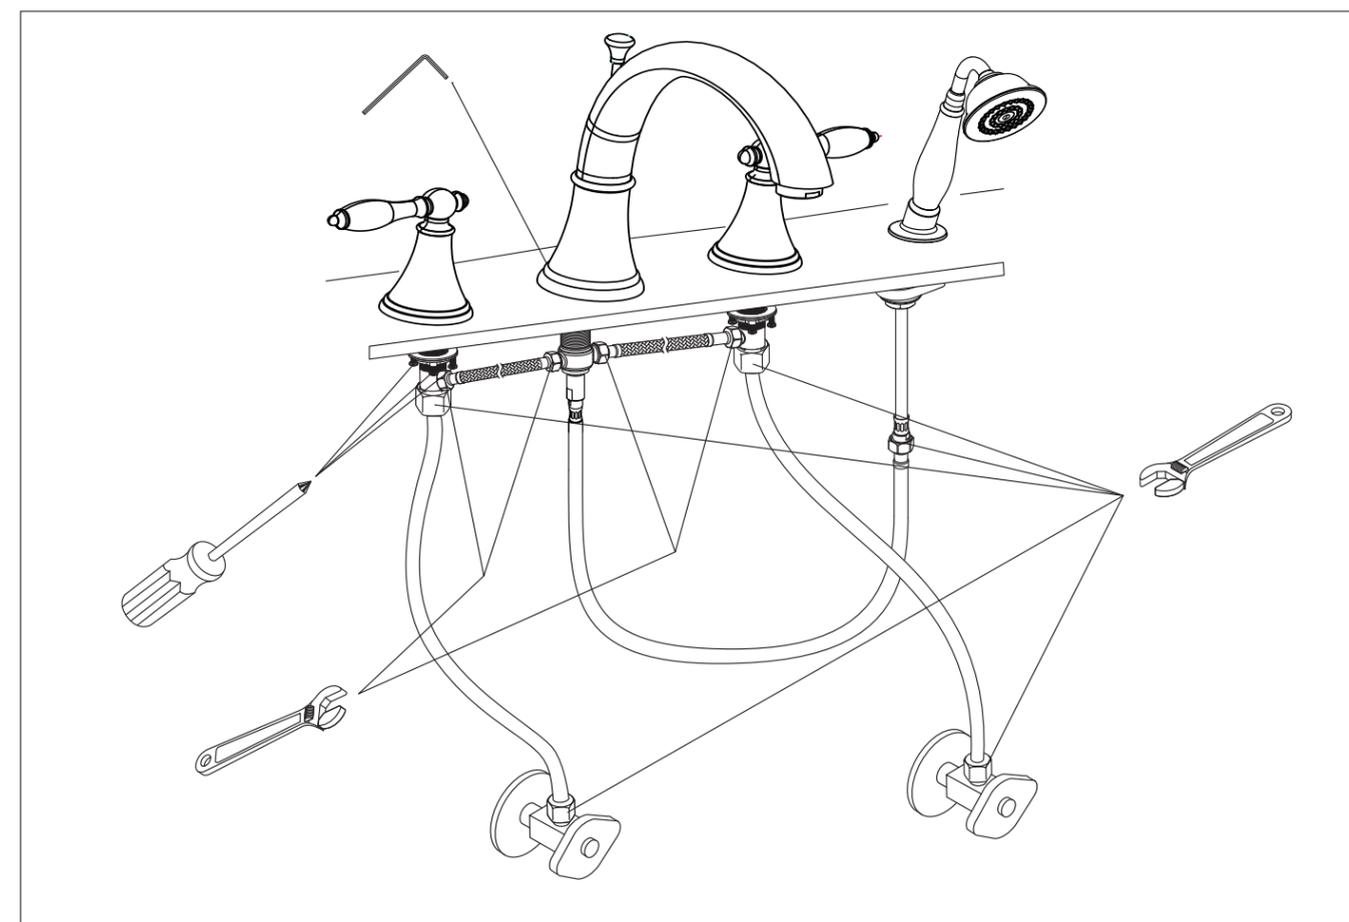


## Step 1 Faucet installation

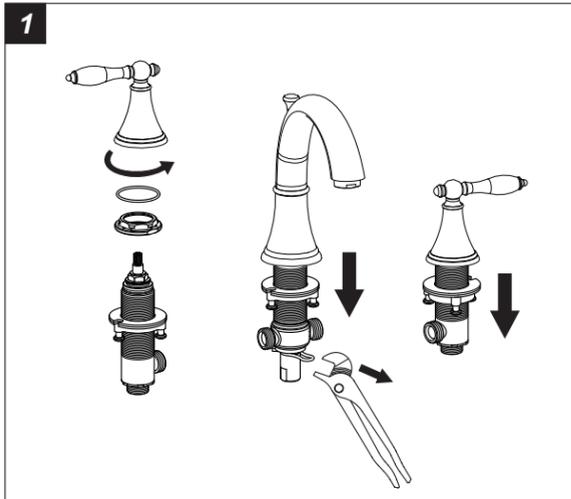


Disassemble the parts as photo.

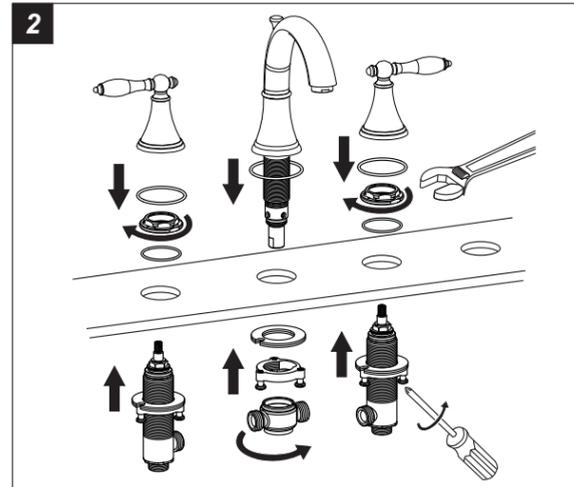

Position the parts as shown and secure each parts with tools respectively.

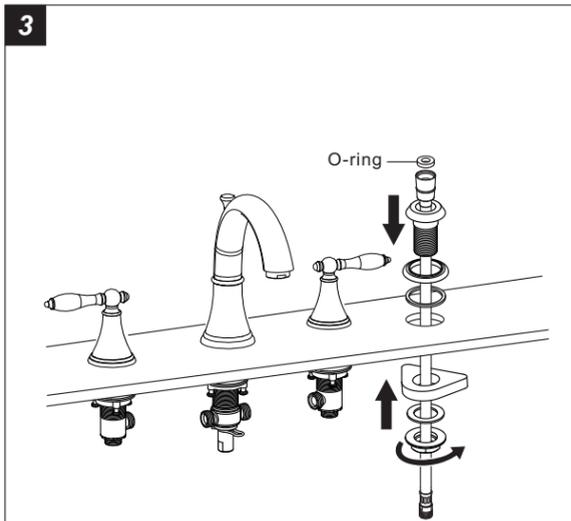


Position the hand shower and secure it with fixing kit.  
**Caution: DON'T FORGET THE O-RING BETWEEN THE HAND SHOWER AND HOSE.**

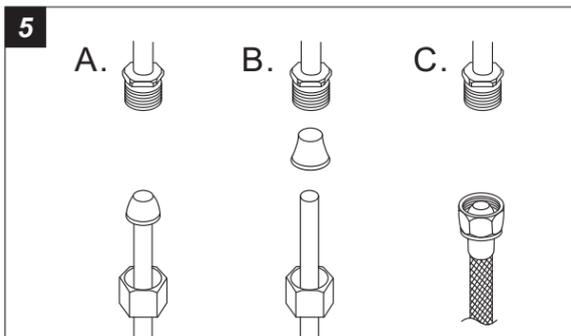


Connect to water supply lines with either:  
(A) 3/8" O.D. Copper tubing (ball nose risers with the coupling nuts) or;  
(B) 3/8" Copper tubing (no ball) with supplied tube head interior connector or;  
(C) IPS faucet connectors (1/2").

**!** Warning:  
The water supply lines are not included, please purchase them in plumbshop.

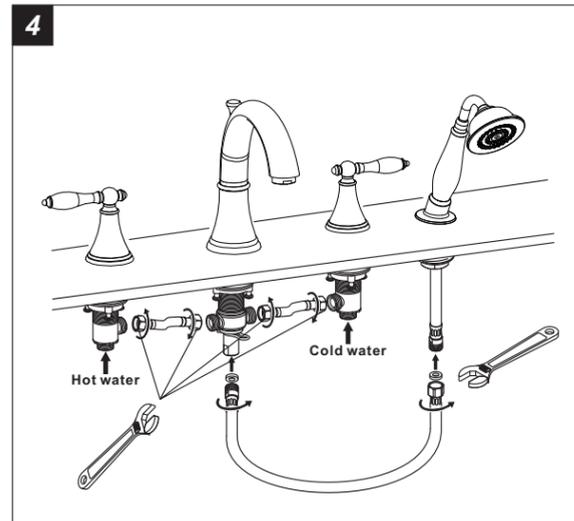

Connect the parts with supply lines as shown and tighten them with wrench.

## Step 2 Checking and testing

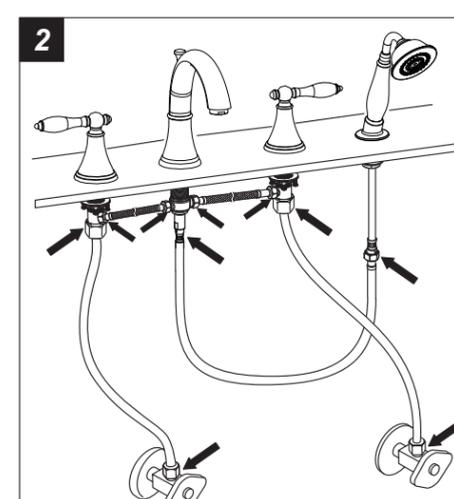


Check all connections at arrows for leaks, re-tighten it if necessary.


**!**  
**BUT DON'T OVERTIGHTEN**

## Step 3 Maintenance


If faucet leaks from the handle or drips from spout, please replace cartridge following the following steps:

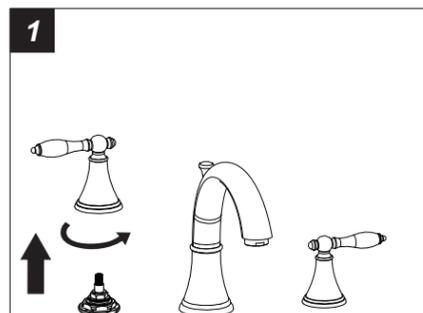

Disassemble the handle with hand.

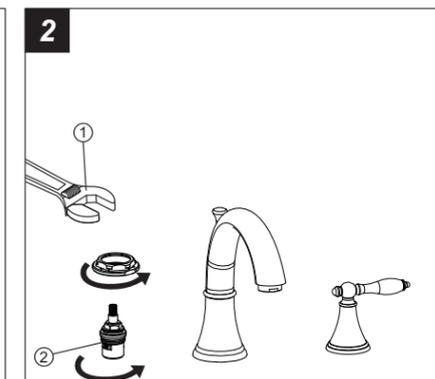

Unscrew the old cartridge<sup>2</sup> with Adjustable Wrench<sup>1</sup>, then take it out .

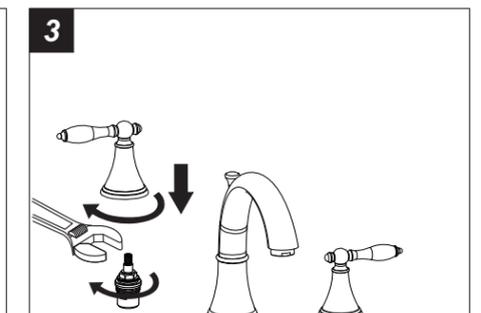

Place a new cartridge in the cartridge seat, tightening the cartridge with a spanner, then screw the handle with hand.