



ASSEMBLY INSTRUCTIONS

Cyrus Chandelier (Item#:II150-0010 & II150-0011&II150-0089)

Important Safety Instructions:

- **We recommend you contact a professional electrician to install any hardwired lighting. Incorrect installation can lead to fires.**
- These instructions are provided for your safety. It is very important that they are read carefully and completely before assembling fixture..
- This fixture has been rated for up to (6) **40-watt maximum TYPE B bulbs** or (6) **9-watt compact fluorescent light bulbs** . To avoid the risk of fire, do not exceed the recommended wattage.

Pre-assembly:

- Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.
- Remove all parts and hardware from box along with any plastic protective packaging.

Parts Enclosed:

Item	Description	QTY
A	mounting plate	1
B	canopy	1
C	cord collar	1
D	steel wire	1
E	fixture	1
F	socket metal cap	6
G	arm	3
H	socket	6
I	glass shade	6

Hardware Included:

Item	Description	QTY
a	mounting screws	2
b	plastic wire connectors	3
c	canopy screws	2
d	allen wrench	1
e	allen set screws	5
f	binding collar	1
h	thumb screws	18

To install you will need: Screwdriver/Electrical tape


To Adjust the Suspension Length of the Fixture:

- **Do not use the electric cord only, without Steel Wire (D) to support the weight of the lighting fixture. The adjustment or shortening the fixture's suspension length is only needed if the factory set Steel Wire (D) length is not appropriate for your installation.**
- Loosen the two Allen Set Screws (e) from the Binding Collar (f) using the Allen Wrench (d) by turning the wrench counter-clockwise.
- Release the Steel Wire (D) by removing the short end of the Steel Wire (D) from the Binding Collar (f) hole opening.

- Slide the Binding Collar (f) along the cable length above the Canopy (B) to the new desired fixture suspension length.
- While holding the Binding Collar (f) at the desired Steel Wire (D) position, insert the short end of the Steel Wire (D) back into the hole in the Binding Collar (f).
- Rotate both of the Allen Set Screws (e) clockwise into the Binding Collar (f) using the Allen Wrench (d) until tight.
- If needed, cut off any remaining excess Steel Wire (D) using a wire cutter so the Steel Wire (D) and Binding Collar (f) can properly fit inside the final assembled Canopy (B).

To Adjust the Arm direction of the Fixture.

- Loosen Allen Set Screw (e) located at the middle of the Arm (G) and adjust Arm (G) to desired angle and tighten the Allen Set Screw (e) using the Allen Wrench (d). **Please start this adjustment from bottom to top in turn.**

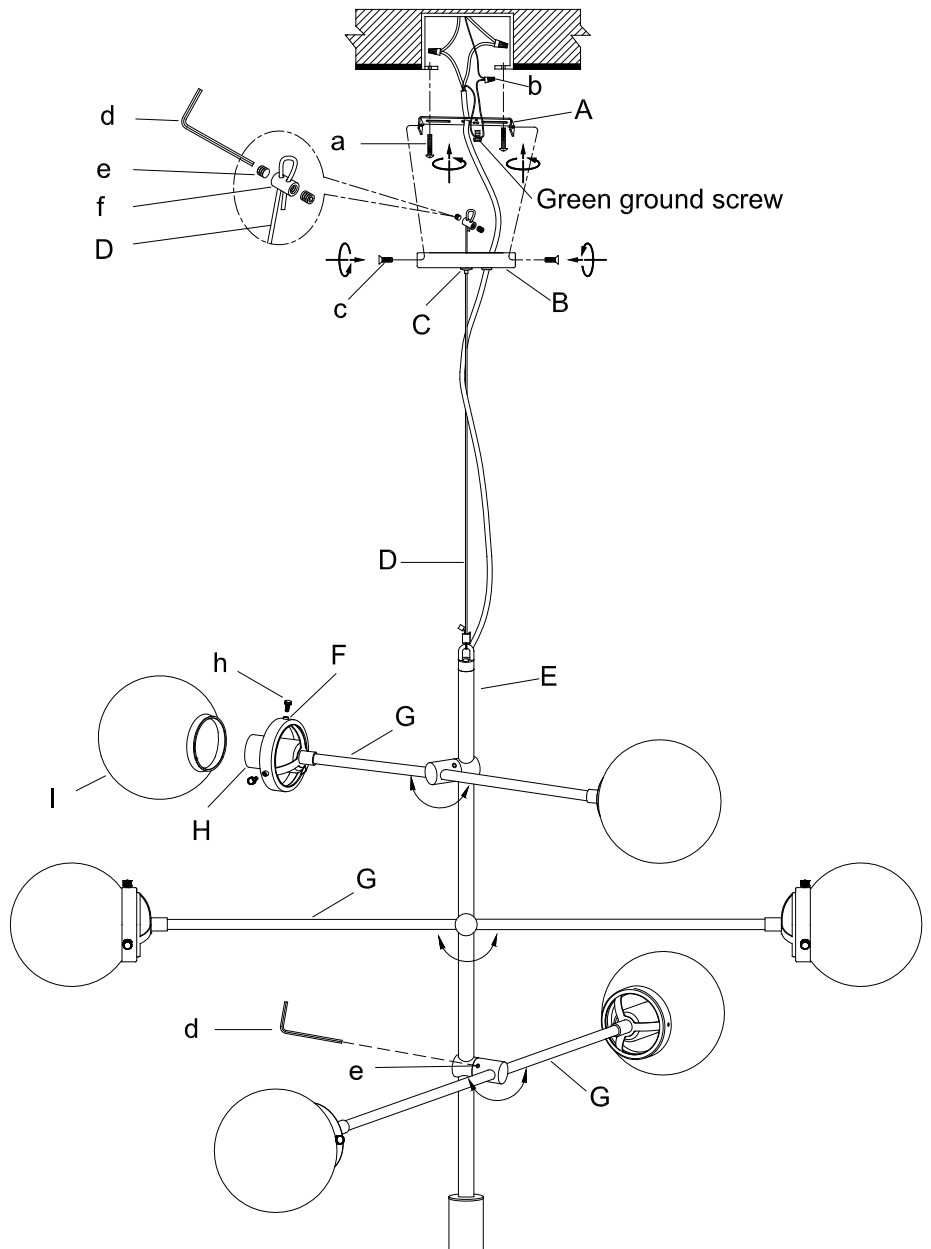

Care instructions:

- Wipe with soft dry cloth only
- Always avoid the use of harsh chemicals or abrasive as they may damage to the finish.

Thank you for your purchase