

Archer®

5' Whirlpool Bath K-1947



Features

- Single-speed whirlpool offers performance and value, with 8 fully adjustable jets.
- Hydromassage flow and direction can be controlled at each jet.
- Comfort Depth® design offers a convenient 19-inch step-over height while retaining the same depth as a standard 21-inch bath.
- Molded lumbar support offers extra comfort while bathing.
- Slotted overflow allows for deep soaking.
- Textured bottom surface
- Reversible drain.
- Coordinates with other products in the Archer collection.

Material

Acrylic

Hydrotherapy

Whirlpool

Installation

Drop-in

Additional Hydrotherapy Options

- Soaking Bath K-1946-0
- Soaking Bath + Bask heated surface K-1946-W1
- BubbleMassage air bath K-1947-G
- BubbleMassage air bath + Bask heated surface K-1947-GW
- VibrAcoustic K-1947-VB
- VibrAcoustic + Bask heated surface K-1947-VBW
- Whirlpool K-1947-0
- Whirlpool + heater K-1947-H
- Whirlpool + Bask heated surface K-1947-W1
- Whirlpool + BubbleMassage air bath K-1947-XHG

Required Products/Accessories

K-7271 Brass Slotted Overflow Bath Drain

or

K-7272 PVC Slotted Overflow Bath Drain

Recommended Products/Accessories

K-24916 Wireless Music Kit



Codes/Standards

ASME A112.19.7/CSA B45.10 CSA B45.5/IAPMO Z124 UL 1795 CSA C22.2 No. 218.2 Greenguard UL 2818 - Gold ADA ICC/ANSI A117.1

KOHLER® Plastic Baths and Receptors Lifetime Limited Warranty KOHLER® Hydrotherapy Components Five-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes


Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar
	33	Mexican Sand™





Archer® 5' Whirlpool Bath K-1947

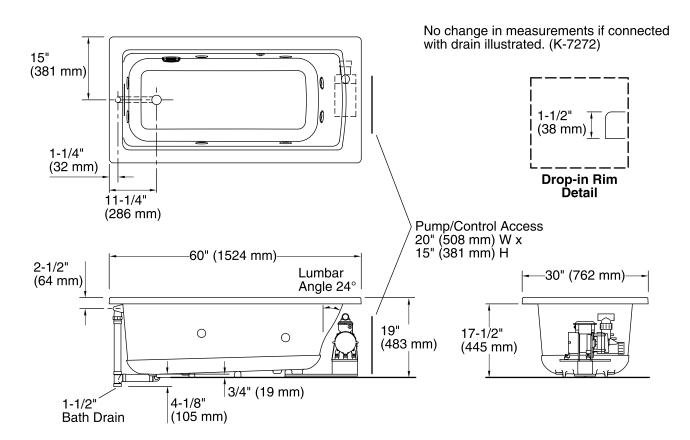

Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Pump: 120 V, 15 A, 60 Hz

Technical Information

All product dimensions are nominal.

Installation: Drop-in Drain location: End

Basin area, bottom: 45-1/8" x 19-11/16" (1146 mm x 500 mm) Basin area, top: 52-1/8" x 22-1/16" (1324 mm x 560 mm)

Weight: 98 lbs (44.5 kg)

Minimum floor load: 48 lbs/ft² (234.4 kg/m²)
Water depth: 15-1/8" (384 mm)
Water capacity: 57 gal (215.8 L)

Cutout: Drop-in, 58-1/2" x 28-1/2" (1486 mm x

724 mm)

Electrical component Pump: 120 V, 7 A, 60 Hz

rating:

Pump speed: Single
Minimum flat for door: 2" (51 mm)

Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

ADA compliant when installed to the specific requirements of these regulations.

