
Submitted Model No.:_	
Specific Features:	



# ▲ Designate proper finish suffix

Your Delta Faucet handshower incorporates a backflow protection system that has been tested to be in compliance with ASME A112.18.3 and ASME A112.18.1/CSA B125.1. It incorporates two certified check valves in series, which operate independently and are integral, non-serviceable parts of the wand assembly.

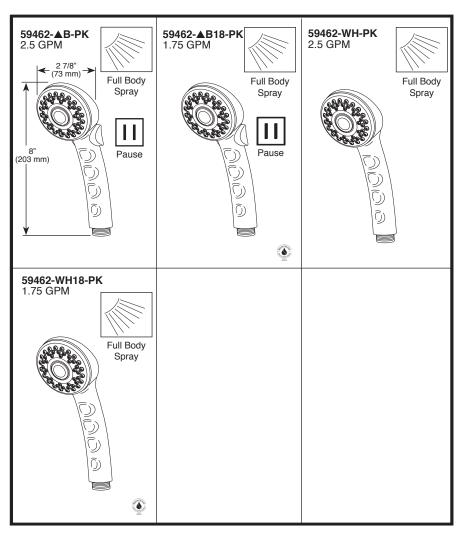

see what Delta can do

# PERSONAL HAND HELD SHOWERS NO MOUNT

■ Full Spray Handshower

### **STANDARD SPECIFICATIONS:**

- Maximum 2.5 qpm @ 80 psi, 9.5 L/min @ 550 kPa
- Maximum 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa
- Touch-Clean® nozzles to remove mineral deposits
- Pause flow by pressing the button on the handle not a positive shut-off
- Certified dual check valves for backflow protection

# **WARRANTY**

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

# **COMPLIES WITH:**

- ASME A112.18.1/CSA B125.1 ◆
- EPA WaterSense®

