



# ASSEMBLING & INSTALLATION INSTRUCTIONS

The drawing shown may not exactly match the product enclosed.  
However, the installation instructions do apply to this product.

## 8608

- ◆ **WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**
- ◆ **ATTENTION! COUPER LE COURANT AU FUSIBLE OU UN DISJONCTEUR.**

### ASSEMBLING THE FIXTURE (Fig.2)

1. Slide the electrical wires through the pipe(B) and column(A).Hook the end of pipe (B) to side loop of the column (A),then hook the other end to top loop of the frame (E).Hook the end of pipe (K) to bottom loop of the frame (E),then hook the other end to top loop of frame (N).
2. Place the glass (D) to the lamp holder of the frame (E), lock it securely with the ring (C). Thread the pipe nipple (F) to bottom center coupling of the frame (E) and fix it securely with the hex nut. Install the light bulbs (Not included) in accordance with the fixture specifications .Attach the glass (G) to bottom of the frame (E) and lock it securely with the knurled nut (H).Attach the cover (I) to the glass (G), lock it securely with the finial (J).
3. Place the glass (M) to the lamp holder of the frame (N), lock it securely with the ring (L). Thread the pipe nipple (O) to bottom center coupling of the frame (N) and fix it securely with the hex nut. Install the light bulbs (Not included) in accordance with the fixture specifications . Attach the glass (P) to bottom of the frame (N) and lock it securely with the knurled nut (Q).Attach the cover (R) to the glass (P), lock it securely with the finial (S).
4. Install the light bulbs (Not include) in accordance with the fixture specifications. **NOTE: DO NOT EXCEED THE SPECIFIED WATTAGE!**

### HANGING THE FIXTURE (Fig.1 Please see the Page.2)

**IMPORTANT: For a safe and secure installation, this fixture must be installed by means of support that is independent of the junction box.**


1. Shut off the power at the circuit breaker and remove old fixture from ceiling, including the old crossbar.
2. Provide a 1/4" IPS pipe screw with one end securely mounted to a beam or a structural member. The other end should protrude through the center of the junction box as shown. The junction box is not included.
3. Assemble the hex nuts, lock washer, hex coupling, pipe screw and ceiling loop(product shall prevail) to center 1/4"IPS support pipe and adjust overall length to allow the lock ring to hold the canopy flush to the ceiling. When the adjustments have been completed, secure the three (3) hex nuts, as shown.
4. Attach the chain to the fixture loop. Slip the lock ring and canopy over the upper end of the chain. Open the open link of the chain and lift the fixture to attach to the ceiling loop and close the open link.
5. Lace the fixture wires, ground wire and safety cable through the chain and loop, exiting through the side of the hex coupling.
6. **IMPORTANT: you must, run the safety cable through the two clamp bolts, then through the top of the junction box and secure to structural member. NOW, fasten the end of safety cable through the two clamp bolts(see fig.1), lock them securely with the four small hex nuts until tight.**

### CONNECTING THE WIRES (Fig.3)

1. Take the black wire from the ceiling junction box and the smooth wire leg from the fixture and twist bare ends together. Twist wire connector onto end of wire until snug.
2. Repeat same process with white junction box wire and ribbed wire leg of fixture wire. **NOTE:** Twist wires together in the same direction you twist the wire connector onto wires.
3. If your junction box has a grounding wire (green or bare copper), attach this wire and the

- bare copper wire from the fixture together as **step 1.**
4. Tuck these wire connections neatly into the ceiling junction box and then raise the canopy all the way to the ceiling. Raise the lock ring to the bottom of canopy, screw it with until tight. **Your installation is now complete. Return power to the junction box and test the fixture.**

FIG.2

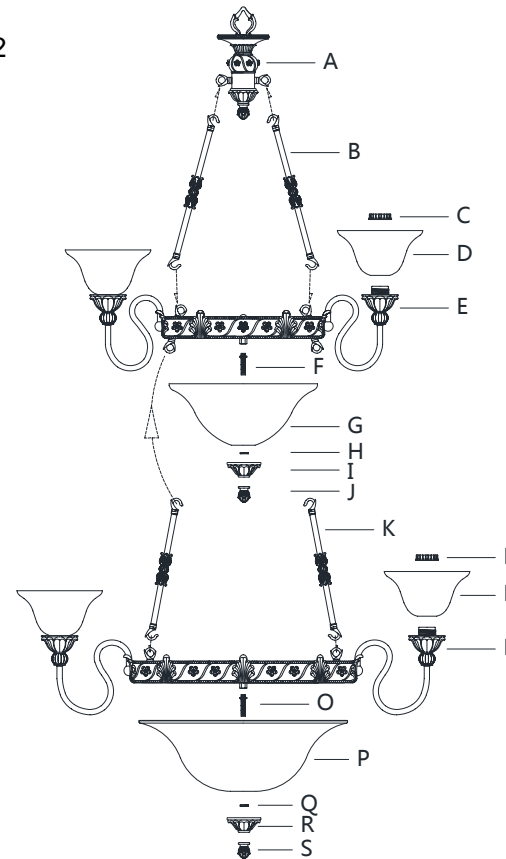

Canopy



Clamp

Bolt




Hex Coupling

FIG.3



FIXTURE WIRES  
Black or Smooth

HOUSE WIRES  
Black(Hot)



FIXTURE WIRES  
White or Ribbed

HOUSE WIRES  
White (Neutral)



FIXTURE WIRES  
Bare Copper (Ground)

HOUSE WIRES  
Green or Bare Copper(Ground)

Thank you for purchasing a **LIVEX** product.  
Need assistance with parts or assembly? Please call customer service at: **800-761-8056**  
Or visit us online at: [WWW.LIVEXLIGHTING.COM](http://WWW.LIVEXLIGHTING.COM)

# ASSEMBLING & INSTALLATION INSTRUCTIONS FOR HEAVY MOUNTING FIXTURE

## Fig.1

