

Assembly Instruction

Note: The below diagram illustrates the installation of your new luminary. This is a representative drawing and is not intended to match the style of your luminary.

Assembly

1. Carefully layout all parts in a line on a smooth surface.
2. Screw the threaded pipe onto the wire box.
3. Unscrew the finial from the threaded pipe, then place the shade onto the threaded pipe and secure with finial.
4. Install E26*bulbA*2*60W/max (Not Included) or E26*2*13W*CFL BulbA(Not Included).

Caution: Refer to the wattage caution label located near the lamp holder for recommended maximum wattage, do not exceed recommended wattage.


5. Insert plug into wall receptacle

Warning: Do not attempt to replace the bulb while the lamp is plugged into a wall receptacle.

How to change the base bulb:

1. Unscrew the wing nut from down- base, remove the old bulb and replace with a new one E12*1*7W max (Not Included) or E12*1*0.5W LED (Not Included).

Caution: Refer to the wattage caution label located near the lamp holder for recommended maximum wattage, do not exceed recommended wattage

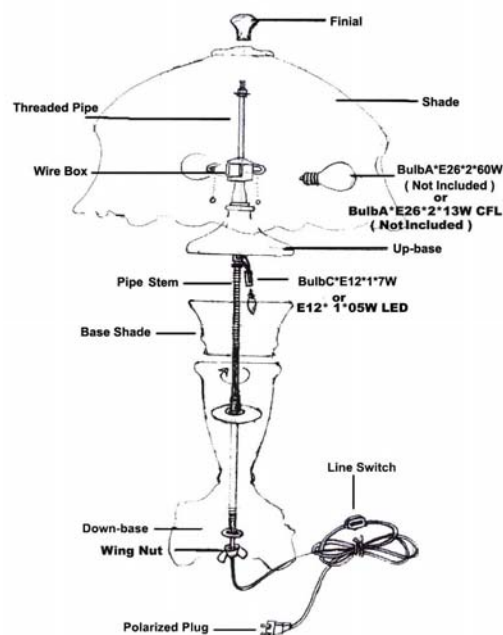

Important Safety Instructions

This polarized plug (one blade is wider than the other) as a safety feature to reduce the risk of electric shock. This plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit it, contact a qualified electrician. Never use with an extension cord unless plug can be fully inserted. Do not alter the plug.

Note: This stained glass product has been protected with mineral oil as part of the finishing process. Please use a soft dry cloth to remove any excess oil.

