



ASSEMBLY INSTRUCTIONS

Description: Sadie Coffee Table



Important safety instructions:

- Please read carefully all instructions before assembly.
- For your safety and ease, assembly by two or more adults is recommended.
- Keep instructions for future use.







Pre-assembly:


- Do not discard any content until assembly is complete to avoid accidentally discarding small parts or hardware.
- Take out all parts and hardware from box.

Parts List

Item	Description		QTY
P1	Table Top		1
P2	Support Panels		3

Hardware List

Item	Description		QTY
H1	Metal Plate 136*118*3 mm		2
H2	Short Bolts Ø1/4"*5/8"		12
H3	Long Bolts Ø1/4"*1-1/2"		6
H4	Lock Washers Ø1/4"		6
H5	Flat Washers Ø1/4" (16mm)		6
H6	Allen Wrench 1/4"		1

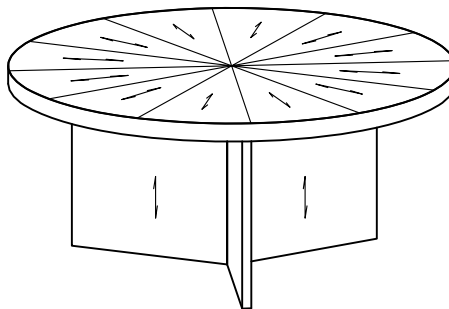

DISCLAIMER:

WHEN PROPERLY ASSEMBLED, THIS ITEM IS SAFE FOR INTENDED USE. SELLER IS NOT LIABLE FOR ANY DAMAGES RESULTING FROM ITEM BEING IMPROPERLY ASSEMBLED AFTER PURCHASE.

Assembly Procedures:

Step 1. Assemble the table on a flat, soft surface such as a carpet or cloth to prevent scratching the finish. Attach the three support panels (P2) together as shown below.


(H1)x1 Metal plate 136*118*3 mm



(H2)x6 Short Bolts Ø1/4"*5/8"



(H6)x1 Allen Wrench 1/4"

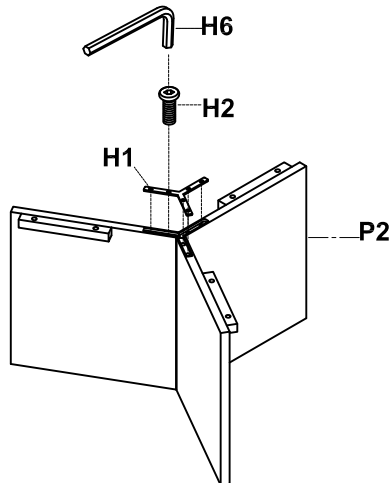

Step 2. Attach the metal plate (H1) to the assembled support panels (P2) as shown below.


(H1)x1 Metal plate 136*118*3 mm



(H2)x6 Short Bolts Ø1/4"*5/8"



(H6)x1 Allen Wrench 1/4"

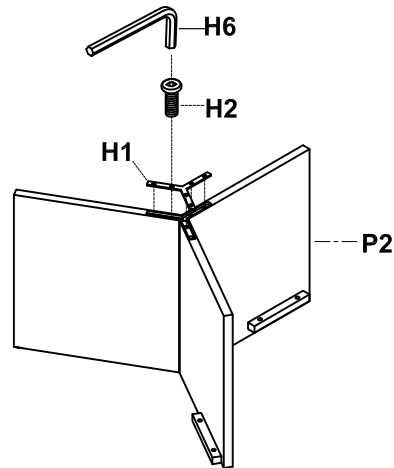

Step 3. Attach the assembled support panels (P2) to the bottom of table top (P1) as shown below.

(H3)x6 Long Bolts Ø1/4"*1-1/2"




(H4)x6 Lock Washers Ø1/4"




(H5)x6 Flat Washers Ø1/4"(16mm)



(H6)x1 Allen Wrench 1/4"

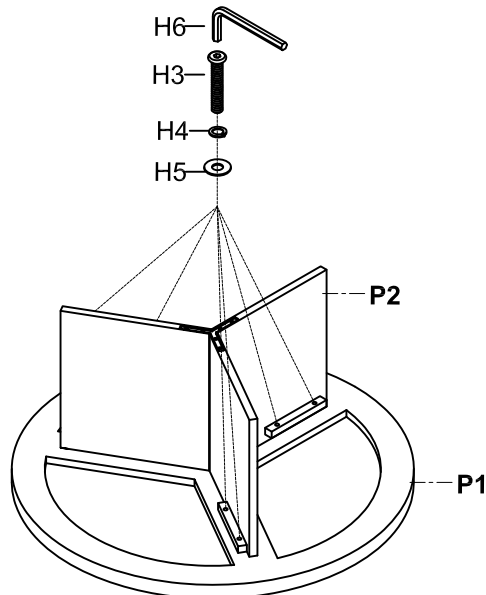

Step 4. Securely tighten all bolts with Allen wrench(H6), turn the assembled table to an upright position, make sure the table is level, aligned properly. Assembly is complete. **Failure to follow these instructions may cause the bolts to misalign during assembly.**

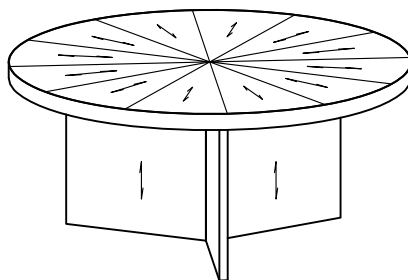

ADDITIONAL NOTE ABOUT SAFETY:

BOLTS MAY LOOSEN DURING NORMAL EVERYDAY USE.

THEY SHOULD BE INSPECTED AT LEAST EVERY 3 MONTHS AND RE-TIGHTENED AS NEEDED TO PREVENT DAMAGE OR INJURY, AND ENSURE STABILITY.

Thank you for your purchase